



# *Complete System for shower room*


Floors to match your imagination

**Gerflor**

# Floor / wall complete system for shower rooms




K5

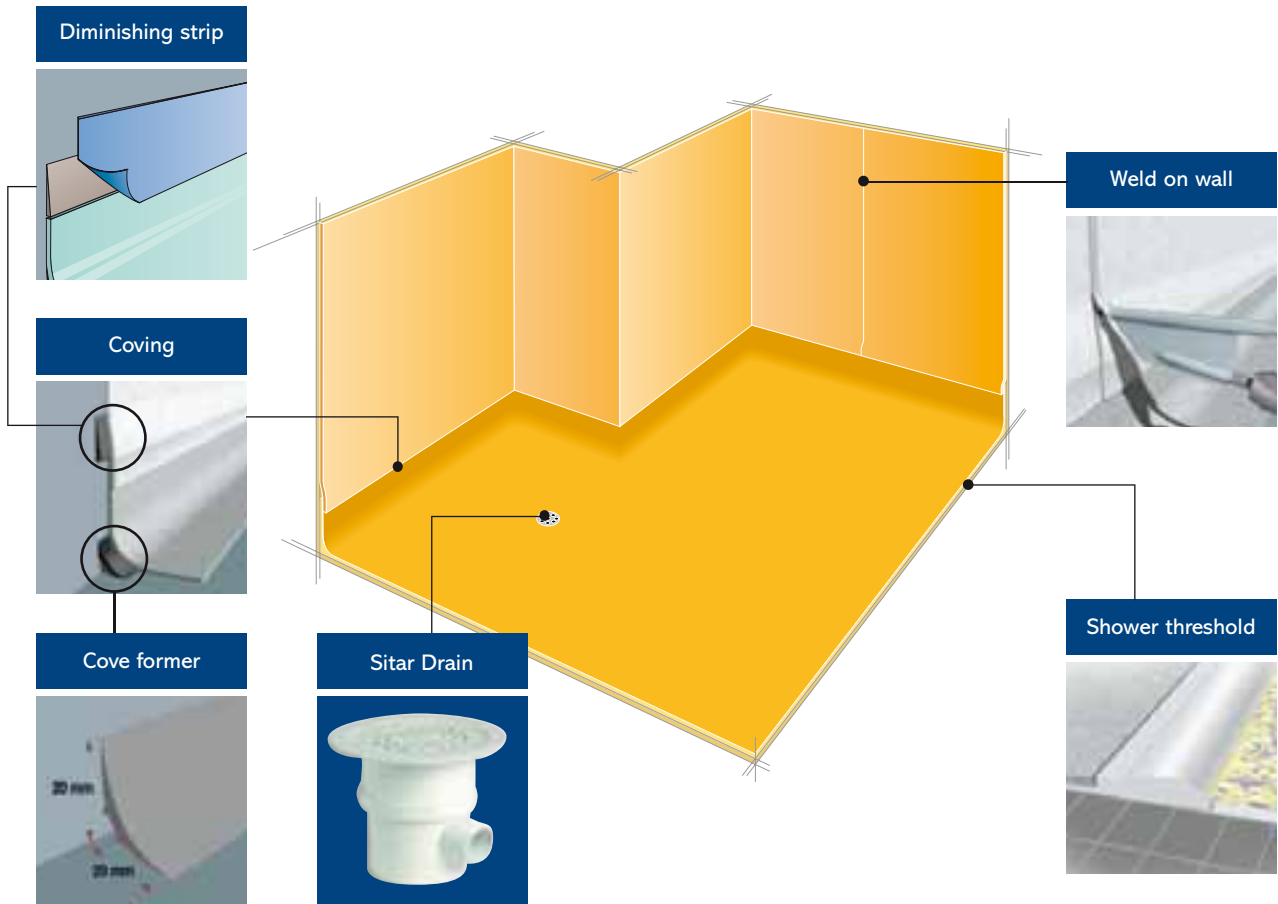

## Taradouche mural

Is a wall cladding.  
Colours can be coordinated with the floorcovering.

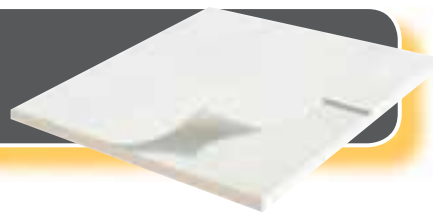


## Brazilia SD



Flexible multilayered calandered floor covering

1 mm pure PVC wear layer  
Backing reinforced with glass fibre grid

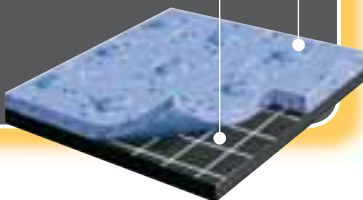

- **SAFETY:**  
Embossed wear layer for wet bare foot traffic
- **HYGIENIC:**  
Anti-bacterial and fungicidal
- **WATERTIGHT SYSTEM:**  
All seams to be hot welded

Sanosol® treatment

## Elegance SD



Flexible homogeneous calandered compacted floor covering

2.4 mm thick



# Complete System for shower room

The new TARADOUCHE SHOWER SYSTEM consists of :

## > FLOOR COVERINGS

**BRAZILIA SD** is a multilayered calandered floorcovering available in 2 m sheet, treated with SANOSOL®, an anti-bacterial and fungicidal treatment. It should be hot welded with a CR 40 welding rod.

It comprises a pure PVC wear layer over a through thickness design, (specifically embossed for wet barefoot traffic) and a flexible vinyl backing reinforced with a glass fibre grid.

Or

**ELEGANCE SD** is a flexible homogeneous calandered compacted floorcovering available in 2 m sheet, anti-bacterial and fungicidal, with a non directional polychrome design, to offer an even colour throughout the thickness. It should be hot welded with a CR 40 welding rod.

ELEGANCE SD is specifically embossed for wet barefoot traffic and has a group P wear rating.

## > WALL COVERING

**TARADOUCHE MURAL** is a flexible vinyl sheet wall covering, available in 2 m sheet, which should be hot welded with a CR 41 welding rod.

It comprises a transparent vinyl wearlayer combined with a colour blended flexible vinyl underlayer.

			Brazilia SD	Elegance SD	Taradouche Mural
<b>DESCRIPTION</b>					
Total thickness	EN 428	mm	2.2 (on grainside)	2.4 (on grainside)	0.9
Weight	EN 430	g/m <sup>2</sup>	2200	3100	1 500
Width / length of sheet	EN 426	cm/ml	200/20	200/20	200/30
<b>CLASSIFICATION</b>					
Standard / Product specification	EN 649	-	Heterogeneous vinyl flooring	Homogeneous vinyl flooring	Heterogeneous vinyl flooring
European classification	EN 685	Class	34 - 43	34 - 43	-
Fire rating	-	Class	C <sub>fl</sub> -s1	B <sub>fl</sub> -s1	Bs2d0
Slip resistance wet	EN 13 501-1	Class	A+B	A+B	-
<b>PERFORMANCE</b>					
Wear resistance	EN 660.1	mm	≤ 0.08	≤ 0.15	-
Wear group	EN 649	group	T	P	-
Dimensional stability	EN 434	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation	EN 433	mm	≤ 0.10	≤ 0.10	-
Thermal conductivity	EN 12 524	W/(m.K)	0.25	0.25	-
Colour fastness	EN 20 105-B02	-	≥ 6	≥ 6	≥ 6
Anti-bacterial and fungicidal	EN ISO 846	-	Sanosol®	Yes	Yes
Chemical resistance	EN 423	Class	Good	Good	Good

**ACCESSORIES** : SITAR drain, floor/wall diminishing strip, cove former, weldable PVC shower threshold, CA12 angle welding rods.

### INSTALLATION :

Installation should be carried out in accordance with local standards. Subfloor to be flat, smooth hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours prior to installation at a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

### MAINTENANCE :

No emulsion dressings or polish required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser.

Further installation and maintenance instructions are available from Gerflor.

AMERICA LATINA (BRASIL): Gerflor América Latina Pisos E Revest. Ltda  
 Tel.: (55) 11 30 55 2020 - Fax: (55) 11 30 55 2023  
 e-mail: gerfloramericalatina@gerflor.com

ASIA: Gerflor Asia  
 Tel.: (60) 3 7954 1131 - Fax: (60) 3 7954 1334  
 e-mail: gerflorasiasia@gerflor.com

AUSTRALIA/NEW ZEALAND - Gerflor Australasia Pty Ltd  
 Tel.: 1800 060 785  
 e-mail: gerflorpacific@gerflor.com

BENELUX/BELGIQUE/LUXEMBOURG: Gerflor Belgium  
 Tel.: (32) 03 766 42 82 - Fax: (32) 03 766 29 14  
 e-mail: gerflorbelgium@gerflor.com

CANADA: Gerflor International  
 Tel.: (1) 450 538 9828 - Fax: (1) 450 538 9827  
 e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor (China) Ltd  
 Tel.: (852) 2142 3728 - Fax: (852) 2834 4795  
 e-mail: gerflorchina@gerflor.com

DEUTSCHLAND: Gerflor Mipolam GmbH  
 Tel.: (49) 0 22 41-25 30 - 0  
 e-mail: GerflorMipolam@gerflor.com

Muster- und Kundenservice  
 Tel.: (49) 0 22 41-25 30 131 - Fax: (49) 0 22 41-25 30 100  
 e-mail: Kundenservice@gerflor.com

Service Anwendungstechnik:  
 Tel.: (49) 0 22 41-25 30 555 - Fax: (49) 0 22 41-25 30 550  
 e-mail: Technik@gerflor.com

ESPAÑA: Gerflor Iberia SA  
 Tel.: (34) 91 653 5011 - Fax: (34) 91 653 9525  
 e-mail: gerfloriberia@gerflor.com

PORTUGAL: Gerflor Iberia SA  
 Tel.: (351) 21 843 95 49 - Fax: (351) 21 846 55 44  
 e-mail: gerflorportugal@gerflor.com

FRANCE: Gerflor  
 Service Express :  
 Conseils techniques et échantillons  
 N°Azur 0 810 569 569

N°Azur FAX 0 810 569 570  
 e-mail : contractfrance@gerflor.com

Service commandes :  
 Tél. : 04 75 50 68 68 - Fax : 04 75 50 69 96

IRELAND: Gerflor Ltd  
 Tel.: (353) 042 966 1431 - Fax: (353) 042 966 1759  
 e-mail: gerflorir@gerflor.com

ITALIA: Gerflor S.p.A  
 Tel.: (39) 0290 786012 r.a. - Fax: (39) 0290 427484  
 e-mail: gerfloritalia@gerflor.com

MIDDLE EAST: Gerflor Middle East  
 Tel.: (966) 3 847 1779 - Fax: (966) 3 847 1781  
 e-mail: gerflorME@gerflor.com

NETHERLANDS: Gerflor BV  
 Tel.: (31) 40 266 1700 - Fax: (31) 40 257 4689  
 e-mail: gerflorNL@gerflor.com

ÖSTERREICH/SCHWEIZ: Gerflor GmbH  
 Tel.: (43) 07229/70800-0 - Fax: (43) 07229/70800-218  
 e-mail: austria@gerflor.com - switzerland@gerflor.com

POLSKA: Gerflor Polska Sp z o.o  
 Tel.: (48) 61 823 34 01 - Fax: (48) 61 823 34 33  
 e-mail: info@gerflor.pl

RUSSIA: Gerflor Moscow Office  
 Tel.: (7) 495 430 86 54 - Tel.: (7) 495 430 86 65  
 Fax: (7) 495 430 8546  
 e-mail: gerflorrus@mospk.east.ru

SCANDINAVIA: Boide Gerflor Scandinavia a.s.  
 Tel.: (47) 64 95 60 70 - Fax: (47) 64 95 60 80  
 e-mail: gerflorscand@gerflor.com

UNITED KINGDOM: Gerflor Ltd  
 Sample service Tel.: (44) (0)8702 647 581  
 Office Tel.: (44) (0)1926 401 500 - Fax: (44) (0)1926 401 647  
 e-mail: ContractUK@gerflor.com

USA: Architectural Floor Systems, Inc  
 Tel.: (1) 847 394 3944 - Toll free: 8 003 236 792  
 e-mail: info@gerflorusa.com

OTHER COUNTRIES: Gerflor International  
 Tél. : (33) 04 74 05 40 00 - Fax : (33) 04 74 05 03 13  
 e-mail : gerflorcontract@gerflor.com

## Education



## Retail

## Healthcare



## Housing

## Industry



CI SIB	(43)	Tn6
--------	------	-----

UK reference - September 2006