

TARALAY EMOTION™

gerflor.com
gerflor.asia



Gerflor[®]
theflooringgroup


TARALAY EMOTION™




PANAME - 0802 Light Grey



BORGO - 0607 Fumee

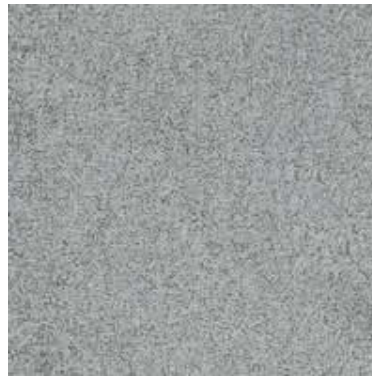


PANAME - 0804 Slate

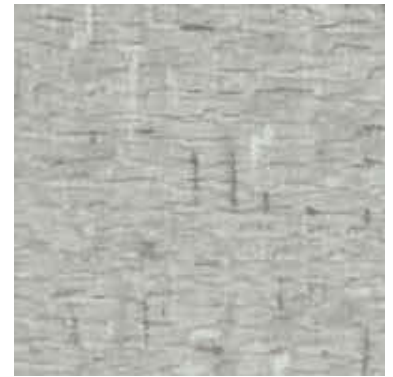

COUTURE - 0707 Natural



BORGO - 0606 Gris

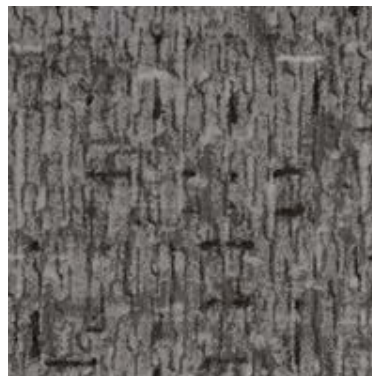

COUTURE - 0708 Dark



PANAME - 0806 Anthracite

THE
FRENCH
TOUCH



COUTURE - 0710 Beige



COUTURE - 0709 Cotton



PANAME - 0811 Calaité



PANAME - 0805 Brown



PANAME - 0809 Clay




COUTURE - 0712 Smoke

TARALAY EMOTION™




PANAME - 0810 Jade


THE
FRENCH
TOUCH

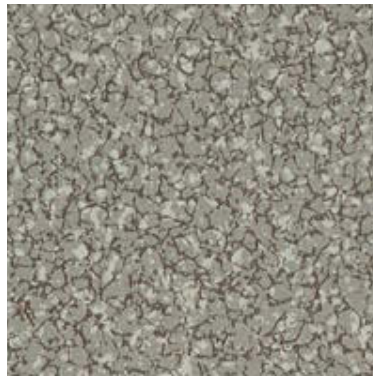

BORGO - 0611 Pearl

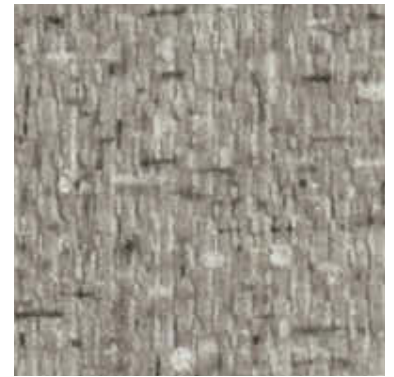

COUTURE - 0711 Capuccino

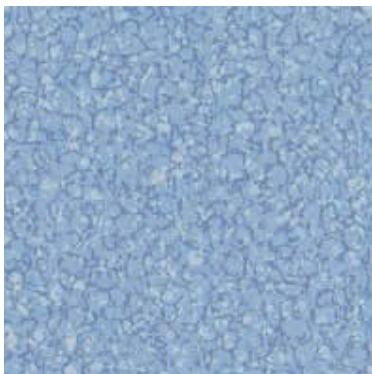

BORGO - 0601 Azur



COUTURE - 0713 Sky



COUTURE - 0714 Iris

EARTH / PASTELS




COUTURE - 0701 Ivory



BORGO - 0603 Sand



PANAME - 0801 Sable

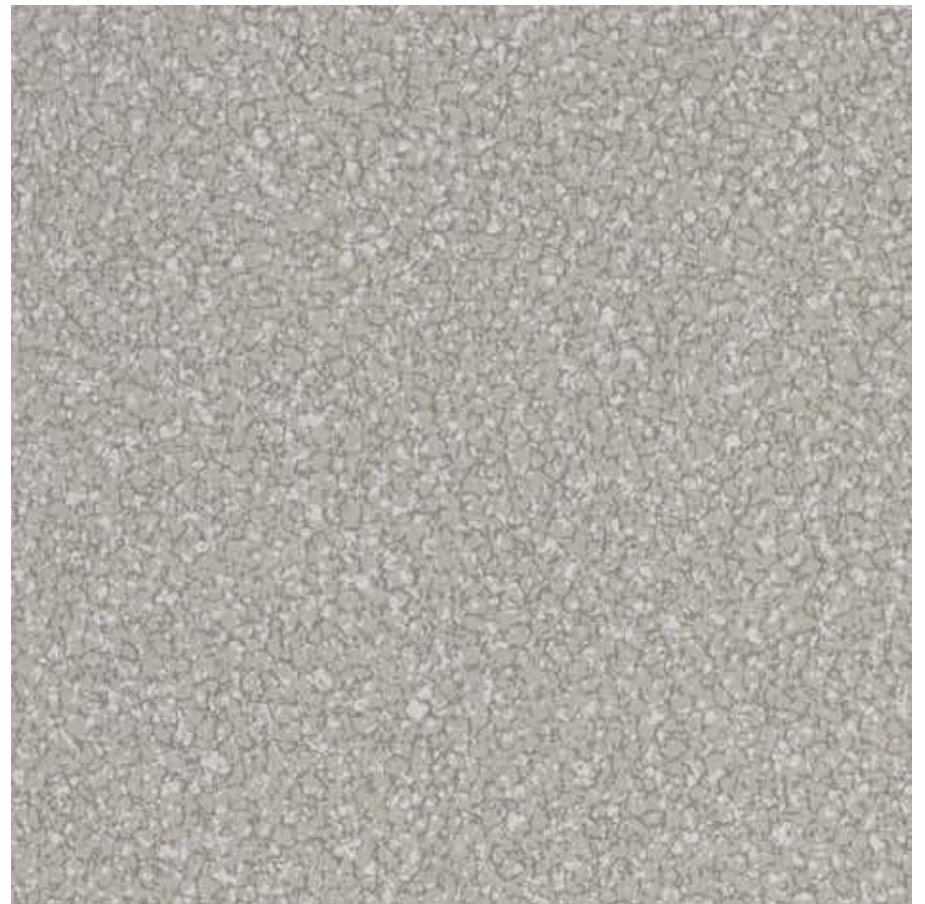

BORGO - 0608 Pastel



TARALAY EMOTION™



PANAME - 0808 Ocre




PANAME - 0807 Yellow



BORG0 - 0602 Sahara




COUTURE - 0715 Corn

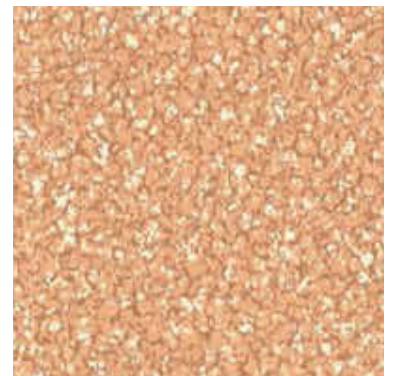


BORG0 - 0616 Beige

COLORFULL

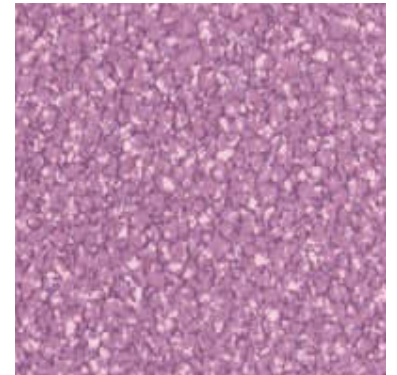

BORGO - 0619 Purple

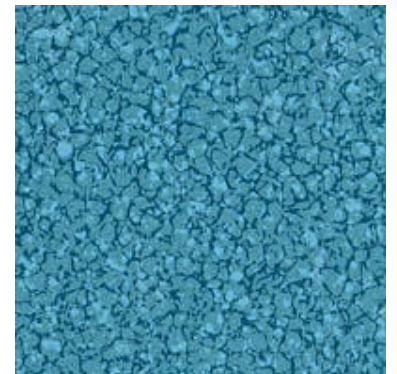

BORGO - 0612 Sapphire



BORGO - 0615 Verdure




THE
FRENCH
TOUCH



BORGO - 0618 Bloue



BORGO - 0620 Grass

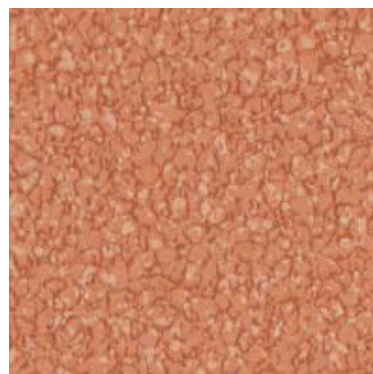

BORGO - 0614 Inulin



BORGO - 0617 Redish



TARALAY EMOTION™



FONTENAY - 0506 Exotic



FONTENAY - 0505 Brown




AMBOISE - 0902 Rustic



AMBOISE - 0903 Beige



AMBOISE - 0901 Black



ARCY - 1002 Taupe



WOODS



AMBOISE - 0904 White



FONTENAY - 0504 Cream




CHINON - 0402 Light



CHINON - 0403 Honey



FONTENAY - 0503 Honey



ARCY - 1003 Chamois







admissions
openhouse





NE

rire chanter danser et s'amuser
jouer avec les autres
avoir envie
CROIRE EN SOI
trouver l'amour
réussir un défi
PRENDRE DU PLAISIR
profiter de la vie

WOOD AMBOISE





WOOD CHINON




Protecsol®

Sanosol

34-43

BORGO / COUTURE / PANAME / WOOD

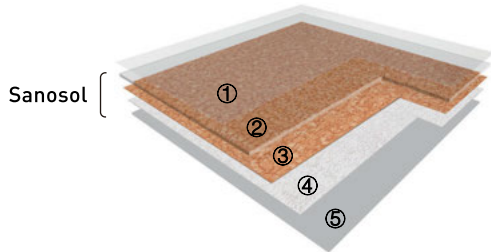

- ① Protecsol® surface treatment
- ② Transparent wear layer
- ③ Printed design
- ④ Fiber glass reinforced layer
- ⑤ Compact back layer

- Protecsol® surface treatment with excellent resistance to scratching, scuffing & easy cleaning.
- Transparent wear layer with printed designing, highest durability.
- Compact backing with fiber glass reinforced layer. High resistance to static and dynamic indentation under rolling loads, and excellent dimensional stability.
- Sanosol treated throughout the thickness to prevent bacterial and fungicidal contamination.
- No DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, friendly to health and environment.
- Recommended for high traffic area in education, office, retail, hospital and institutional buildings.



Compact sheet, without foam backing

FEWER VOC'S, BETTER INDOOR AIR QUALITY



COMPOSITION

- **100% REACH** compliant
- **FREE** of formaldehyde
- **FREE** of heavy metals
- **FREE** of solvent



LIFE CYCLE ANALYSIS

- **Eco-designed** according to a product specific Life Cycle Analysis
- **Product specific EPD** (Environmental Products Declaration) available
- **Manufactured in an ISO 14001 and ISO 50001** certified site
- **Contribution to many Green Building Schemes** (LEED, HQE, BREEAM...)
- **Exclusive surface treatments** to reduce drastically the use of chemical product and water and ensure the lowest environmental impact



RECYCLED CONTENT

- **100% REACH compliant** recycled content



RECYCLING

- **100% recyclable product**



INDOOR AIR QUALITY

- **TVOC emissions 10 times better than norms requirements** (TVOC < 100 µg/m³ after 28 days)
- **TVOC < 10ug/m³ after 28 days** for all products treated Evercare™ / Protecsol®2
- **Floorscore certified**
- **M1 certified**
- **Comply with AgBB protocol**
- **No formaldehyde emission**



WELLNESS

- **Health:** Antibacterial activity (inhibits growth > 99%)
- **Safety:** Anti slip performance
- **Comfort:** Walking comfort and impact noise reduction

TARALAY EMOTION™



TARALAY EMOTION™ BORGIO / COUTURE / PANAME / WOOD is a multilayered compact vinyl floor covering, available in 2m width sheet, with a group T wear rating. The product comprises a printed design protected by a transparent wear layer, and a compact backing with fiber glass reinforced layer, which resists static and dynamic perforation under rolling loads and provides excellent dimensional stability.

TARALAY EMOTION™ BORGIO / COUTURE / PANAME / WOOD is treated with Protecsol® surface treatment with excellent resistance to scratching, scuffing & easy cleaning, no wax for life, and Sanosol treated throughout the thickness to prevent bacterial and fungicidal contamination. It has no DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, which is friendly to health and environment, recommended for high traffic area in education, office, retail, hospital and institutional buildings.

TARALAY EMOTION™ BORGIO / COUTURE / PANAME / WOOD

DESCRIPTION

Total thickness	ISO 24346 (EN 428)	mm	2.0	2.6
Thickness of wearlayer	ISO 24340 (EN 429)	mm	0.7	0.7
Weight	ISO 23997 (EN 430)	g/m ²	2800	3800
Width / Length of sheet	ISO 24341 (EN 426)	cm / lm	200 / 20	200 / 15

CLASSIFICATION

Norm / Product specification	-	-	ISO 10582 (EN 649)	ISO 10582 (EN 649)
European classification	ISO 10874 (EN 685)	class	34 - 43	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	KV	<2	<2
Slip resistance wet	DIN 51130	class	R9	R9

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤2.0	≤2.0
Wear group	EN 649	group	T	T
Type binder content	ISO 10582	type	I	I
Dimensional stability	ISO 23999 (EN 434)	%	≤ 0.4	≤ 0.4
Residual indentation	ISO 24343-1 (EN 433)	mm	≈0.1	≈0.1
Castor chair test	ISO 4918 (EN 425)	-	OK	OK
Thermal conductivity	ISO 10456 (EN 12524)	W/(m.K)	≈0.25	≈0.25
Colour fastness	ISO 105 - B02	degree	≥ 6	≥ 6
Chemical products resistance	ISO 26987 (EN 423)	-	OK	OK
Anti-bacterial and fungicidal treatment	-	-	Sanosol	Sanosol
Surface treatment	-	-	Protecsol®	Protecsol®
Anti-bacterial activity (E.coli - S.aureus - MRSA) (1)	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000 - 6	µg/m ³	< 100	< 100
Certification	-	-	Floorscore®	Floorscore®

CE MARKING

CE	EN 14041	-	

(1) The implementation of an effective cleaning regime is the most important defence against infections.

TARALAY EMOTION™, LESS SPEAKING FOR MORE ACTIONS

<p>COMPOSITION 100% REACH compliant FREE of formaldehyde FREE of heavy metals FREE of solvent</p>	<p>RECYCLED CONTENT 100% REACH compliant recycled content</p>	<p>RECYCLABILITY 100% recyclable product</p>	<p>INDOOR AIR QUALITY TVOC emissions between 10 and 100 times better than norms requirements Floorscore certified No formaldehyde emission</p>	<p>WELLNESS Health: Antibacterial activity (inhibits growth > 99%)</p>
--	--	---	---	--

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

MAINTENANCE

No acrylic emulsion (wax) is needed for life. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

ASIA: Gerflor Asia
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd
Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119
e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH
Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbe@gerflor.com

CANADA: Gerflor International
Tel: +1 438 333 0752 - Fax: +1 438 380 5425
e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd.
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com

FINLAND: Gerflor Oy
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi

FRANCE: Gerflor - Service Express:
 
e-mail: contactfrance@gerflor.com

GERMANY: Gerflor Mipolam GmbH
Tel: +49 (0)22 41-25 30-0
e-mail: gerflormipolam@gerflor.com
Kunden-Service
Tel: +49 (0) 22 41-25 30-136 - Fax: +49 (0) 22 41-25 30-100
e-mail: kundenservice@gerflor.com
SAT Service und Anwendungstechnik
tel: +49 (0)22 41-25 30 555 - Fax: +49 (0)22 41-25 30 550
e-mail: technik@gerflor.com

IRELAND: Gerflor Ltd
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759
e-mail: gerflorir@gerflor.com

ITALY: Gerflor S.p.A.
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina
Tel: +55 11 38 48 20 20
e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East
Tel: +966 13 847 1779 - Fax: +966 13 847 1781
e-mail: info@gerflorme.com

NETHERLANDS: Gerflor Benelux
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflornl@gerflor.com

OTHER COUNTRIES: Gerflor International
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33
e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao
Tel./Fax: + 7 495 785 23 71
e-mail: gerflorrussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s.
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80
e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd
Sample service: Contractuk@gerflor.com
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

USA: Gerflor North America
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com

gerflor.com
gerflor.asia

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

MAR 2019-03-15 Version- Indicative documentation cost USD 10.4
Gerflor® has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.

Gerflor. Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings & Profiles

and Be CONNECTED!



www.gerflor.com



Committed to sustainable development

Gerflor®
theflooringgroup