MIPOLAM® AMBIANCE ULTRA™

gerflor.com
gerflor.asia

CLASSIC & TRENDY

NEW

Gerflor®
theflooringgroup

evercare™ SURFACE TREATMENT

EXCLUSIVE PATENTED TECHNOLOGY BY GERFLOR®

THE BEST CHEMICAL STAIN RESISTANCE SURFACE TREATMENT

evercare™ BY GERFLOR : Treatment durability



Gerflor®:
Even thickness

100% non-porous surface
Water-repellent effect

Other treated floor covering



Competitor:
Missing treatment and uneven thickness



Non-treated product



100% HYGIENIC

No contamination & bacteria development

EASY AND COST EFFECTIVE MAINTENANCE

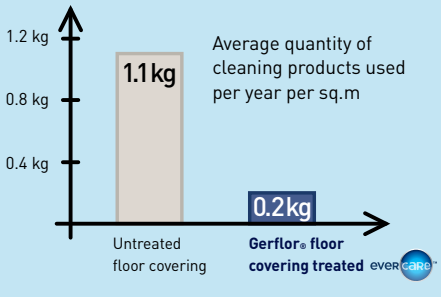

80% less water and detergent use for cleaning

USER'S BENEFITS

- **Easy & cost-effective maintenance**
- **No wax for life**
- **Stain barrier**
- **Chemical resistance**

COMPLEMENTARY RANGES

WALL SOLUTIONS

1. **100% SAFETY**
   LINEA'TOUCH handrail
2. **100% PROTECTION**
   Mural Plus or wall protection DECOCHOC combined with LINEA'punch bumper
3. **100% WATERPROOF**
   Perfect hot-welded joint between floor and wall to reduce bacterial activity
4. **100% HYGIENIC**
   - Skirting and coving solutions: no areas where particles or bacteria can stagnate
   - Easy to clean

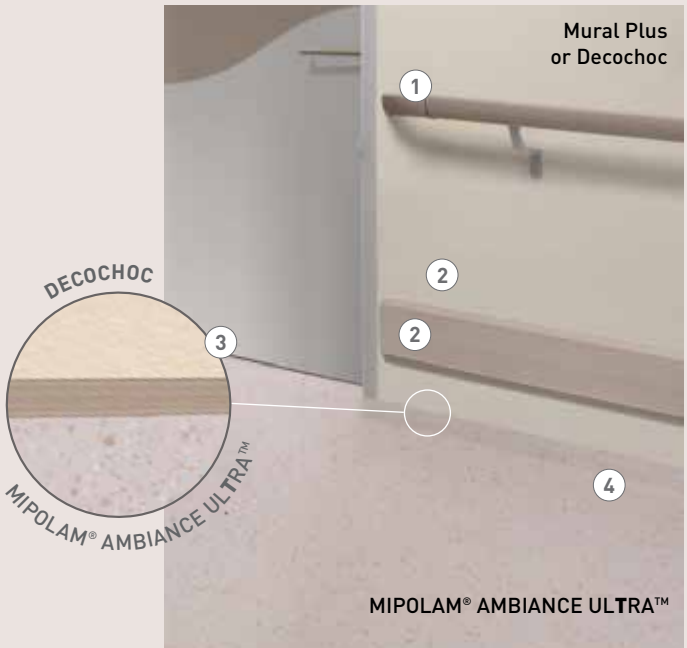

MIPOLAM® AMBIANCE ULTRA™ **Classic**

- Timeless design
- Our best seller
- High value for money
- Top chemical and stain resistance on the market

FEWER VOC'S, **BETTER INDOOR AIR QUALITY**

INDOOR AIR QUALITY

- TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m^3 after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission

RECYCLABILITY

- 100 % recyclable product

LCA

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an Iso 14001 and Iso 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)
- Patented surface treatment Evercare™ to reduce drastically the use of chemical products and water and ensure the lowest environmental impact

COMPOSITION

100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent

RECYCLED CONTENT

- 100 % REACH compliant recycled content

WELLNESS

Health

- Antibacterial activity (inhibits growth > 99 %)

Comfort

- Walking comfort < 75 dB

MIPOLAM® AMBIANCE ULTRA™ Trendy

NEW

- Soft and low contrast design
- Trendy design
- Fresh colors
- The perfect choice for architects

MIPOLAM® AMBIANCE ULTRA™

Classic

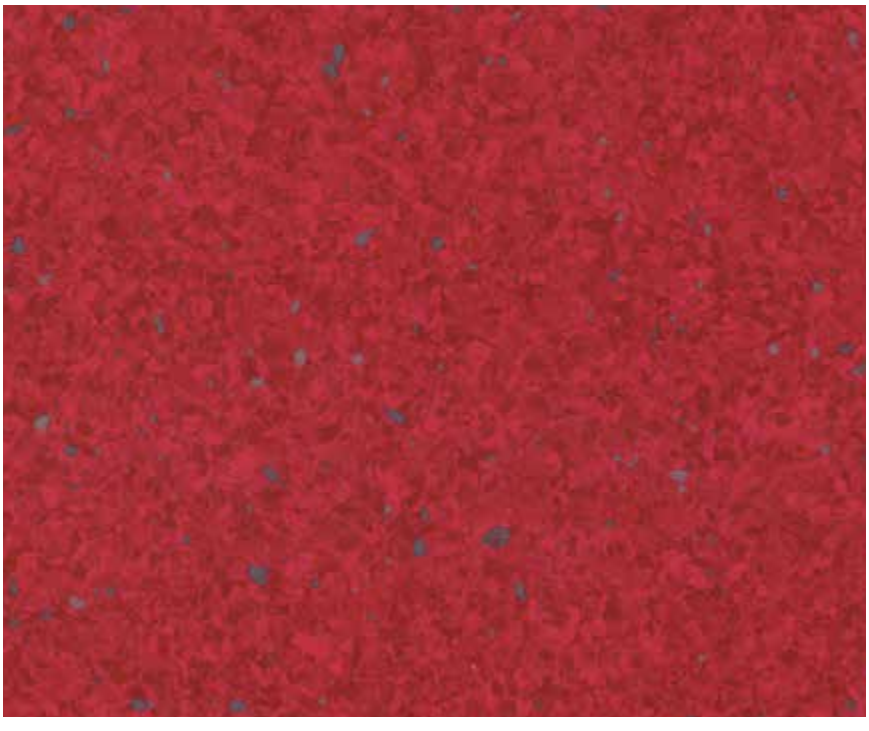

2071 Imperial Red

2078 Corn

2073 Vanilla

2072 Terracotta

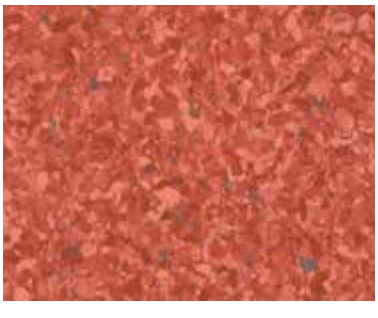

2074 Pumkin

2079 Capuccino

2080 Expresso

2059 Camel

2060 Sahara

Classic

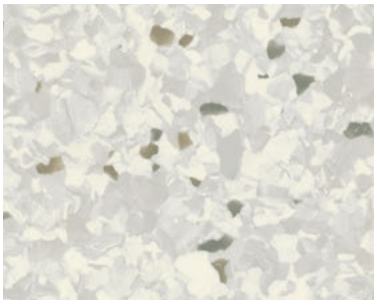

2055 Opale

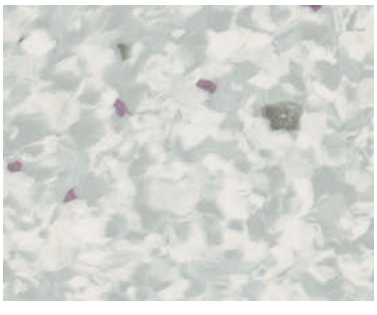

2054 Cloud

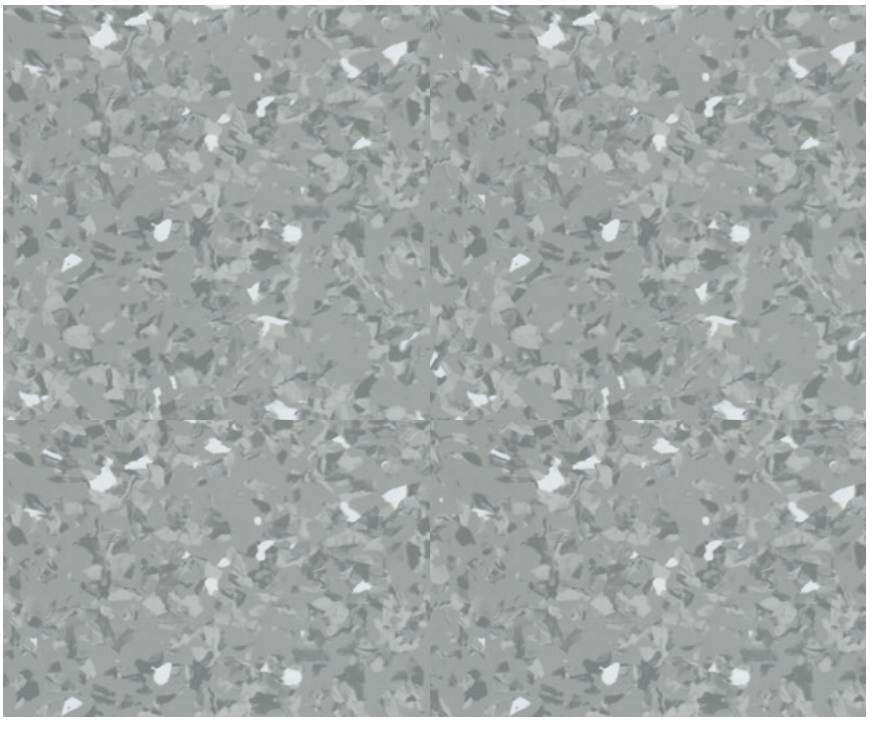

2053 Mouse

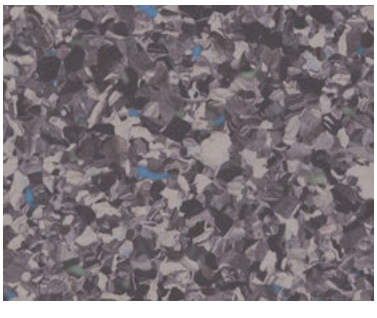

2056 Deer

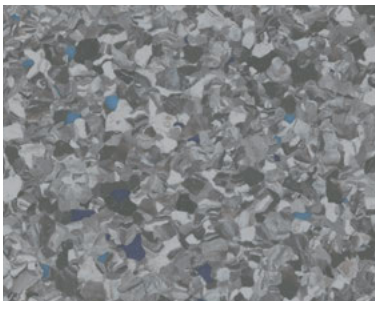

2051 Charcoal

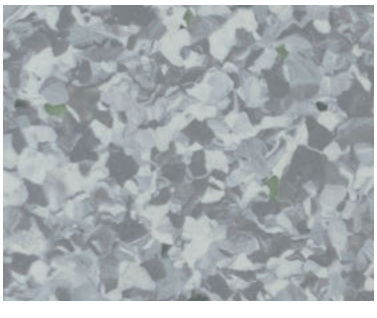

2052 Ash

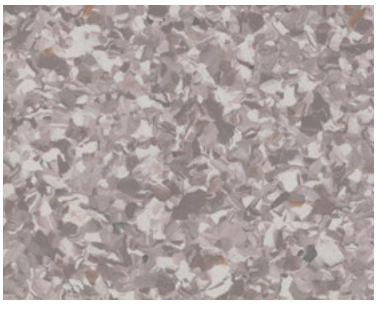

2057 Coffee

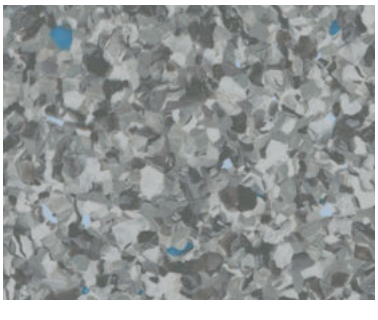

2076 Storm

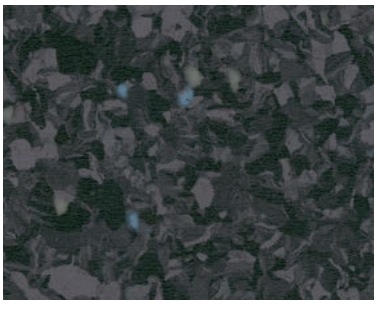

2050 Midnight

Classic

2062 Beach

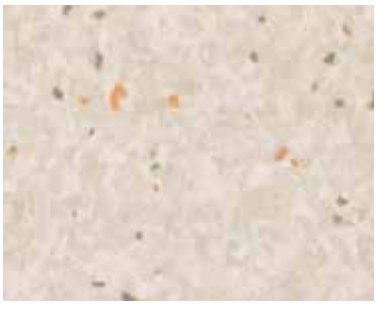

2084 Cream

2061 Sand

2077 Latte

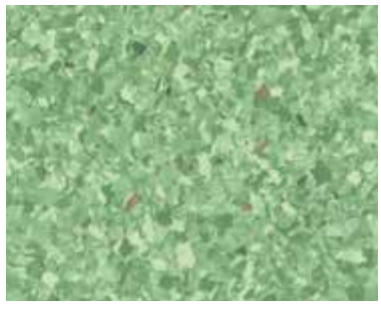

2065 Bamboo

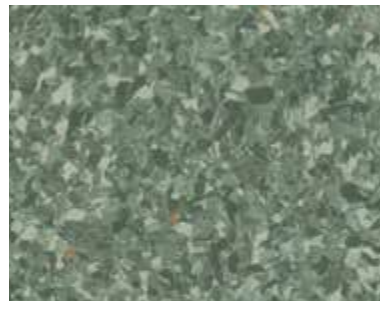

2064 Hunting

2058 Fog

2063 Emerald

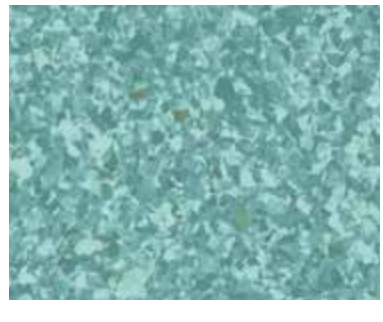

2066 Forest

Classic

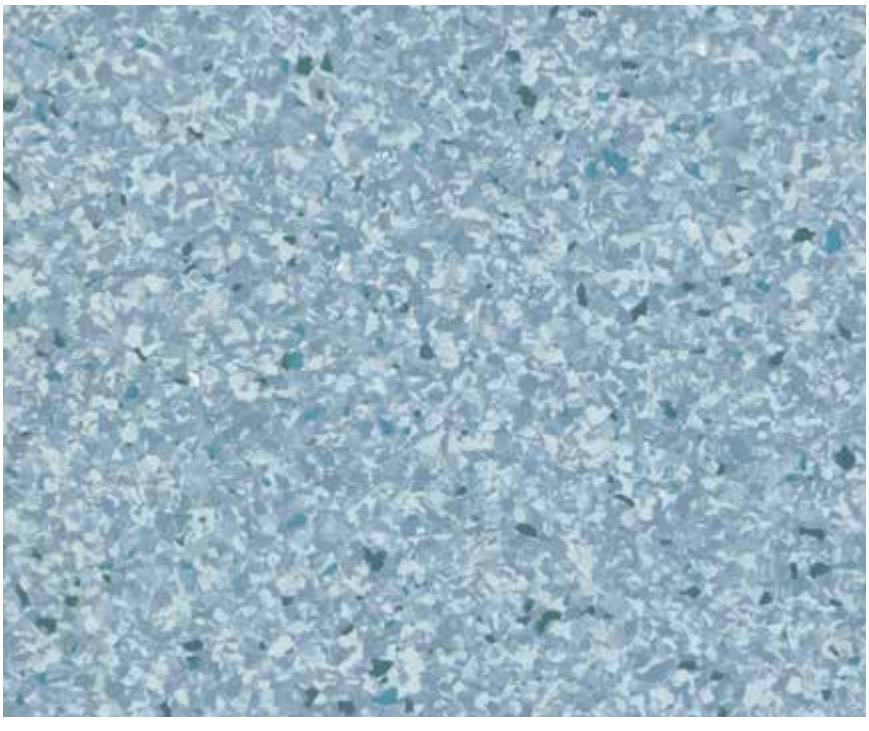

2070 Ink Blue

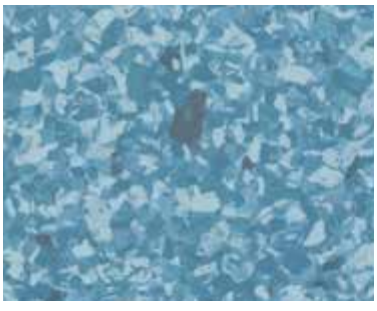

2069 Sky

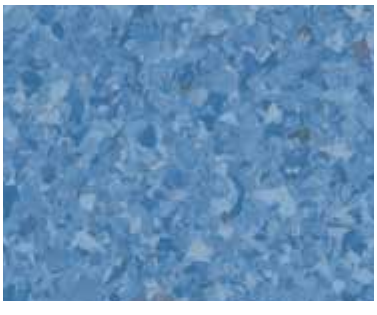

2081 Cobalt

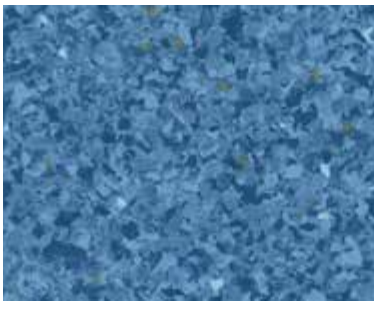

2067 Pool

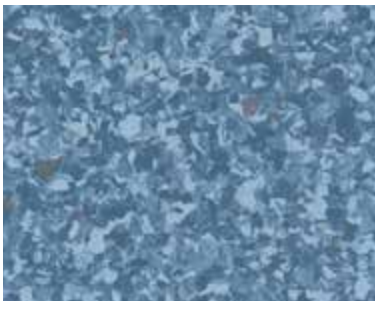

2068 Sea Blue

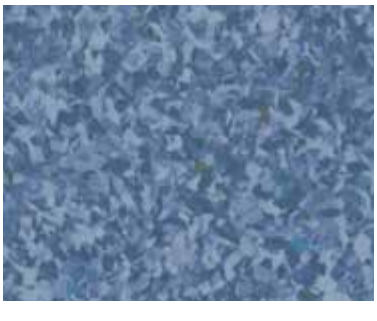

2082 Ocean

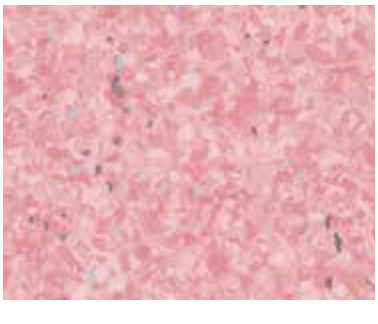

2083 Candy

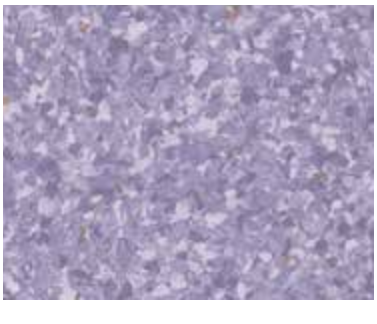

2075 Lavander

Trendy NEW

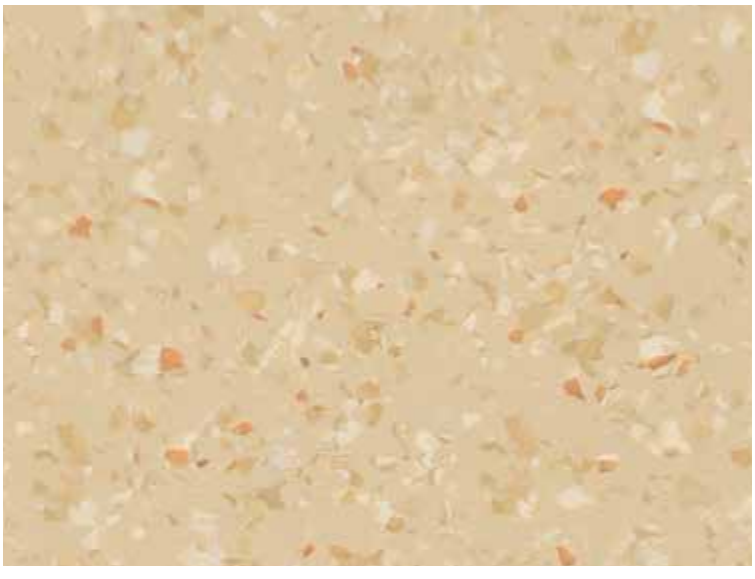

0048 Wheat

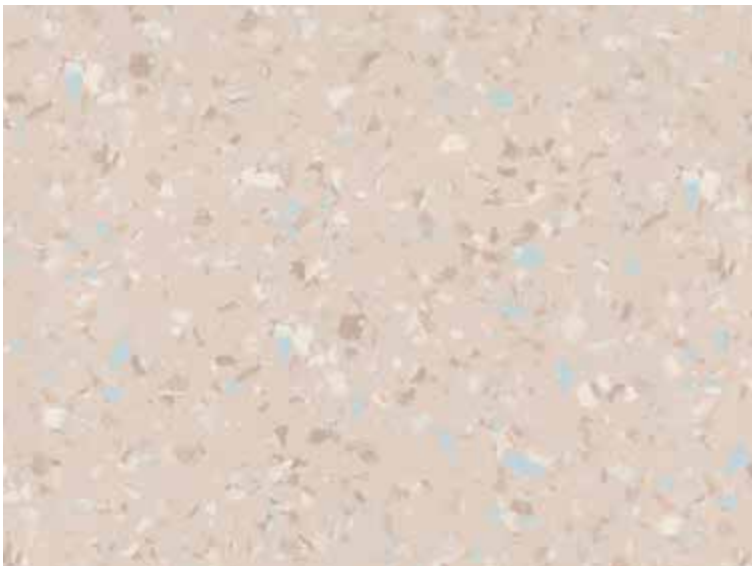

0043 Sandy Beige

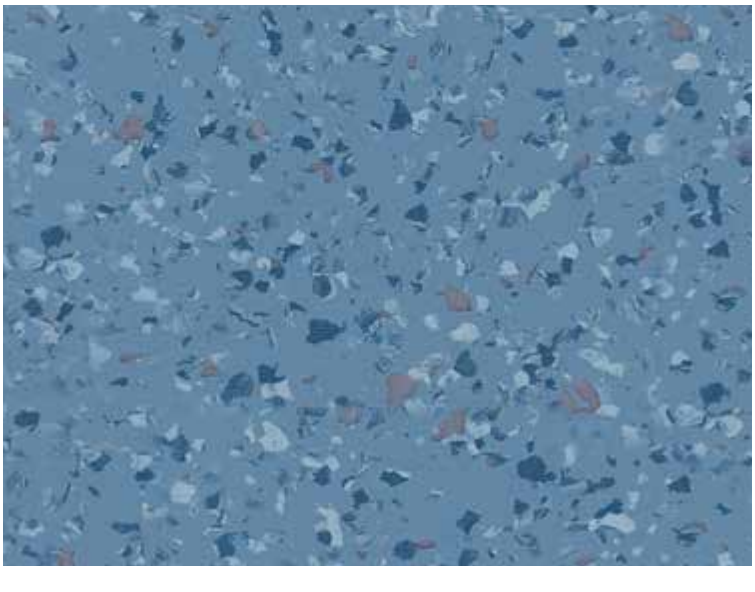

0044 Slate Blue

Trendy NEW

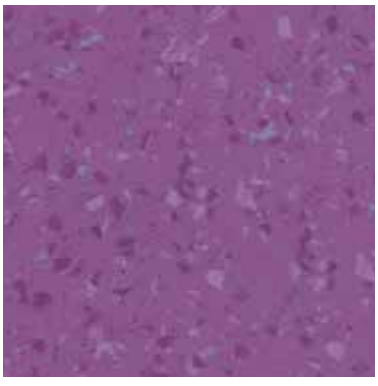

0046 Violet

0051 Orange

0052 Primrose

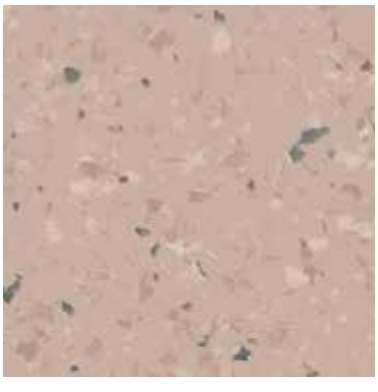

0056 Apricot

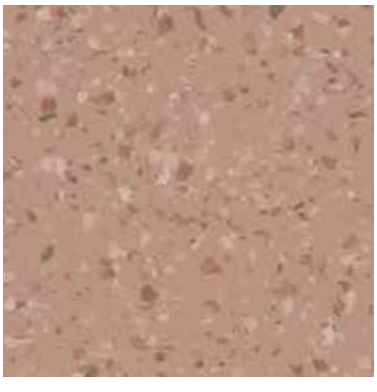

0049 Milky Coffee

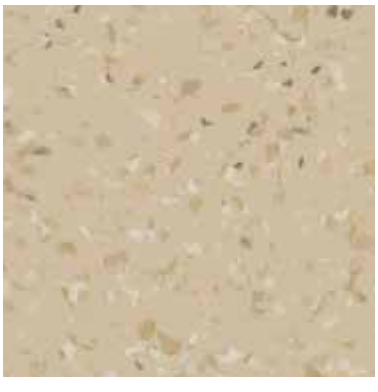

0057 Honey

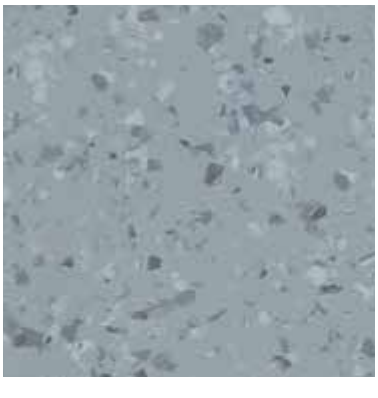

0053 Misty Grey

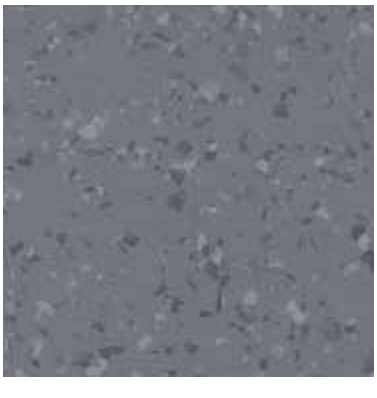

0055 Steel Grey

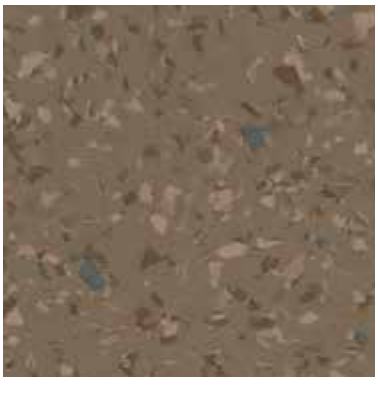

0054 Sienna

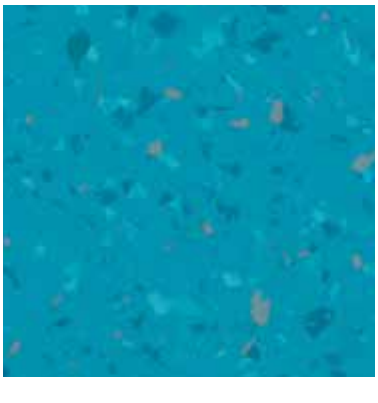

0050 Royal Blue

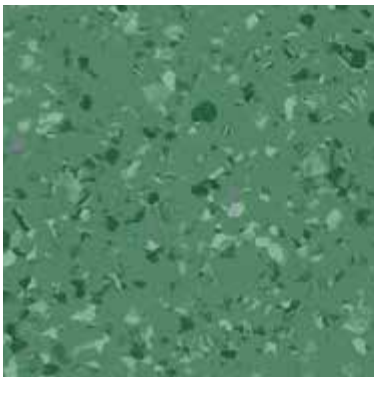

0047 Emerald Green

0045 Turquoise

MIPOLAM® AMBIANCE ULTRA™

Mipolam® Ambiance Ultra™ is a homogeneous pressed compacted floorcovering in sheet, with non-directional design, colour dyed as a raw mixture to ensure even color throughout the thickness and a matt finish. Its surface is densely compacted for improved wear and ease of maintenance.
It is treated with Evercare™, the latest improvement in polyurethane special maintenance treatment obtained by UV laser crossing-linking. Evercare™ avoids staining of chemical products, like betadine, eosin, or anti-bacterial hand gel and increases the durability of the flooring. No wax for life!

Mipolam® Ambiance Ultra™ incorporates bacteriostatic and fungistatic actions. The flooring complies with the EN 649 (34-43) and has a Group T wear rating. It is suitable for very heavy traffic areas.

Mipolam® Ambiance Ultra™ is available in a wide pallet of 50 classic and trendy colors.

			MIPOLAM® AMBIANCE ULTRA™
DESCRIPTION			
Total thickness	ISO 24346 (EN 428)	mm	2
Weight	ISO 23997 (EN 430)	g/m²	2750
Width of sheet	ISO 24341 (EN 426)	cm	200
Length of sheet	ISO 24341 (EN 426)	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	ISO 10581(EN 649)
European classification	ISO 10874 (EN 685)	class	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	KV	< 2
Electrical resistance	EN 1081	Ω	10^9-10^{10}
Slip resistance dry	EN 13893	-	⩾ 0.3
Slip resistance wet	DIN 51130	class	R9
PERFORMANCES			
Wear resistance	EN 660.2	mm³	⩽ 2.0
Wear group	EN 649	group	T
Type binder content	ISO 10581	type	I
Dimensional stability	ISO 23999 (EN 434)	%	⩽ 0.4
Residual indentation	ISO 24343-1 (EN 433)	mm	≈ 0.03
Castor chair test	ISO 4918 (EN 425)	-	OK
Thermal conductivity	ISO 10456 (EN 12524)	W/(m.K)	≈ 0.25
Colour fastness	ISO 105 - B02	degree	⩾ 6
Chemical products resistance	ISO 26987 (EN 423)	-	OK
Anti-bacterial and fungicidal treatment	-	-	OK
Surface treatment	-	-	Evercare™
Anti-bacterial activity (E. coli - S. aureus - MRSA)[1]	ISO 22196		>99 % Inhibits growth
Color number	-	-	50
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m³	< 10
Certification	-	-	Floorscore™
CE MARKING			
CE	EN 14041	-	

(1) The implementation of an effective cleaning regime is the most important defence against infections.

MAR 2018-03-15 Version - Indicative documentation cost USD 6.6
Gerflor® has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.

Gerflor **Don't forget our complementary ranges!**

MIPOLAM® AMBIANCE ULTRA™, **LESS SPEAKING FOR MORE ACTIONS**

Be connected!

#Gerflor

www.gerflor.com

Gerflor® thefloorgroup
GERFLOR ASIA Tel.: + 86-21-63578818