

# TARALAY PREMIUM

gerflor.com



**Gerflor**<sup>®</sup>  
theflooringgroup

# TARALAY PREMIUM

## THE SOLUTION FOR EXTREME TRAFFIC AREAS


Healthcare



Education



Administration & Business offices

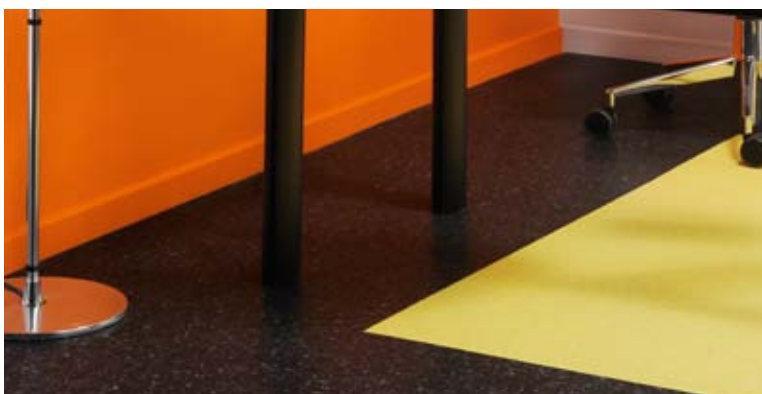

Retail



The images of floorcoverings in this catalogue have been reproduced as faithfully as printing technology permits.

# FORUM COMPACT




WR : 2160

4328 Yanko



WR : 2160

4324 Kamelik



WR : 2331

3714 Smoky



WR : 0147

4511 Salado



WR : 0093

3701 Isar




WR : 0122

8052 Congo



WR : 0584

4468 Yaqui



WR : 0261

4131 Godavari



WR : 2331

3710 Petchora



WR : 2442

8055 Nil



WR : 2454

4467 Alfios




WR : 2418

4512 Tapajos



WR : 0261

3722 Ucayali



WR : 2261

8056 Cubango



WR : 0305

8249 Salouen



WR : 2313

4132 Darling




WR : 0611

8833 Garonne




WR : 0092

4111 Yarkana



WR : 2548

4107 Tage



WR : 0076

3717 Limpopo

WR: Welding rod - reference code 0585 + [WR] code



# METALLICA COMPACT


	<b>6dB</b>	<b>Protcsol®</b>	<b>Sanosol®</b>	 <b>100% recyclable</b>
---	------------	------------------	-----------------	--

		WR : 0173		WR : 0318		WR : 0613	
	9753 Energy		9326 Starlight		9330 Moon		
	WR : 2248		WR : 2250		WR : 0468		WR : 2245
9206 Apollo		9510 Gamma		9505 Equinox		9002 Pulsar	
	WR : 2246		WR : 0608		WR : 0610		WR : 2247
9102 Orbit		9318 Comet		9127 Meteorite		9105 Supernova	
	WR : 2249		WR : 0607		WR : 0254		WR : 0611
9415 Celeste		9460 Spectre		9745 Cosmic		9719 Eclipse	

WR: Welding rod - reference code 0585 + (WR) code

# FUSION COMPACT

 Compact	<b>6dB</b>	<b>Protocols®</b>	<b>Sanosol®</b>	 100% recyclable
---	------------	-------------------	-----------------	---



WR : 2418

4507 Soufriere



WR : 2253

4741 Lanzarote



WR : 2266

8239 Mawensi



WR : 2541

4510 Gabrok



WR : 2258

8022 Merapi



WR : 2251

4753 Cotopaxi




WR : 2544

4462 Licancabur



WR : 2425

8237 Vulcano



WR : 0301

8011 Pinatubo



WR : 2227

4749 Vesuvio




WR : 2176

4464 Ruapehu




WR : 2542

4129 Kilauea



WR : 2471

8240 Teide



WR : 0120

4745 Lopevi



WR : 2545

4466 Kerid




WR : 2543

4110 Etna




WR : 0445

8049 Agung



WR : 2252

4748 Kamchatka



WR : 2243


8279 Ardouhoba

WR: Welding rod - reference code 0585 + (WR) code



# BRAZILIA COMPACT

 **6dB** **Protcsol®** **Sanosol®**  **100% recyclable**



WR : 2536

4514 Santarem



WR : 2242

8577 Amazonas



WR : 2538

4516 Careiro

WR: Welding rod - reference code 0585 + (WR) code

# BRAZILIA COMPACT

 Compact	<b>6dB</b>	<b>Protocols®</b>	<b>Sanosol®</b>	 100% recyclable
---	------------	-------------------	-----------------	---



WR : 0153

8386 Boa Vista



WR : 2182

4729 Mato Grosso



WR : 2537

8266 Gramado



WR : 0304

8736 Recife




WR : 2532

4327 Caxias




WR : 2389

8269 Ipanema




WR : 2259

4477 Maceio




WR : 3002

3715 Picos



WR : 2258

4329 Bacabal




WR : 2240

8157 Goias




WR : 2374

4478 Copacabana



WR : 2531

3709 Ceara



WR : 2535

8063 Londrina



WR : 2539

4136 Sao Luis




WR : 2540

4481 Estancia




WR : 0063

3707 Paraiba



WR : 2245

8062 Campinas



WR : 2534

4139 Paranaqua

WR: Welding rod - reference code 0585 + (WR) code

# COSTA RICA COMPACT

 **6dB** **Protcsol®** **Sanosol®**  **100% recyclable**




WR : 2266

8395 Caballo



WR : 0603

4743 Nublo



WR : 2269

8587 Tortuga




WR : 0082

8230 Arenal




WR : 2265

8387 Balsa



WR : 2234

8590 Quetzal




WR : 0234

8167 Papagayo




WR : 0026

4794 Talamanca



WR : 2270

4454 Ara




WR : 2267

8183 Volcan




WR : 0337

4752 Sombra




WR : 2271

4456 Marina




WR : 2268

8027 Cacao



WR : 2257

8191 Meseta




WR : 2272

4746 Jaguar

WR: Welding rod - reference code 0585 + (WR) code



# COSTA RICA COMPACT

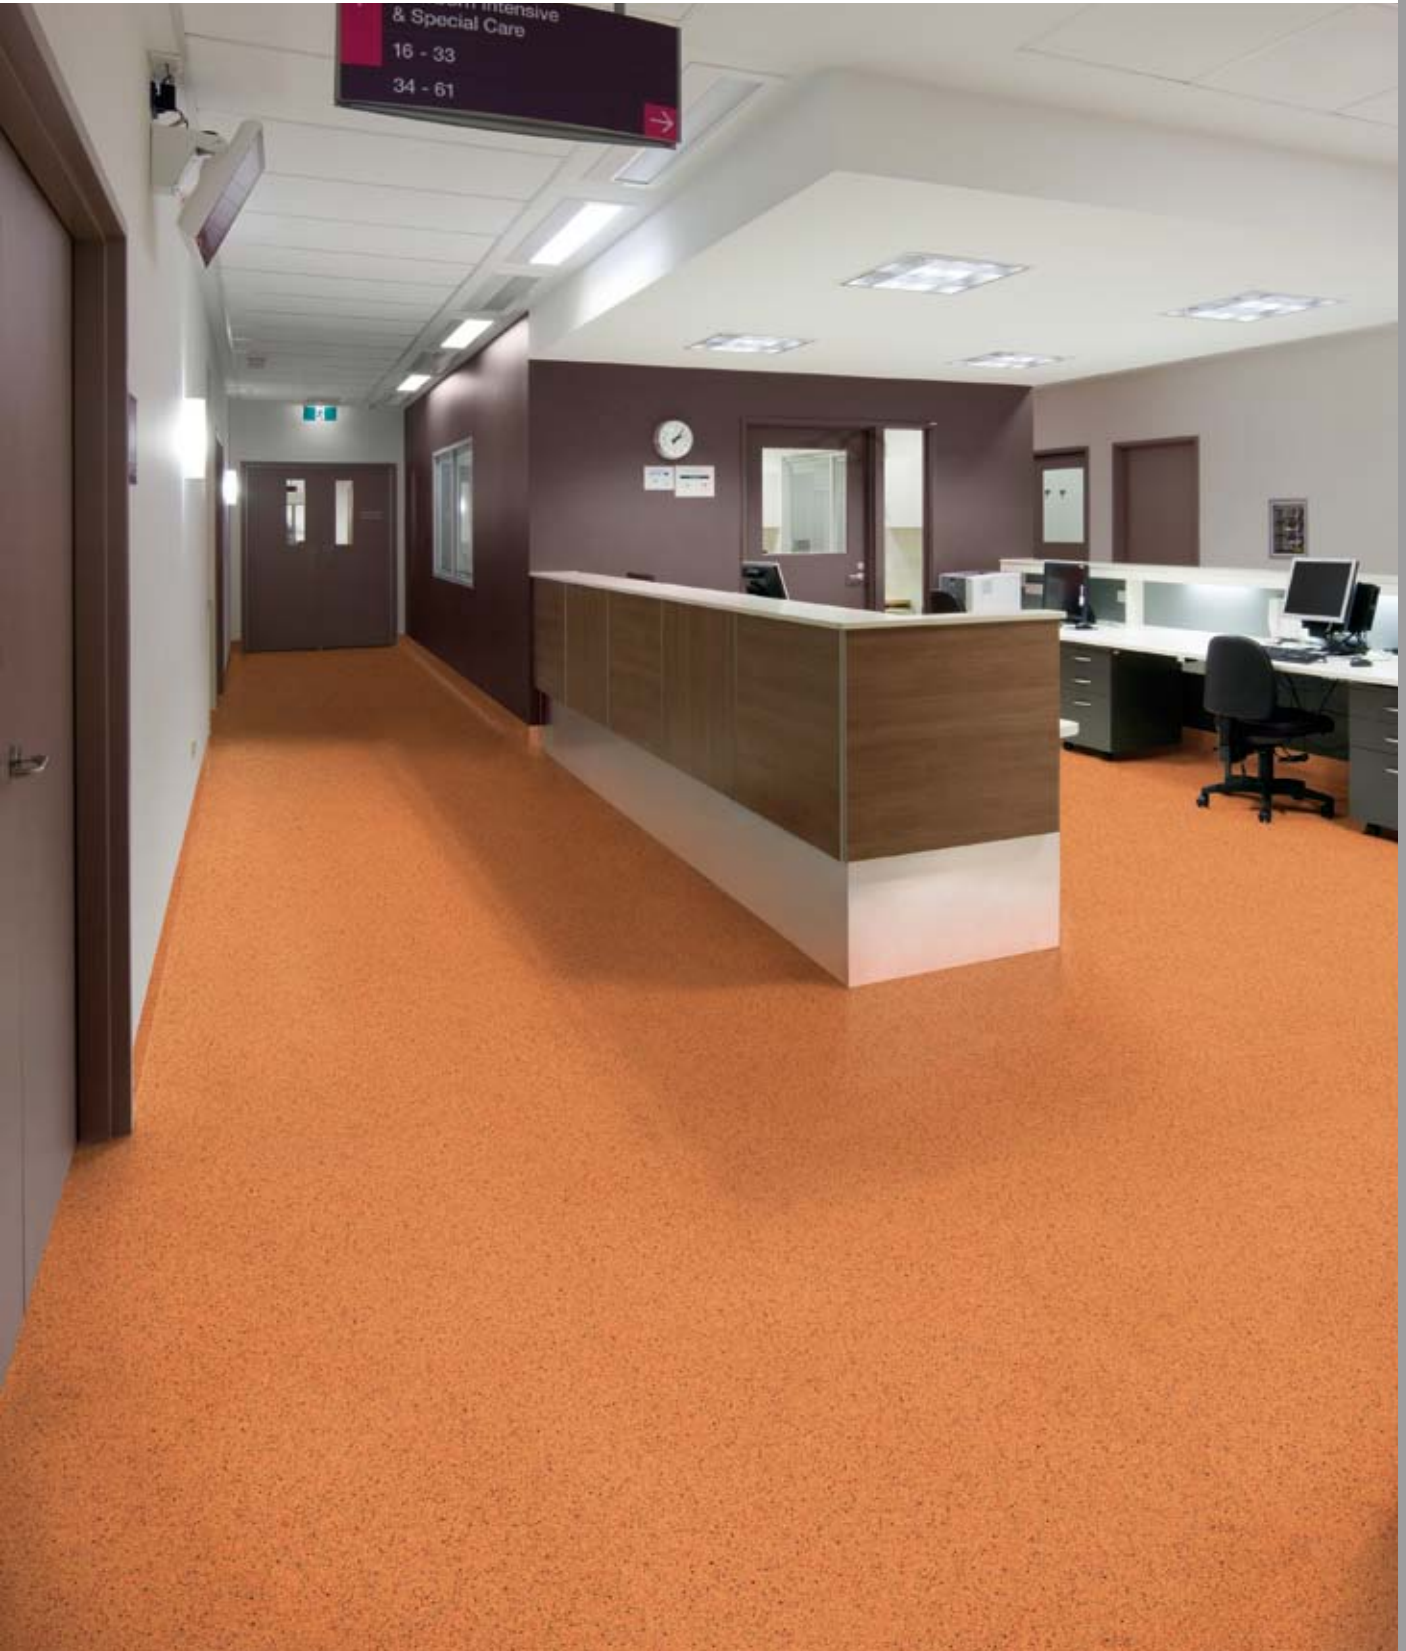

# INDIANA COMPACT


**6dB**
**Protcsol®**
**Sanosol®**

**100% recyclable**




WR : 2160

4001 Ofu




WR : 2161

4009 Tufoa



WR : 2166

4015 Guinéa




WR : 2166

8242 Masirah




WR : 0577

4002 Manua




WR : 2174

4029 Baduna



WR : 2525

4520 Musala




WR : 2159

4030 Vanuatu




WR : 0586

4003 Tao




WR : 0007

4140 Mahe




WR : 2297

4513 Padang




WR : 2528

8265 Nilandu




WR : 2172

4004 Pago




WR : 2523

4135 Aldabra




WR : 2282

8059 Nicobar




WR : 2422

8262 Rodrigues



WR : 0931

4133 Agalega



WR : 2318

4145 Madura



WR : 2527

8057 Socotra




WR : 0928

4146 Moheli

WR: Welding rod - reference code 0585 + (WR) code


# INDIANA COMPACT

 Compact	<b>6dB</b>	<b>Protocols®</b>	<b>Sanosol®</b>	 100% recyclable
---	------------	-------------------	-----------------	---




WR : 0089

8270 Lanta




WR : 2521

4475 Felidu




WR : 2522

4142 Penang



WR : 2529

4473 Mentawai



WR : 2460

4141 Zanzibar




WR : 2271

4476 Wattaru




WR : 2526

4469 Pemba




WR : 2177

4480 Bangkaru



WR : 2530

3705 Sumbawa



WR : 2524

8053 Anambas


WR: Welding rod - reference code 0585 + (WR) code




# TARALAY PREMIUM COMPACT

## THE COMPACT RANGE ALL IN COLOUR

A wide palette of **120 colours** to bring vitality, freshness

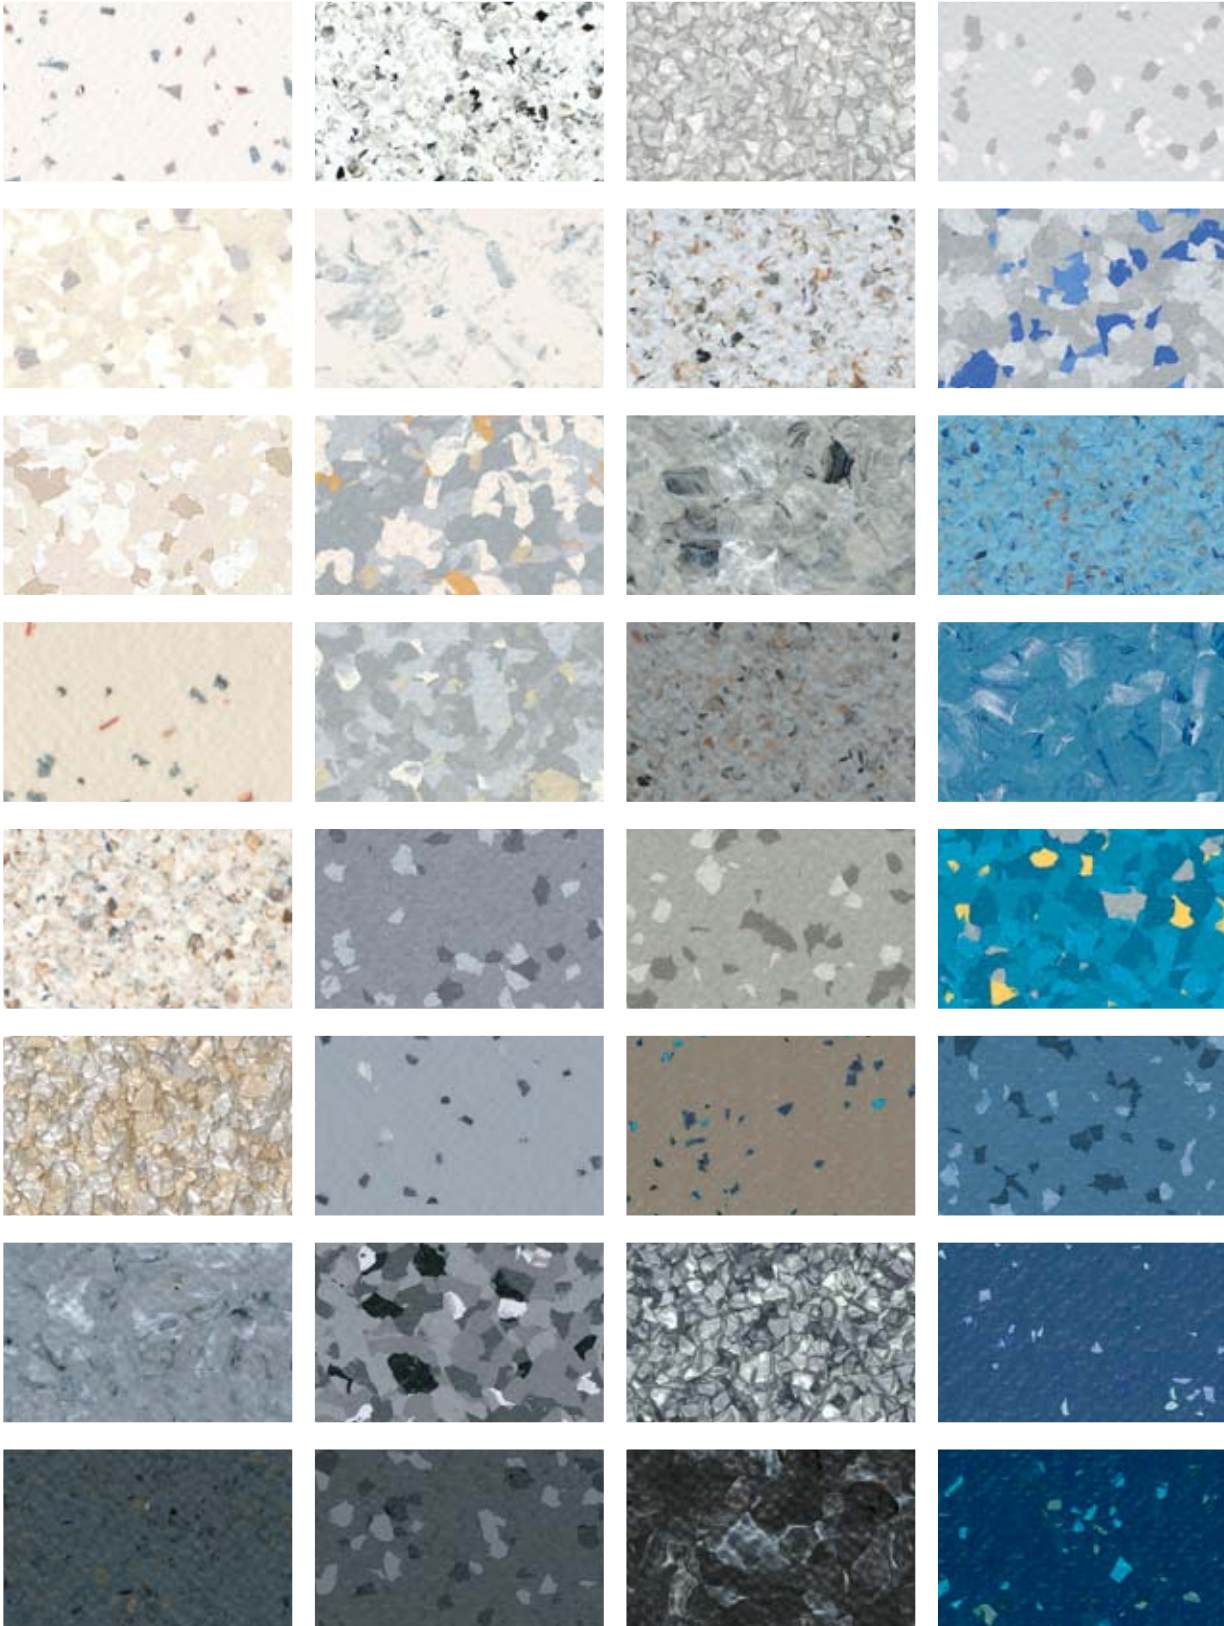

or softness to your decoration project.

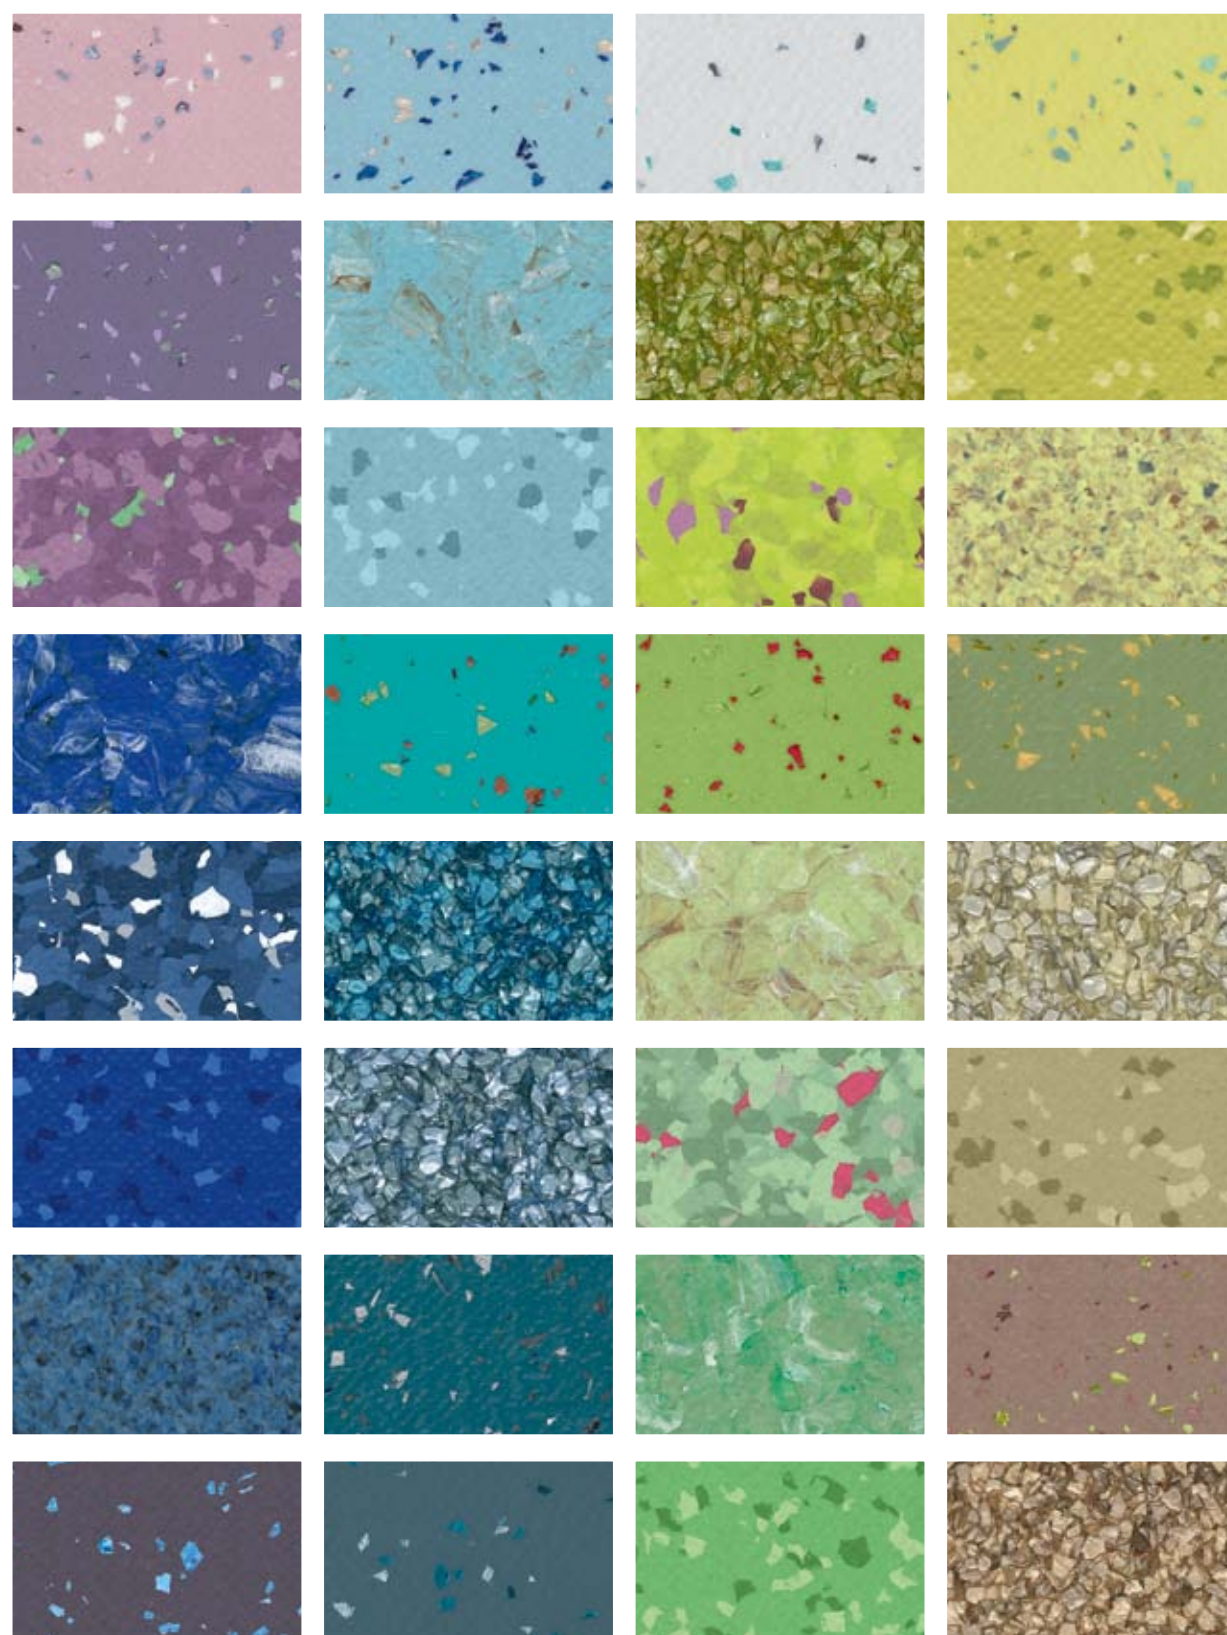




# TARALAY PREMIUM COMPACT


## THE COMPACT RANGE ALL IN COLOUR

A wide palette of **120 colours** to bring vitality, freshness

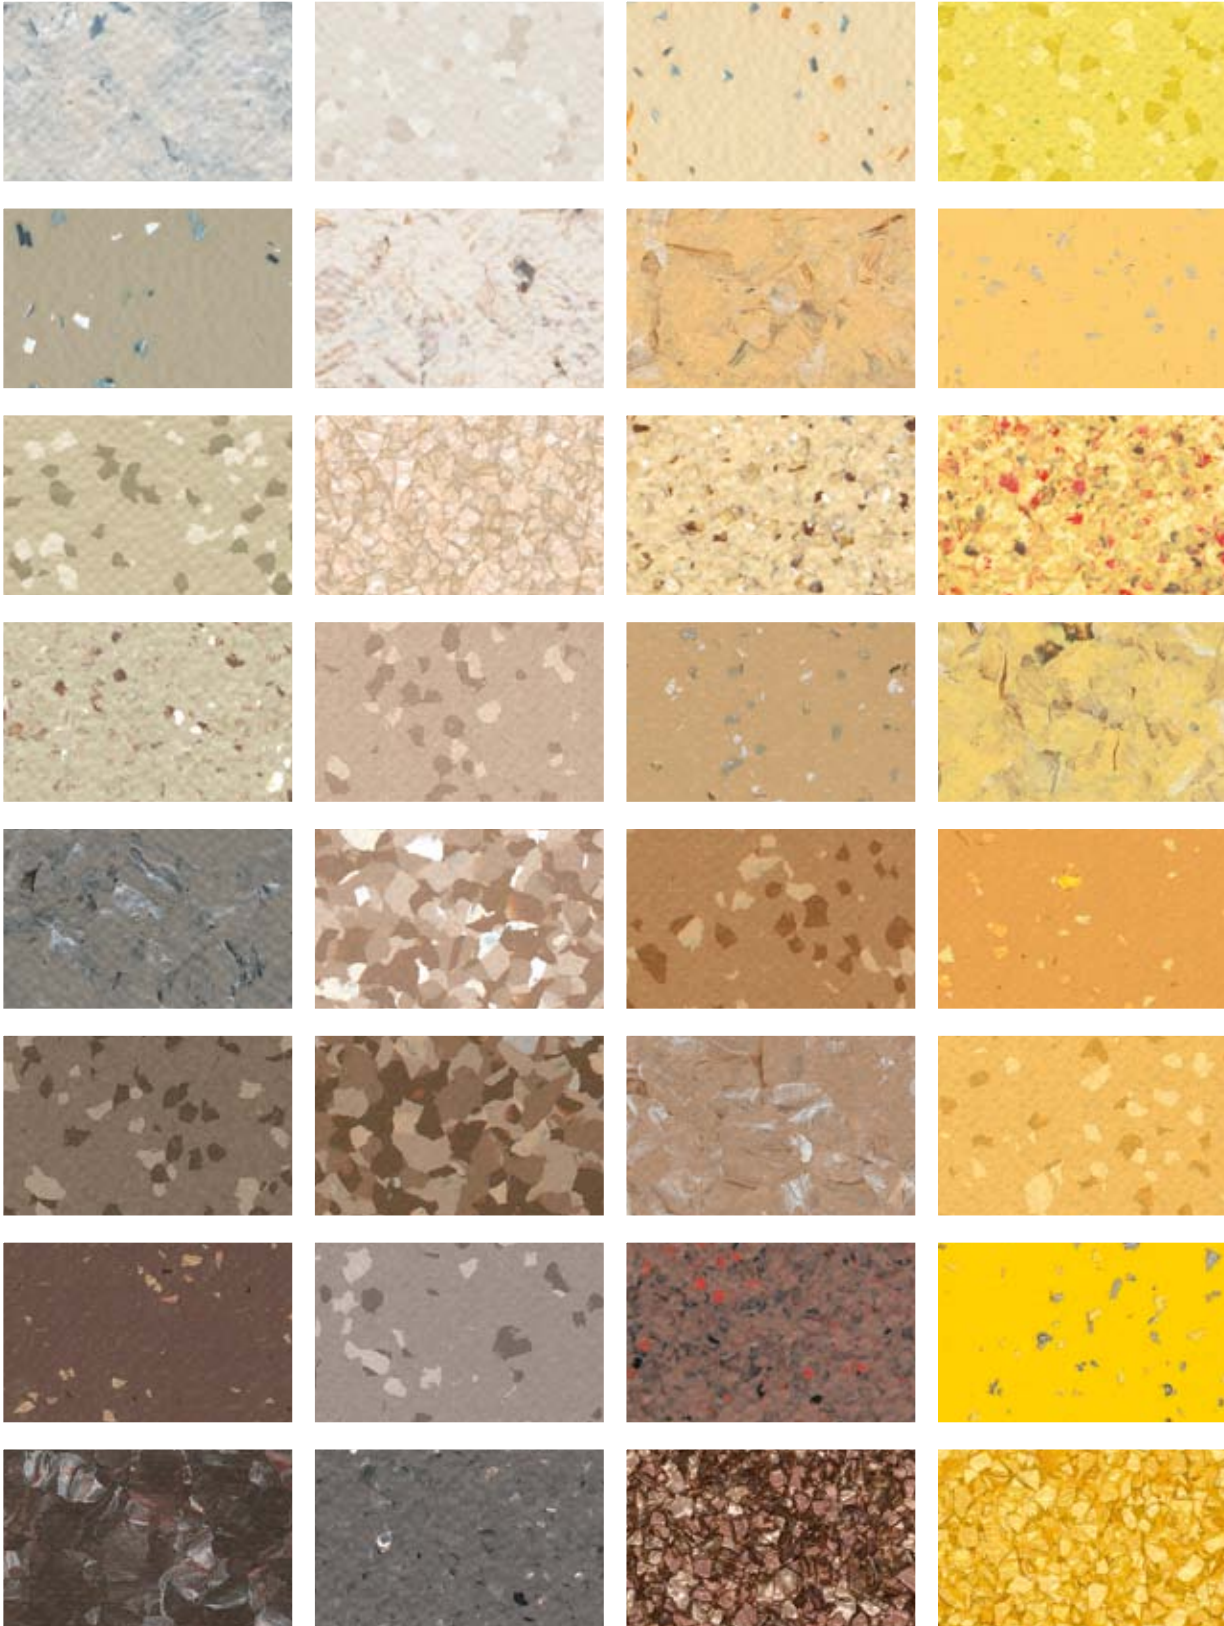




or softness to your decoration project.

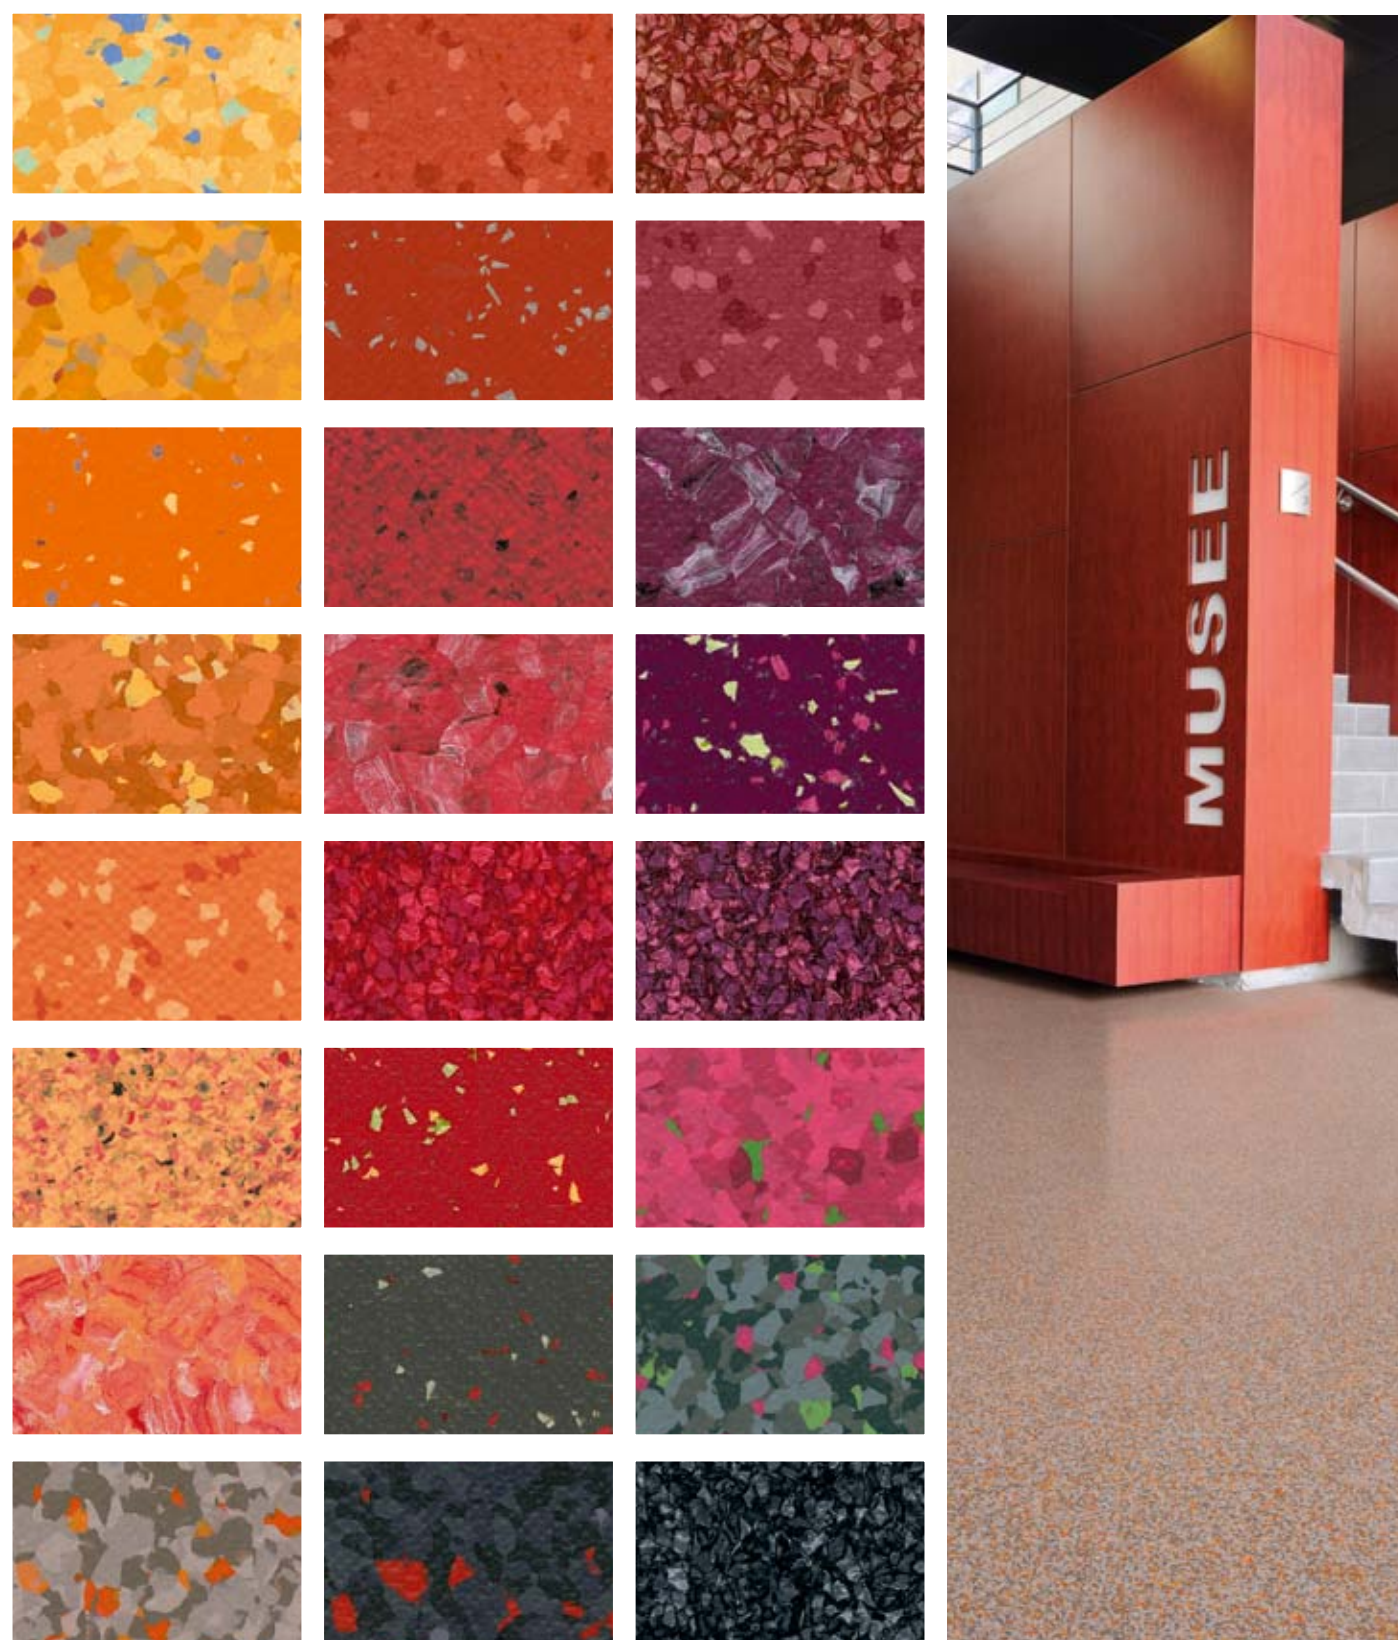

# TARALAY PREMIUM COMPACT

## PRODUCT DESCRIPTION

### ▶ FORUM / METALLICA / FUSION / BRAZILIA / COSTA RICA / INDIANA

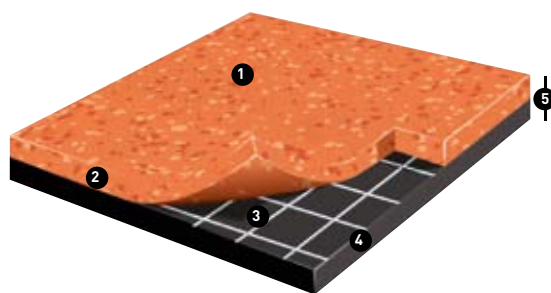

- 1 ProtecSol® treatment
- 2 Thick wearlayer with very densely pressed coloured chips
- 3 Glass fibre grid
- 4 Compact layer
- 5 Sanosol® treatment

TARALAY PREMIUM COMPACT is a multilayered calendared and pressed Vinyl floorcovering available in 2m wide sheet (Group T wear rating).

The product comprises a  $\geq 1$ mm thick, pure Vinyl, wearlayer incorporating very densely pressed coloured chips, and a compact backing which is calendared, pressed, and reinforced with a glass fibre grid, yielding a 6dB sound insulation rating.

TARALAY PREMIUM COMPACT's calendared wearlayer is treated with ProtecSol®, a UV cured anti-glazing surface treatment with a minimum 25 $\mu$ m thickness to facilitate easy maintenance and permanently eliminates the need for acrylic emulsion (metallisation).

The product is antistatic (AS class 1) and incorporates Sanosol®, a fungistatic and bacteriostatic treatment.

### Installation

Installing is under the responsibility of the installer. Installation has to be in accordance with the standard procedures. Technical installation guidelines are available from our technical department. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using a Gerflor welding rod.

### Maintenance

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of Vinyl or polyamide.

## TECHNICAL DATA

TARALAY  
PREMIUM COMPACT

Forum - Fusión  
Metallica - Brazilia  
Indiana - Costa Rica

## DESCRIPTION

Total thickness	EN 428	mm	2.00
	ASTM F386-02	inch	0.08"
Thickness of wearlayer	EN 429	mm	≥ 1.00
	ASTM F410	inch	≥ 0.04"
Weight	EN 430	g/m <sup>2</sup>	2550 - 2780
Width of sheet	EN 426	cm	200
		feet-inch	6'6"
Length of sheet	EN 426	lm	20
		feet	65'6"

## CLASSIFICATION

Norm / Product specification	-	-	EN 649
	ASTM F 1303-04	-	Type 1, Grade 1
European classification	EN 685	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
	ASTM E648-08	class	Class 1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R10

## PERFORMANCES

Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0
Wear group	EN 649 / EN 651	-	T
Coefficient of friction	ASTM D2047	-	0.83
Dimensional stability	EN 434	%	≤ 0.40
Residual indentation (requirement)	EN 433	mm	≤ 0.10
Residual indentation (value)	-	mm	≈ 0.03
Static Load	ASTM F970-00	inch	-0.002
Impact sound insulation	EN ISO 717-2	dB	6
Impact Insulation Class	ASTM E989-06	IIC	42
Thermal conductivity	EN 12 524	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Chemical product resistance	EN 423	-	OK
Chemical & stain resistance	ASTM F925-02	-	Excellent
Fungistatic & bacteriostatic treatment	-	-	Sanosol®
Surface treatment	-	-	ProtecSol®

## CE MARKING

CE	EN 14041	



SAMPLING SERVICE: call Gerflor to request your samples!



# FORUM COMFORT

 Comfort	<b>16dB</b>	 VHD	<b>Protocolsol®</b>	<b>Sanosol®</b>	 100% recyclable
---	-------------	---	---------------------	-----------------	---




WR : 0147

4511 Salado




WR : 2160

4328 Yanko



WR : 2331

3714 Smoky



WR : 0584

4468 Yaqui



WR : 2160

4324 Kamelik



WR : 0093

3701 Isar




WR : 2331

3710 Petchora




WR : 0122

8052 Congo



WR : 2261

8056 Cubango



WR : 2548

4107 Tage

WR: Welding rod - reference code 0585 + (WR) code

# METALLICA COMFORT



WR : 0173

9753 Energy



WR : 0613

9330 Moon



WR : 2249

9415 Celeste



WR : 0254

9745 Cosmic

WR: Welding rod - reference code 0585 + (WR) code



# FUSION COMFORT

 Comfort	<b>16dB</b>	 VHD	<b>Protacosol®</b>	<b>Sanosol®</b>	 100% recyclable
---	-------------	---	--------------------	-----------------	---



WR : 2253

4741 Lanzarote



WR : 0301

8011 Pinatubo



WR : 2227

4749 Vesuvio



WR : 2471

8240 Teide



WR : 0120

4745 Lopevi



WR : 2258

8022 Merapi

WR: Welding rod - reference code 0585 + (WR) code




# BRAZILIA COMFORT

	<b>16dB</b>		<b>Protacosol®</b>	<b>Sanosol®</b>	 <b>100% recyclable</b>
--	-------------	---	--------------------	-----------------	--



WR : 0153

8386 Boa Vista




WR : 2532

4327 Caxias



WR : 2182

4729 Mato Grosso



WR : 2240

8157 Goias




WR : 2389

8269 Ipanema




WR : 2374

4478 Copacabana



WR : 2259

4477 Maceio




WR : 2245

8062 Campinas




WR : 2242

8577 Amazonas




WR : 2536

4514 Santarem



WR : 2258

4329 Bacabal




WR : 3002

3715 Picos



WR : 0304

8736 Recife



WR : 2531

3709 Ceara




WR : 0063

3707 Paraiba

WR: Welding rod - reference code 0585 + (WR) code

# COSTA RICA COMFORT




WR : 0603

4743 Nublo\*



WR : 2265

8387 Balsa\*



WR : 2269

8587 Tortuga




WR : 2266

8395 Caballo\*




WR : 0026

4794 Talamanca



WR : 2234

8590 Quetzal




WR : 0234

8167 Papagayo\*




WR : 0337

4752 Sombra




WR : 2271

4456 Marina\*



WR : 2268

8027 Cacao




WR : 2257

8191 Meseta



WR : 2272

4746 Jaguar\*


WR: Welding rod - reference code 0585 + (WR) code  
 \*  : colours available in Tarastep (refer to page 35)

# INDIANA COMFORT




WR : 2160

4001 Ofu




WR : 0577

4002 Manua




WR : 0586

4003 Tao




WR : 2521

4475 Felidu




WR : 2161

4009 Tufoa




WR : 2174

4029 Baduna



WR : 2525

4520 Musala




WR : 2526

4469 Pemba




WR : 2159

4030 Vanuatu




WR : 2524

8053 Anambas




WR : 2297

4513 Padang




WR : 2166

4015 Guinée




WR : 2422

8262 Rodrigues



WR : 2282

8059 Nicobar




WR : 2523

4135 Aldabra




WR : 2169

8242 Masirah



WR : 2530

3705 Sumbawa



WR : 0931

4133 Agalega



WR : 2271

4476 Wattaru



WR : 2522

4142 Penang


WR: Welding rod - reference code 0585 + (WR) code




# TARALAY PREMIUM COMFORT

THE COMFORT RANGE ALL IN COLOUR

**67 Colours** creating soft or natural atmospheres

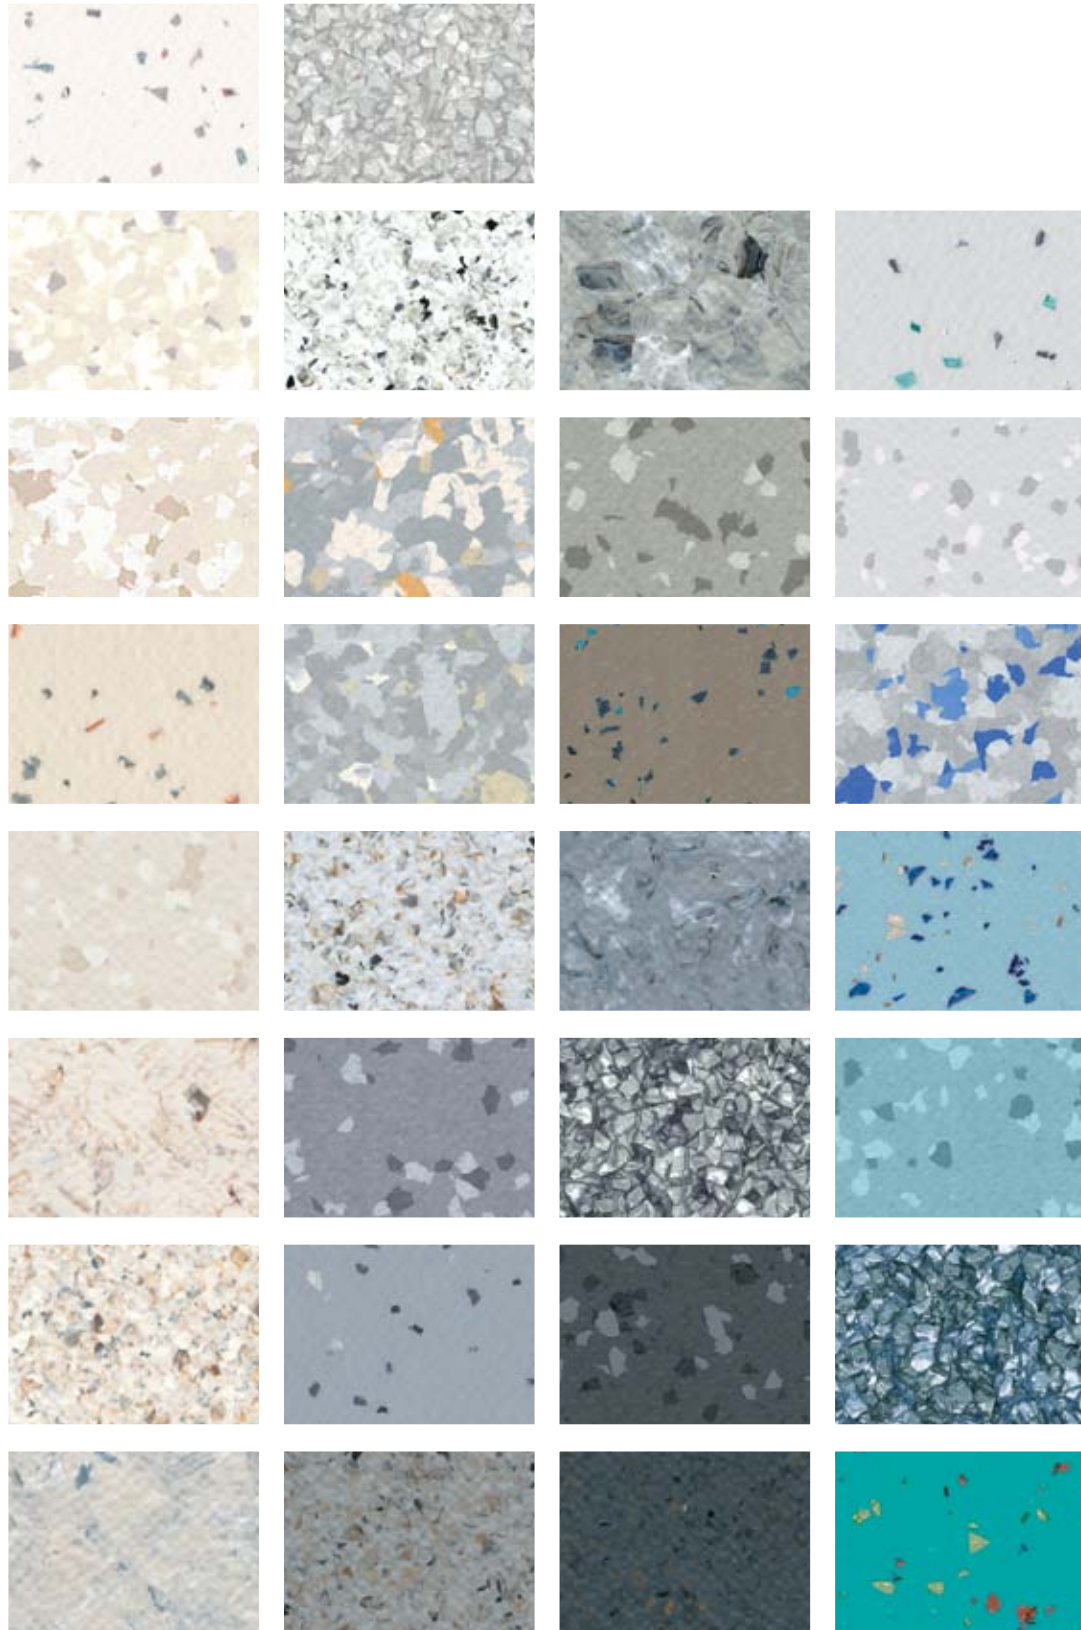


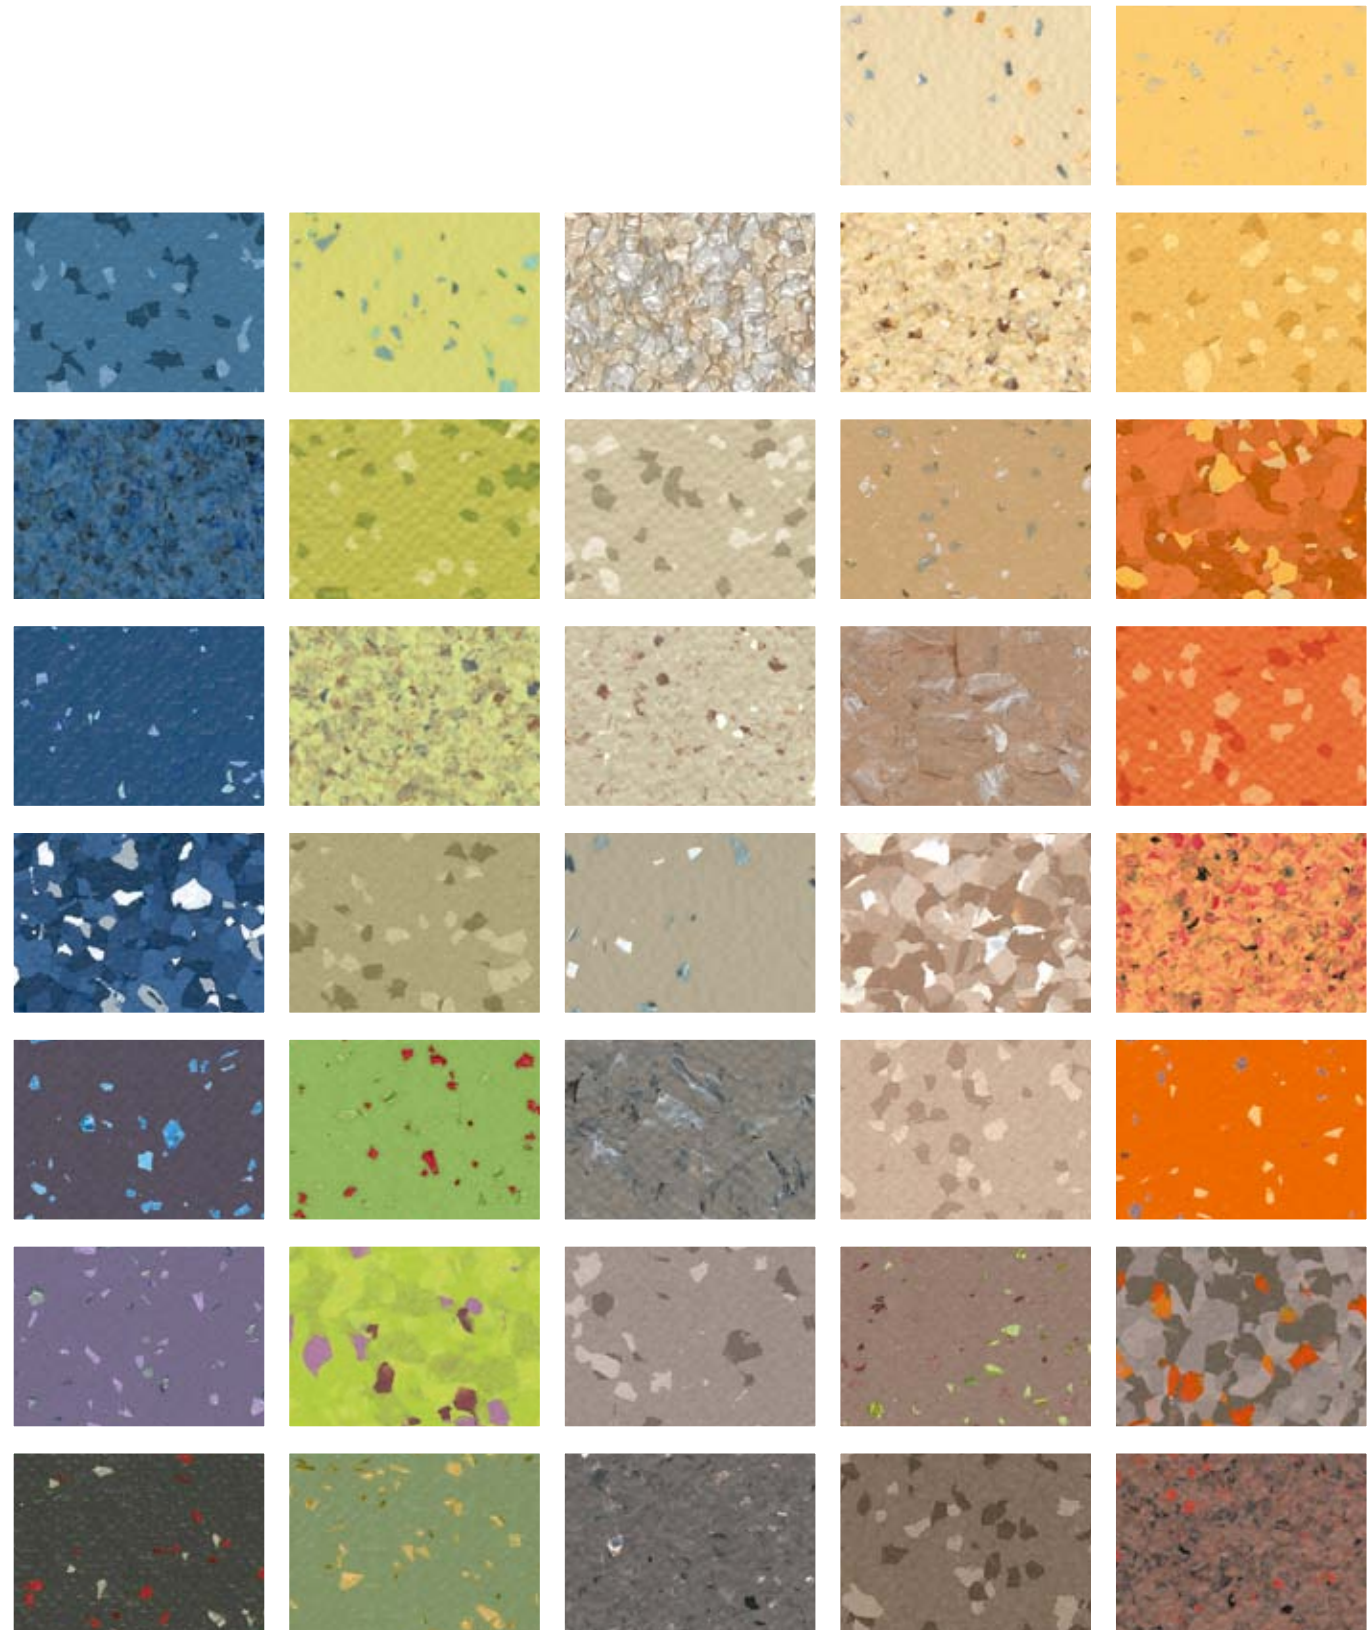


# TARALAY PREMIUM COMFORT

## PRODUCT DESCRIPTION

### ▶ TARALAY PREMIUM COMFORT

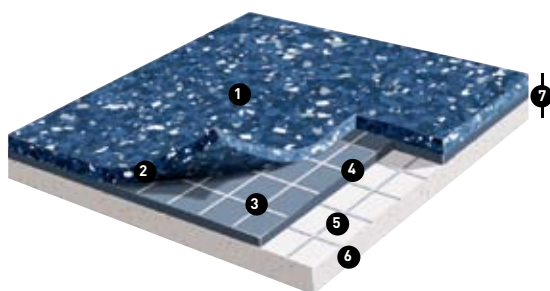

- 1 Protocolsol® treatment
- 2 Thick wearlayer with very densely pressed coloured chips
- 3 Glass fibre grid
- 4 Compact layer
- 5 Glass fibre mesh
- 6 VHD foam backing (Very High Density)
- 7 Sanosol® treatment
- 8 Anti-slip contrasting stair nose

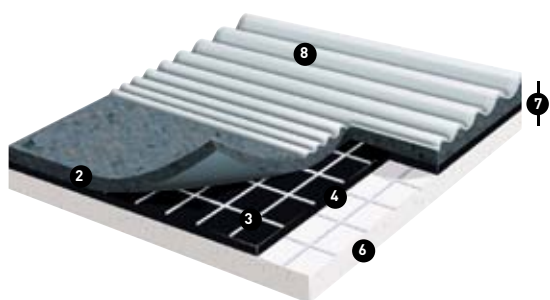

TARALAY PREMIUM COMFORT is a multilayered calendared and pressed acoustic Vinyl floorcovering available in 2m wide sheet (Group T wear rating).

The product comprises a  $\geq 1$ mm thick, pure, Vinyl wearlayer incorporating very densely pressed coloured chips, and a Very High Density (VHD) foam (yielding a 16dB sound insulation rating) reinforced with a glass fibre grid.

TARALAY PREMIUM COMFORT's calendared wearlayer is treated with Protocolsol®, a UV cured anti-glazing surface treatment with a minimum 25 $\mu$ m thickness to facilitate easy maintenance and permanently eliminates the need for acrylic emulsion (metallisation).

The product is antistatic (AS class 1) and incorporates Sanosol®, a fungistatic and bacteriostatic treatment.

### ▶ TARASTEP PREMIUM

TARASTEP PREMIUM is a multilayered calendared and pressed acoustic staircovering yielding a 17dB sound insulation.

It is an all-in-one staircovering incorporating the stair tread, a ribbed nosing in a tonal colour, a stair riser.

TARASTEP PREMIUM incorporates Sanosol®, a fungistatic and bacteriostatic treatment.

#### Installation

Installing is under the responsibility of the installer. Installation has to be in accordance with the standard procedures. Technical installation guidelines are available from our technical department. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using a Gerflor welding rod.

#### Maintenance

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of Vinyl or polyamide.



# TECHNICAL DATA



	TARALAY PREMIUM COMFORT Forum Fusion - Metallica		TARALAY PREMIUM COMFORT Brazilia - Costa Rica Indiana		TARASTEP PREMIUM
--	--	--	---	--	------------------

DESCRIPTION					
Total thickness	EN 428	mm	3.25	3.00	3.30
	ASTM F386-02	inch	0.13"	0.12"	
Thickness of wearlayer	EN 429	mm	≥ 1.00	≥ 1.00	1.00
	ASTM F410	inch	≥ 0.04"	≥ 0.04"	
Weight	EN 430	g/m <sup>2</sup>	3130 - 3260	2800 - 2810	3320
Width of sheet	EN 426	cm	200	200	100
	EN 426	feet-inch	6'6"	6'6"	
Length of sheet	EN 426	lm	25	25	22
	EN 426	feet	82'	82'	


CLASSIFICATION					
Norm / Product specification	-	-	EN 651	EN 651	EN 651
	ASTM F 1303-04	-	Type 1, Grade 1	Type C	
European classification	EN 685	class	34-42	34-42	34-42
Fire rating	EN 13501-1	class	Cfl-s1	Cfl-s1	Cfl-s1
	ASTM E648-08	class	Class 1	Class 1	
Static electrical propensity	EN 1815	kV	< 2	< 2	2
Slip resistance wet	DIN 51 130	class	R10	R10	-

PERFORMANCES					
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	EN 649 / EN 651	group	T	T	T
Coefficient of friction	ASTM D2047	-	1	1	
Dimensional stability	EN 434	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN 433	mm	≤ 0.20	≤ 0.20	≤ 0.20
Residual indentation (value)	-	mm	0.10	0.10	0.10
Static Load	ASTM F970-00	inch	0.004	0.004	
Impact sound insulation	EN ISO 717-2	dB	16	16	17
Impact Insulation Class	ASTM E989-06	IIC	59	59	
Thermal conductivity	EN 12 524	W/(m.k)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Chemical product resistance	EN 423	-	OK	OK	OK
Chemical & stain resistance	ASTM F925-02	-	Excellent	Excellent	
Fungistatic & bacteriostatic treatment	-	-	Sanosol®	Sanosol®	Sanosol®
Surface treatment	-	-	ProtecSol®	ProtecSol®	-

CE MARKING		
CE	EN 14041	



NEW PRODUCT OFFER: COLOURS ON DEMAND

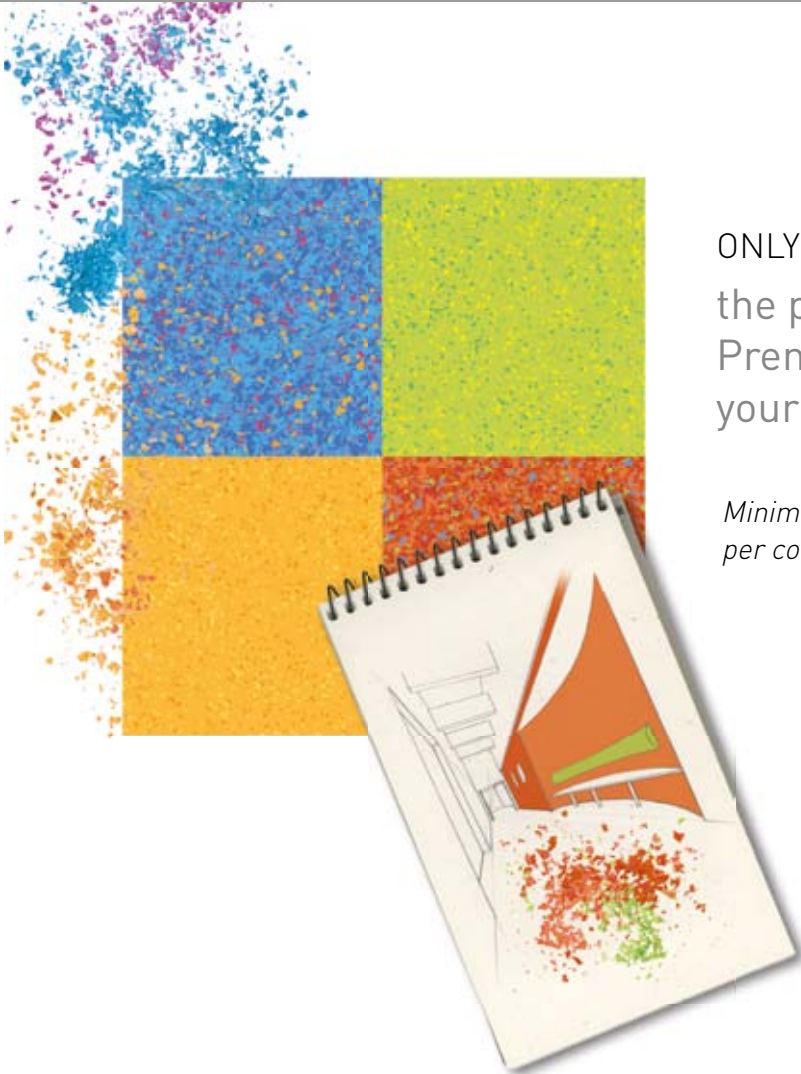


ONLY BY GERFLOR:  
the performances of Taralay Premium in the colours of your choice

*Minimum order quantity 2000 m<sup>2</sup> per colour, per project.*

You want to **surprise** people with **customised flooring**, Gerflor is adapting its organization and its industrial tools to give you the **freedom of design**.


Express your emotions, make up your own atmosphere, reinvent floors with My Taralay.

*For more information, please refer to the My Taralay sampling card*

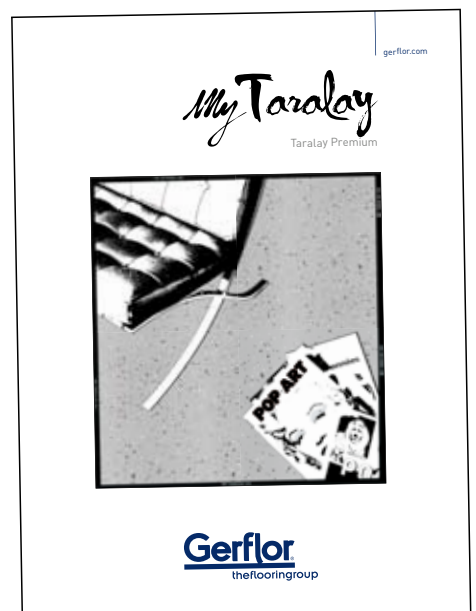


## HOW IT WORKS?


### 1 CHOOSE YOUR DESIGN *layout*




Brazilia



Indiana



Fusion



Forum

### 2 CHOOSE YOUR GRANULES *palette*




### 3 VISUALISE YOUR HARMONIES AND ORDER ONLINE ON [mytaralaygerflor.com](https://mytaralaygerflor.com)





# EXCLUSIVE PRODUCT BENEFITS

## MORE DURABLE THAN A PRINTED FLOORING



### Wear layer

The thickest wear layer in heterogeneous flooring


- Hardwearing floor

Colour within the whole thickness of the wear layer

- Bright and fade resistant colours, unique 3D effect

No transparent wear layer

- No “zooming” effect or alteration of the design, even with very heavy traffic



### VHD foam backing

Made up of consistent oval shaped cells – preserving its shape

- Perfect acoustic (16dB) / Indentation resistance (0.08mm) compromise
- Comfort for hospital staff, patients, teachers, pupils...
- Shock absorption in case of fall



Manufactured separately for a controlled consistent thickness

- No shearing under rolling load effect



## MORE EFFICIENT THAN A HOMOGENEOUS FLOORING

### 0% filler

- The best in the T group: the best resistance to abrasion on the market
- Bright colours not faded by chalk

### A pure PVC wearlayer

- Accrued durability
- Resistance to extreme scratches

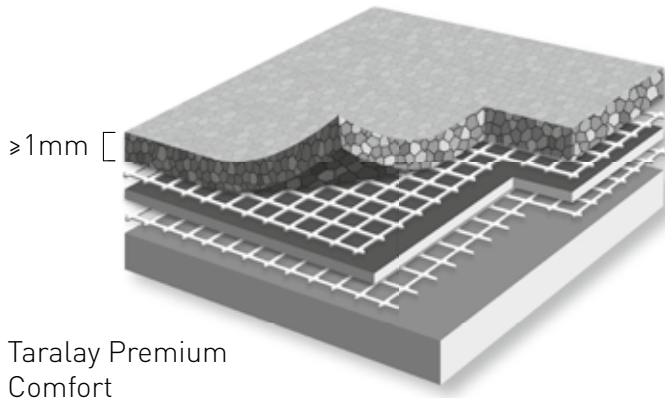

## Double fibre glass reinforcement

As apposed to a single fibre glass mesh




- Durable two-dimensional stability: no deformity or dilation due to rolling heavy loads (Wheeled equipment and Automated Guided Vehicles)

Spring effect

- Even distribution of impacts on the surface, therefore a reduction in marks left by medical equipment and furniture

Double reinforcement preserving the VHD foam backing

- Durable acoustic performance / Impact resistance guaranteed
- Wheeled equipment can be easily rolled in all directions: starting force and pushing reduced by 35%



## The only homogeneous design with a fibre glass grid

- No deformity over time

## The flexibility of multi-layered

- 6dB of acoustic insulation in the compact version and possible combination with comfort version (16dB): a complete solution for your decoration project with an optimized budget

# EXCLUSIVE PRODUCT BENEFITS

## 25 YEARS EXCELLENCE IN TERMS OF MAINTENANCE

**PROTECSOL®**

### Thickness of treatment

- Greatest on the market (25µm)

### Consistency of the thickness

- Due to an exclusive application method by electrostatic spraying

- **Easy maintenance:** No wax for life and no polish to avoid dust particles in the air in hospitals

### Unique formulation

- Flexibility of varnish adapted to the wear layer



**Durable resistance to scratches, scuffing, stains and chemicals**

## VARIETY AND DURABILITY OF COLOURS



### Unlimited association of colours

- 120 colours in stock
- The same colours available in compact or comfort version
- Coordinated backgrounds and tonics from one design to another
- All your colours on demand with


*My Taralay*

### Durability of your decoration project


- Colour within the whole thickness of the wear layer



## Compact heterogeneous flooring

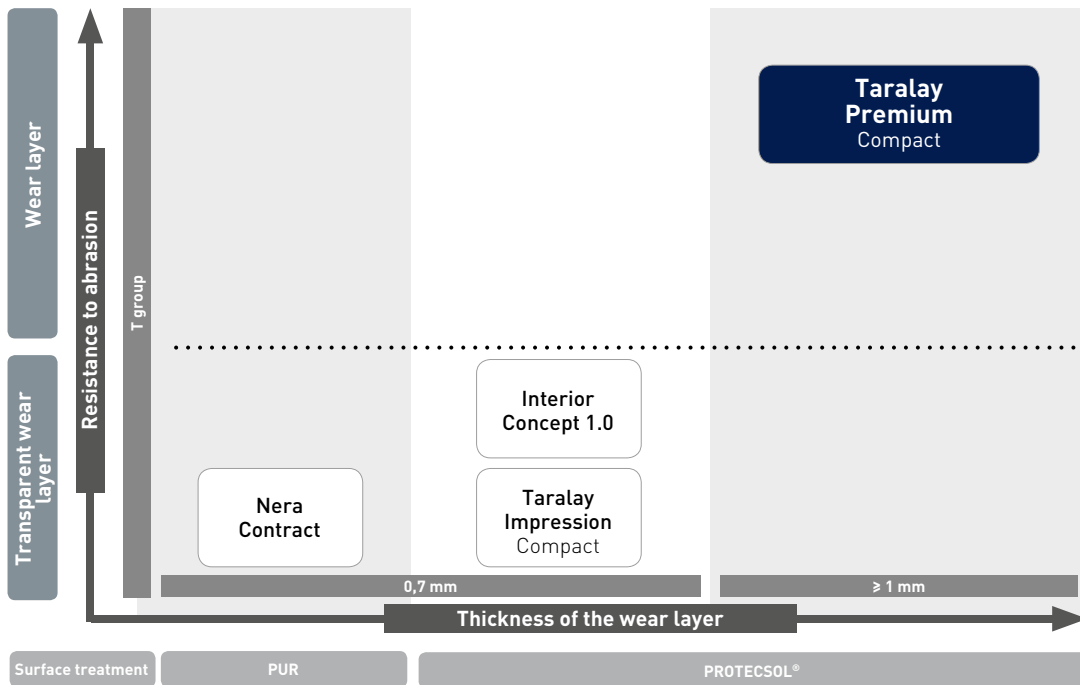

## Comfort heterogeneous flooring

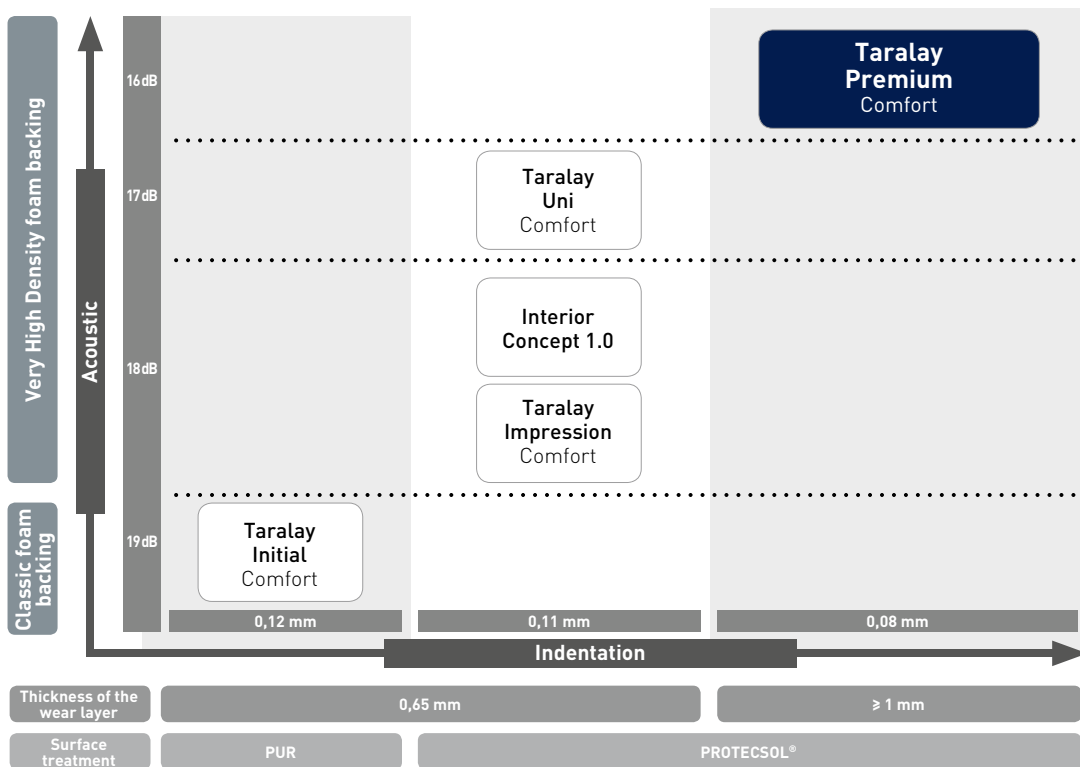


# ACCESSIBILITY SOLUTIONS

## SHOWER SYSTEM

Complete system: installing a shower is no longer an obstacle\*  
Floor/ wall concept for a shower room with a drain but no shower tray



ELEGANCE SD



0142 Turquoise

BRAZILIA SD



8736 Recife

*The whole Floor and Wall range for the shower system can be found in the Gerflor Shower System product guide or in the "Commercial flooring solutions" guide, in the Shower System section.*

*For more information, please consult the "Commercial flooring solutions" guide, in the Tarastep section.*



# TARASTEP PREMIUM

Complete steps with contrasting stair noses for a better visibility\*

 <b>Confort</b>	<b>17 dB</b>	 <b>VHD</b>	<b>Sanosol®</b>	 <b>100% recyclable</b>
---	--------------	--	-----------------	--




4743 Nublo WR : 0603



8167 Papagayo WR : 0234



8387 Balsa WR : 2265

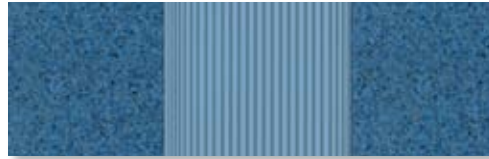

4456 Marina WR : 2271



8395 Caballo WR : 2266



4746 Jaguar WR : 2272

WR: Welding rod - reference code 0585 + (WR) code

## Tactile strip\*

Tactile strips with pads to create visual and tactile contrast with the floor




0005 Yellow



0007 Light Grey



0009 Dark Grey

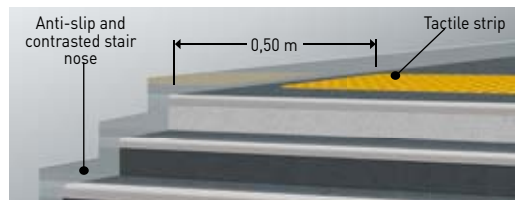

## Floor marking\*



\*Complete Gerflor offer to meet the needs of all users including those with mobility issues and visual impairments



# COMPLETE FLOOR AND WALL SOLUTIONS

## MURAL ULTRA



Mural Ultra  
Connecting profiles  
Taralay Premium Forum

7203 Andalusia  
4206 Orange  
8056 Cubango




Mural Ultra  
Skirting  
Taralay Premium Fusion

7406 Toscana  
9403 Bleu  
4464 Ruapehu

9 coordinated colours with the Taralay Premium range



7610 Nord-Norge



7304 Limbourg



7203 Andalusia



7702 Connemara



7321 Tenere



7406 Toscana



7710 East Midlands



7102 Provence



7503 Bavaria

For more information please consult the "Commercial flooring solutions" guide, in the Mural Ultra section.

## SPM WALL PROTECTION AND HANDRAILS

### Decorative wall protection



Decowood



Decotrend

### Wall and door sheet solution



Decochoc

### Handrail solutions



Decowood Escort



Anodised Escort



Escort




Starline




For more information please consult the "SPM Wall protection and handrails" brochure.

# FINISHES AND TECHNICAL SOLUTIONS

## Skirting and coving solutions




Semi rigid skirting




Full coving


## Stair solutions




Stair clip system



Aluminium Stair nosing




Smooth PVC stair nosing




Grooved PVC stair nosing


## Profile solutions




Diminishing profile




Connecting profile




Connection profile



Shower threshold profile



Ramp edges



Aluminium profile

## Welding solutions



Welding rods



SG 916



For more information please consult the "Finishes and Technical solutions" brochure.







SAMPLING SERVICE: call Gerflor to request your samples!

# TARALAY PREMIUM

## ECO RESPONSIBLE SOLUTIONS



 Health & safety	Selected and responsible raw materials	<b>NO</b> heavy metal, <b>NO</b> solvent. <b>NO</b> formaldehyde, <b>NO</b> substance potentially subject to REACH* restrictions.
	Low VOC emissions	<ul style="list-style-type: none"> <li>- Comply with <b>AgBB</b> protocol</li> <li>- Floorscore certified</li> <li>- Volatile Organic Compound (<b>VOC</b>) emissions of <b>&lt;250 µg/m³ after 28 days</b>, using European procedures</li> <li>- No formaldehyde and carcinogenic emissions</li> </ul>
	Fully hygienic solutions	The <b>Sanosol®</b> treatment prevents mould and bacterial (bacteriostatic) growth.
 Recycling	100% recyclable materials	<b>Gerflor will help recycle its products at the end of their life cycle</b>
	Uses recycled materials	<ul style="list-style-type: none"> <li>- Made from up to <b>53%</b> recycled content</li> <li>- <b>100%</b> of recycled materials are inspected and exempt from REACH* restrictions.</li> </ul>
 ISO 14001	ISO 14001 certified	Gerflor industrial sites hold <b>ISO 14001</b> accreditation.
 Life-cycle analysis	Long life at low cost	Opting for high quality "no polish for life" flooring such as one of our patented <b>ProtecSol®</b> products, you can drastically reduce the usage of chemical product and water and ensure the best financial outcome but also the security of knowing the designs and colours will stand the test of time even in high traffic areas.

\*REACH is the new European regulation on registering, assessing and authorising chemical products within the European Union.

Please do not hesitate to ask us for a full assessment of your project.



## CONTRIBUTION TO LEED™ CERTIFICATION

LEED™ Certification (Leadership in Energy and Environmental Design) is an internationally recognized green building certification system. It provides third-party verification that a building or community was designed and built using strategies aimed at improving performance across all the metrics that matter most: energy savings, water efficiency, CO<sub>2</sub> emissions reduction, improved indoor environmental quality, and stewardship of resources and sensitivity to their impacts.

### Gerflor contribution

- Low emitting materials: Floorscore certified products
- Products containing pre-consumer recycled materials
- 2 LEED™ specialists part of Gerflor staff



### Reference:



KAUST University - Kingdom of Saudi Arabia  
Photo credits: Oger international / KAUST University

## Recycling



gerflor.com

ARCHITECTURE  
DECORATION  
SPORT  
TECHNOSPECIFIC

**ASIA:** Gerflor Asia

Tel: +852 9222 6355 - Fax: +852 3006 1449  
e-mail: gerflorasial@gerflor.com

**AUSTRALIA/NEW ZEALAND:** Gerflor Australasia Pty. Ltd

Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119  
e-mail: gerflor@gerflor.com.au

**AUSTRIA/SWITZERLAND:** Gerflor GmbH

Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218  
e-mail: austria@gerflor.com - switzerland@gerflor.com

**BELGIUM/LUXEMBURG:** Gerflor Benelux

Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14  
e-mail: gerflorbelgium@gerflor.com

**CANADA:** Gerflor International

Tel: +1-819-812-7310  
e-mail: gerflorcanada@gerflor.com

**CHINA:** Gerflor floorings (China) Co. Ltd.

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998  
e-mail: gerflorchina@gerflor.com

**FINLAND:** Gerflor Oy

Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152  
e-mail: info@gerflor.fi

**FRANCE:** Gerflor - Service Express:

**N°Azur 0 810 569 569** **N°Azur FAX 0 810 569 570**

e-mail: contactfrance@gerflor.com

**GERMANY:** Gerflor Mipolam GmbH

Tel: 0 22 41-25 30-0  
e-mail: GerflorMipolam@Gerflor.com  
Kunden-Service: kundenservice@gerflor.com  
Tel: 0 22 41-25 30-131 - Fax: 0 22 41-25 30-100  
SAT Service und Anwendungstechnik: Technik@Gerflor.com  
Tel: 0 22 41-25 30-555 - Fax: 0 22 41-25 30-550

**IRELAND:** Gerflor Ltd

Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759  
e-mail: gerflorirl@gerflor.com

**ITALY:** Gerflor S.p.A.

Tel: +39 02 90 78 60 12 r.a. - Fax: +39 02 90 42 74 84  
e-mail: gerfloritalia@gerflor.com

**LATIN AMERICA (Brazil):** Gerflor América Latina

Tel: +55 11 38 48 20 20 - Fax: +55 11 38 48 20 23  
e-mail: gerflor@gerflor.com.br

**MIDDLE EAST:** Gerflor Middle East

Tel: +966 3 847 1779 - Fax: +966 3 847 1781  
e-mail: gerflorME@gerflor.com

**NETHERLANDS:** Gerflor BV

Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89  
e-mail: gerflorNL@gerflor.com

**OTHER COUNTRIES:** Gerflor International

Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13  
e-mail: gerflorcontract@gerflor.com

**POLAND:** Gerflor Polska Sp z o.o.

Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33  
e-mail: info@gerflor.pl

**PORTUGAL:** Gerflor Iberia, SA

Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44  
e-mail: gerflorportugal@gerflor.com

**RUSSIA:** Gerflor Moscow Office

Tel: + 7 499 783 63 69 / 81 - Fax: + 7 499 783 62 52  
e-mail: gerflorrus@mospk.east.ru

**SCANDINAVIA:** Gerflor Scandinavia a.s.

Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80  
e-mail: gerflorscand@gerflor.no

**SPAIN:** Gerflor Iberia, SA

Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85  
e-mail: gerfloriberia@gerflor.com

**UNITED KINGDOM:** Gerflor Ltd

Sample service: Contractuk@gerflor.com  
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

**USA:** Gerflor North America

Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753  
e-mail: info@gerflorusa.com



FIND GERFLOR ON YOUR SMART PHONE

All Gerflor products, colours in full screen mode, associated documents and the My Taralay application

To connect, <http://m.gerflor.com>  
Or with the help of a "Mobiletag" application, scan the code 2D or "QR code" here:



Committed to sustainable development

**Gerflor**<sup>®</sup>  
theflooringgroup