Floor for the home

2023 Collection

Gerflor®

Table of contents

04. Gerlor Group
10. Gerflor decoration trends 2023
14. Make the right choice
14. Senso range

16. LVT interlocking
16. Senso Premium Clic
26. NEW Senso Clic
34. Senso 20 Lock

40. LVT looselay
40. Senso Easy Premium

46. LVT self adhesive
46. Senso SA Premium
52. Senso self-adhesive
62. Vinyl tiles

65. Cleaning - numerical index Communication tools
65. Cleaning instructions
66. Numerical index
67. Communication tools

Find out more on
gerflor.com

Find us on
social media:

Gerflor Group
continually moving forward

To create, manufacture & market innovative, design-led & eco-responsible solutions for flooring, walls & their finishes.

To anticipate the specific needs of the users, specifiers, installers & distributors around the world.

To provide competitiveness & success for all our customers.

International Presence
& Proximity To Our Customers Through:

- ✓ 30 subsidiaries & a broad network of distributor partners.
- ✓ 19 production plants & logistic hubs.
- ✓ STAFF: 4 200 employees, 40 nationalities.

Sales growth
Gerflor group turnover

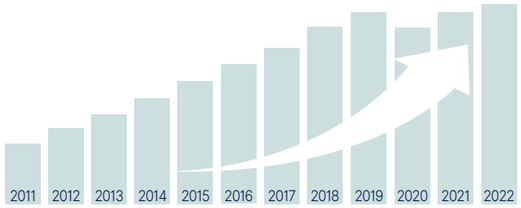

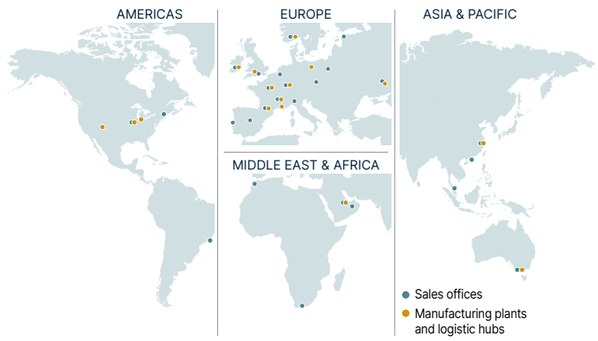

Industrial Expertise
in several fields

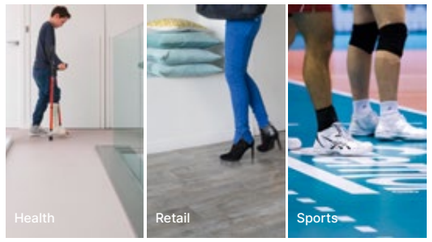

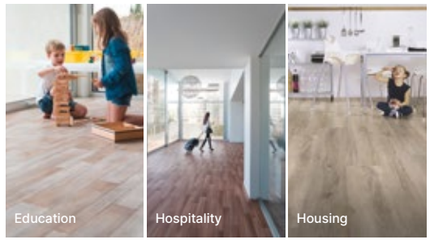

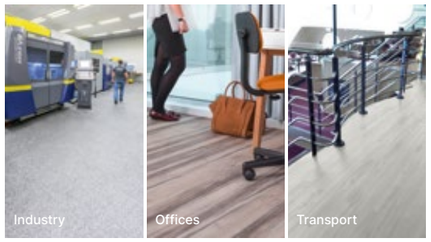

Design
trendy & creativity

- ✓ Our in-house Creation Studio brings product design originality & freshness.
- ✓ Our innovative ideas perfectly fit both market needs & creative expectations of interior designers, housing specifiers & architects.
- ✓ Our moto, be different
  70% of sales are achieved with product ranges less than three years old.

Decorator

- ✓ Every year, Gerflor renews its collections and reates new designs
- ✓ Designs solutions that can be combined and mixed to create custom spaces

Innovative Solution

GERFLOR SPIRIT

- ✓ 3 Research & Development centers dedicated to product innovation.
- ✓ 144 engineers for ultimate flooring solutions that anticipate the needs of our customers.
- ✓ Partnerships with laboratories and universities around the world enable Gerflor to benefit from the last materials & emerging technologies.

Innovation distinguishes between a leader and a follower.

Gerflor Group
continually moving forward

Expert
quality & choice

- ✓ Extensive product range
- ✓ Top-quality products designed for high traffic
- ✓ Highly resistant
- ✓ Solutions for all customer needs:
  Installation type, size, all-uses, related accessories

Clever
quick & easy

- ✓ Make life easier
- ✓ Products installed without glue and without subfloor preparation
- ✓ Optimal user-friendliness
- ✓ Can be installed with a utility knife

Inventor innovation for the home

1985

Self-Adhesive Tiles
A revolutionary Peel'n Stick product: fast and easy to lay

2006

Senso
Self adhesive planks with an ultra realistic look

2010

Interlocking
Interlocking vinyl tiles and planks

2014

Adjust
The easiest solution. No clic, no glue

2018

Senso Clic Premium
Simply the best for your floor

2020

Senso Premium Easy
Looselay solution: no clic no glue.
Mix and match design: 12 designs to associate.

2022

Senso Premium Clic New Generation
Fold down patented Gerflor

2023

Senso Clic New Generation
Fold down patented Gerflor

Gerflor Group
continually moving forward

Market
informations & orientations in Western Europe

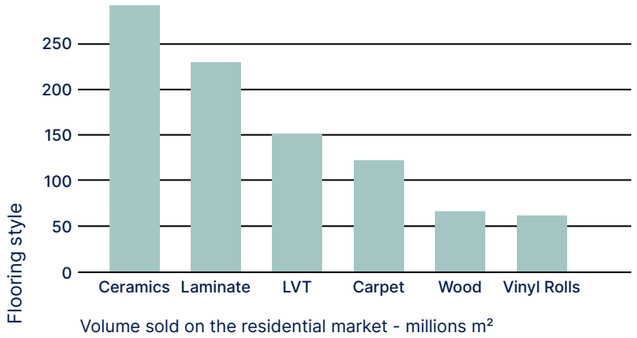

Type

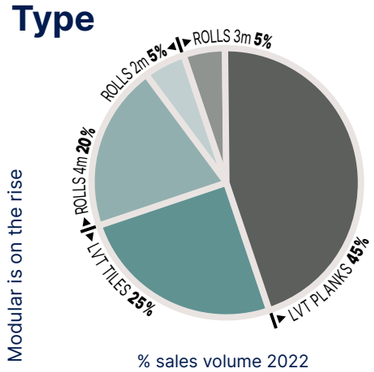

Design

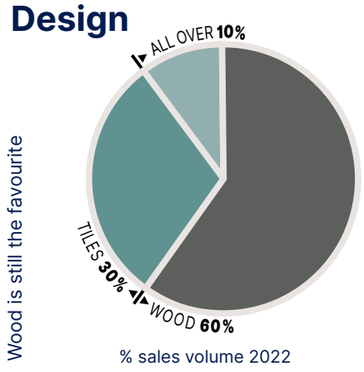

A solution eco-responsible
Committed to sustainable development

Going Further

Raw materials
Healthy raw materials
No heavy metals, no solvents, no formaldehyde

Sustainable products
recycled content integration

Indoor air quality
Low VOC emissions

- All our products conform to **Floorscore, AgBB, A+ (France) and M1 (Finlande)** standards.
- TVOC emissions after 28 days **< 100 µg/m³.**
- Gerflor looselay solutions (GFT rolls, tiles and snap-together planks): no glue required.

VOC Free system

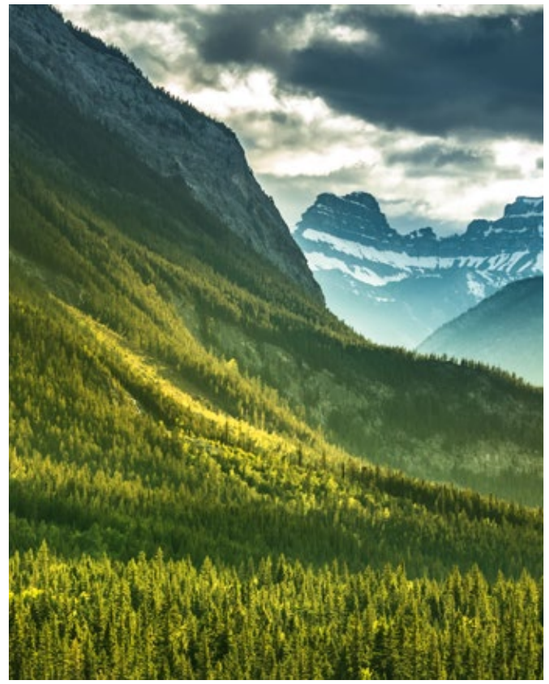

Environmental footprint
- All our products are **eco-designed** based on a life-cycle analysis model in order to **reduce their environmental impact.**
- Our products are regularly assessed in accordance with **ISO 16000 standards.**

Recycling
Second Life is a Gerflor's innovative program for collecting installation waste and non-glued end-of-life products.
In partnership with our installers, this program is now fully effective in France and Germany and in the process of being implemented in Italy, Benelux and Scandinavia.

All of our Clic products contain up to 55% recycled materials (production falls, laying falls, end of life).

WATER CONSUMPTION SINCE 1998

Did you know?
All inks used in the group's factories are solvent-free and water-based. The printing cylinders are cleaned with biodegradable agents and the wastewater inks are recycled by evaporation.

Looselay products / No glue
VOC free system

Gerflor Decoration trends

Japandi

Simplicity, Purity, Handmade weaving
Meticulous details, Lightness,
Natural Materials, Bold

4645 C | 5655 C | 5773 C | 2310 C

Terra Luna

Roundness, Oversized, Raw Materials,
Space, Primitive Shapes, Wild

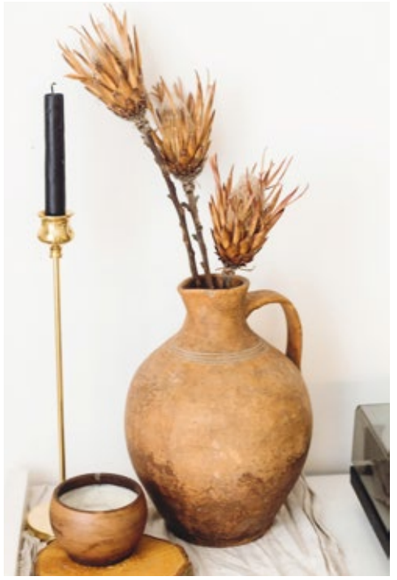

7531 C

7525 C

7520 C

7600 C

Gerflor Decoration trends

Classic Clash

Marble's Triumph, Stone Mix,
Macro Terrazzo,
Timeless Beauty, Retro,
Richness

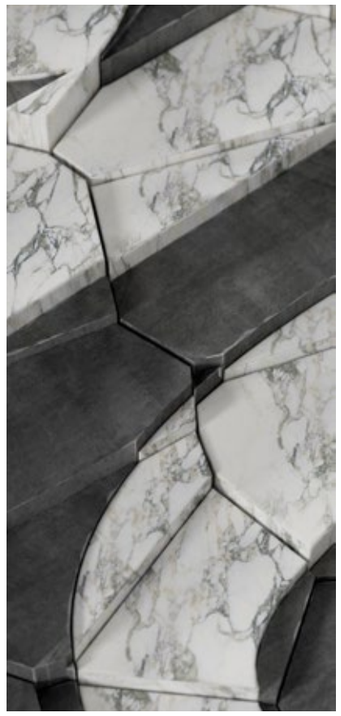

423 C

547 C

7526 C

Travertin

Tuscan

Travertin

Transparency

Tie and Dye, Light, Plexiglass, Fluid, Liquid,
Mother Pearl

Gotha Clear

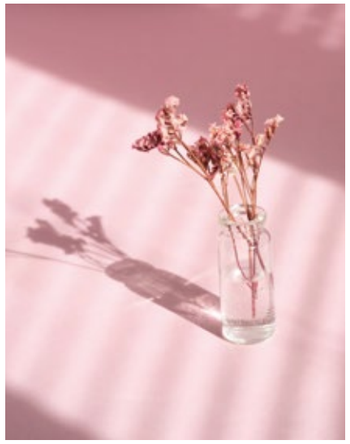

680 C

5473 C

338 C

1215 C

Pepper Light

LVT solutions
Gerflor 2023

Make the right choice!

	Interlocking			Looselay	Self Adhesive	
	SENSO PREMIUM CLIC	NEW SENSO CLIC	SENSO 20 LOCK	SENSO EASY PREMIUM	SENSO SELF-ADHESIVE PREMIUM	SENSO SELF-ADHESIVE
Laying system	Looselay			Looselay	Fully adhered	
Main benefits	• New clic system: vertical small side and horizontal large side • Quick and easy		• Rigid structure: better stability • Easy removable	• The easiest laying solution • No messy residue	• Easy and quick installation	
Price	€ € €	€ €	€	€ € €	€	€
Tools needed	Ruler + utility knife + rubber mallet	Ruler + utility knife + rubber mallet	Ruler + utility knife	Ruler + utility knife	Ruler + utility knife	Ruler + utility knife
Thickness (mm)	4.5	4.2	3.4	4	2.5	2
Wear layer thickness (mm)	0.55	0.3	0.2	0.55	0.3	0.2
European classification	23 / 33	23 / 31	22	33 / 42	23/31	22
Traffic resistance	+++	++	+	+++	++	+
Fire rating	$B_{fl}S1$	$B_{fl}S1$	$B_{fl}S1$	$B_{fl}S1$	$B_{fl}S1$	$B_{fl}S1$
Sound insulation (dB)	4	4	3	4	5	3
Room impact noise	Class C	Class C	-	Class B	Class C	Class C
Compatible with wet rooms	OK	OK	OK	OK	OK	OK
Domestic use guarantee*	20 years	12 years	10 years	15 years	12 years	10 years
	Page 16	Page 26	Page 34	Page 40	Page 46	Page 52

* For more details on guarantee, see www.gerflor.com

Senso Range

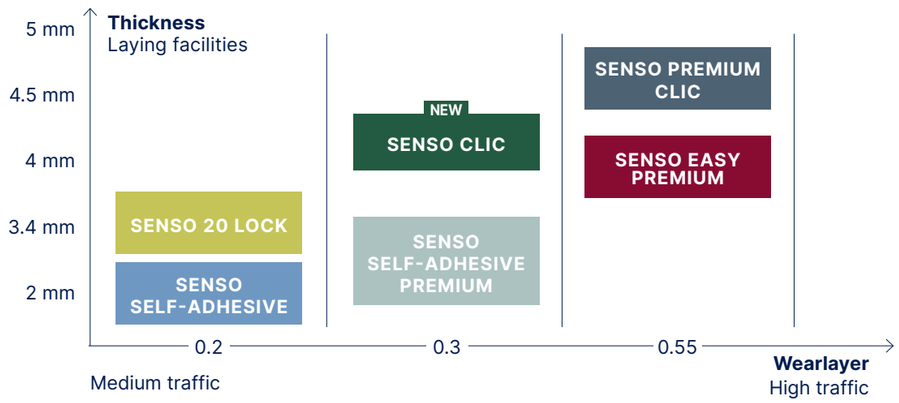

Product Benefits

+ Design **references**

Style organised collection
Quality of designs and embossing
Textured surface

All **uses**

Watertight
10 years minimum warranty:
total finish (planks + grout)

Makes life **easier**

Easy to transport: modular format
Easy to install: adhesive or interlocking
Easy to cut: utility knife
Easy to clean: soapy water

Eco-friendly

TVOC < 100 µg/m³
100% recyclable
Lead-free
Formaldehyde-free
Solvent-free
Soapy water cleaning

TVOC < 100 µg/m³ after 28 days

3 Installation **technologies**

Interlocking
Looselay
Self-Adhesive

SENSO
PREMIUM
CLIC

DUO CORE Rigid & Comfort

Easy to install and cut
in hard-to-reach areas

Direct laying on ceramic
Max 5mm / 2mm

Bay window installation
Max 60°

Scratch resistant

Traffic resistant

Suitable for wet rooms

Guarantee 20 years
Domestic use

MADE IN FRANCE



Scan and discover INTERIOR DESIGNER

LVT Interlocking Planks

Class.23/33

1-Pecan
Size: 123.9 × 21.2 cm
Code: 6053 0511 - EAN: 3475710551727

2-Sunny White
Size: 123.9 × 21.2 cm
Code: 6053 0286 - EAN: 3475710551741

3-Kola
Size: 123.9 × 21.2 cm
Code: 6053 0309 - EAN: 3475710551734

4-Greenland Grey
Size: 123.9 × 21.2 cm
Code: 6053 1298 - EAN: 3475710551819

5-Authentic Blond
Size: 123.9 × 21.2 cm
Code: 6053 0829 - EAN: 3475710551758

6-Greenland Light
Size: 123.9 × 21.2 cm
Code: 6053 1299 - EAN: 3475710551826

7-Columbia
Size: 123.9 × 21.2 cm
Code: 6053 0837 - EAN: 3475710551765

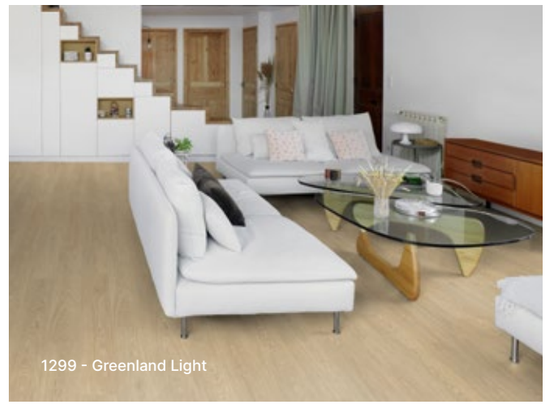
1299 - Greenland Light

LVT Interlocking Planks

Class.23/33

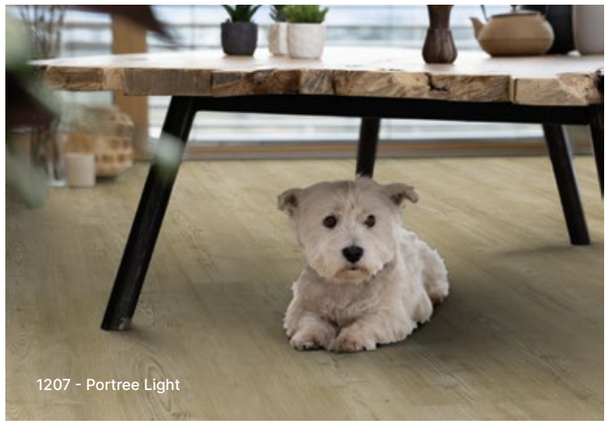

1207 - Portree Light

1-Portree Light
Size: 123.9 × 21.2 cm
Code: 6053 1207 - EAN: 3475710551802

2-Columbia Taupe
Size: 123.9 × 21.2 cm
Code: 6053 0953 - EAN: 3475710551772

3-Authentic Nature
Size: 123.9 × 21.2 cm
Code: 6053 0828 - EAN: 3475710551789

4-Cleveland Dark
Size: 123.9 × 21.2 cm
Code: 6053 0728 - EAN: 3475710551796

0953 - Columbia Taupe

LVT Interlocking Planks & tiles
Class.23/33

1-Kariba Dark
Size: 146.1 × 24 cm
Code: 6052 1195 - EAN: 3475710551598

2-Kariba Blond
Size: 146.1 × 24 cm
Code: 6052 1213 - EAN: 3475710551611

3-Kariba Taupe
Size: 146.1 × 24 cm
Code: 6052 1196 - EAN: 3475710551604

XL Format

1-Gotha Clear
Size: 72.9 × 38.9 cm
Code: 6051 0938 - EAN: 3475710551673

2-Manhattan Clear
Size: 72.9 × 38.9 cm
Code: 6051 0826 - EAN: 3475710551666

3-Industry
Size: 72.9 × 38.9 cm
Code: 6051 0819 - EAN: 3475710551659

4-Villa Beige
Size: 72.9 × 38.9 cm
Code: 6051 1184 - EAN: 3475710551697

5-Shale Beige
Size: 72.9 × 38.9 cm
Code: 6051 1205 - EAN: 3475710551703

6-Shale Black
Size: 72.9 × 38.9 cm
Code: 6051 1297 - EAN: 3475710551710



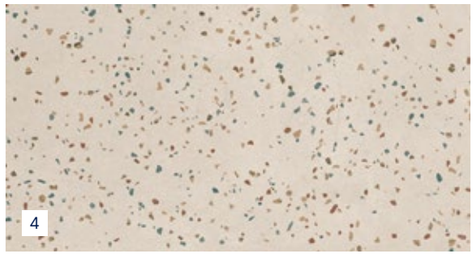

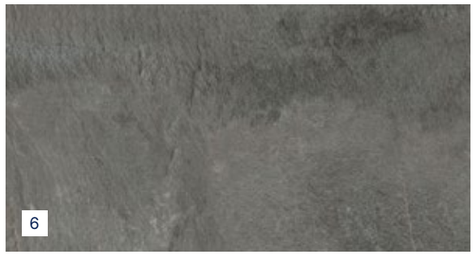

Technical Characteristics

Description					
Total thickness	EN ISO 24346	mm	4.5		
Thickness of wearlayer	EN ISO 24340	mm	0.55		
Weight: mass per unit area	EN ISO 23997	g/sqm	7118		
Size	EN ISO 24342	mm	planks: 212×1239	planks: 240 × 1461	tiles: 389 × 729
Number of planks / tiles and sqm per box	-	planks / tiles	8 planks / 2.10 sqm	7 planks / 2.45 sqm	7 tiles / 1.98 sqm
Classification					
Norm / Product specification	-	-	EN ISO 10582		
European classification	EN ISO 10874	class	23 / 33		
Fire rating - Classification	EN 13501-1	class	Bfl-s1		
Static electrical propensity	EN 1815	kV	< 2		
Slip resistance wet: ramp test with oil	DIN 51130	class	R10		
Performance					
Wear resistance	EN 660.2	mm^3	< 2.0		
Wear group	-	group	T		
Type binder content	ISO 10582	type	I		
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.15		
Residual indentation	EN ISO 24343-1	mm	≤ 0.10		
Sound insulation	EN ISO 717-2	dB	4		
Room impact noise	NF S 31074	dB	79		
Castor chair test	ISO 4918	-	OK		
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25		
Colour fastness	EN 105 - B02	degree	≥ 6		
Chemical products resistance	EN ISO 26987	class	OK		
Surface treatment	-	-	Pureclean+		
Guarantee for residential use	-	year	20		
Environment / Indoor Air Quality					
TVOC after 28 days	ISO 16000-6	$\mu g/m^3$	< 10		
Ce Marking					
CE	EN 14041				

Areas of use: domestic use

Composition 100 % REACH
Phtalate free (except recycled content)

REACH · MADE IN FRANCE · AFAQ ISO 9001 VERSION 2008 ISO 14001

HEALTH

TVOC < 10 $\mu g/m^3$ after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission
- No glue

ENVIRONMENT

- ISO 14001
- Soapy water cleaning

Scan and discover
The complete range

Laying

1 important

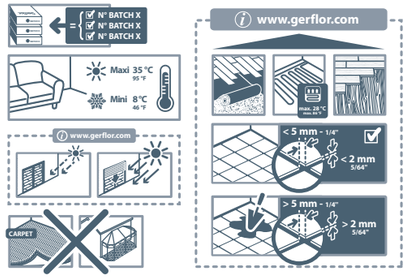

2 preparation

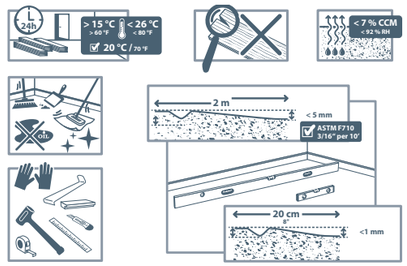

3 installation

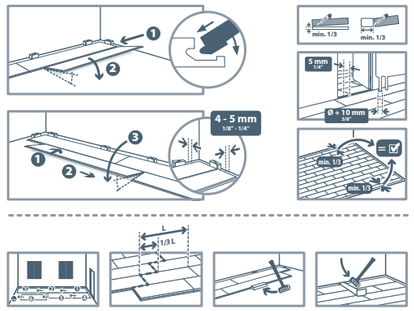

4 maintenance



SENSO PREMIUM CLIC

Cleaning - see page 65

See index page 66

NEW

SENSO CLIC

DUO CORE Rigid & Comfort

Fast & Easy

Direct laying on ceramic
Max 5mm / 2mm

Bay window installation
Max 60°

Traffic resistant

Suitable for wet rooms

Easy cleaning

Guarantee 12 years
Domestic use

MADE IN FRANCE

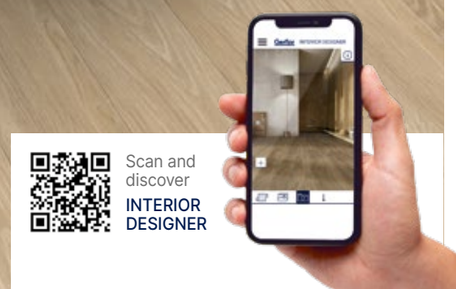

NEW

LVT Interlocking Planks

Class.23/31

0286 - Coton Oak

1-Pecan Light
Size: 123.9 × 21.2 cm
Code: 6097 1300 - EAN: 3475710600036

2-Coton Oak
Size: 123.9 × 21.2 cm
Code: 6097 0286 - EAN: 3475710599958

3-Tacana Grey
Size: 123.9 × 21.2 cm
Code: 6097 1173 - EAN: 3475710599996

4-Pecan
Size: 123.9 × 21.2 cm
Code: 6097 0511 - EAN: 3475710569371

5-Columbia Pearl
Size: 123.9 × 21.2 cm
Code: 6097 0954 - EAN: 3475710599972

6-Pecan Nature
Size: 123.9 × 21.2 cm
Code: 6097 0950 - EAN: 3475710599965

7-Simba Nature
Size: 123.9 × 21.2 cm
Code: 6097 1028 - EAN: 3475710599989

8-Lord Honey
Size: 123.9 × 21.2 cm
Code: 6097 0955 - EAN: 3475710569388

9-Tacana Blond
Size: 123.9 × 21.2 cm
Code: 6097 1174 - EAN: 3475710600012

10-Makonde
Size: 123.9 × 21.2 cm
Code: 6097 1248 - EAN: 3475710600029

0950 - Pecan Nature

NEW

1183 - Petra Black

LVT Interlocking Tiles

Class.23/31

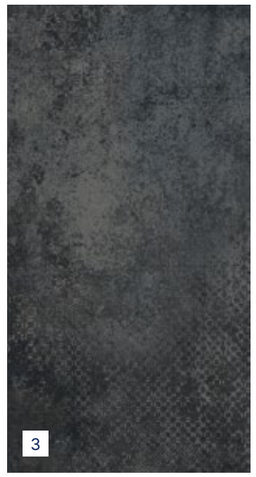

1-Pepper Light
Size: 72.9 × 38.9 cm
Code: 6098 0890 - EAN: 3475710600166

2-Pepper Taupe
Size: 72.9 × 38.9 cm
Code: 6098 0889 - EAN: 3475710600173

3-Petra Black
Size: 72.9 × 38.9 cm
Code: 6098 1183 - EAN: 3475710600203

4-Petra Beige
Size: 72.9 × 38.9 cm
Code: 6098 1182 - EAN: 3475710600197

5-Kandy Clear
Size: 72.9 × 38.9 cm
Code: 6098 1247 - EAN: 3475710600210

6-Kandy Grey
Size: 72.9 × 38.9 cm
Code: 6098 1246 - EAN: 3475710600180

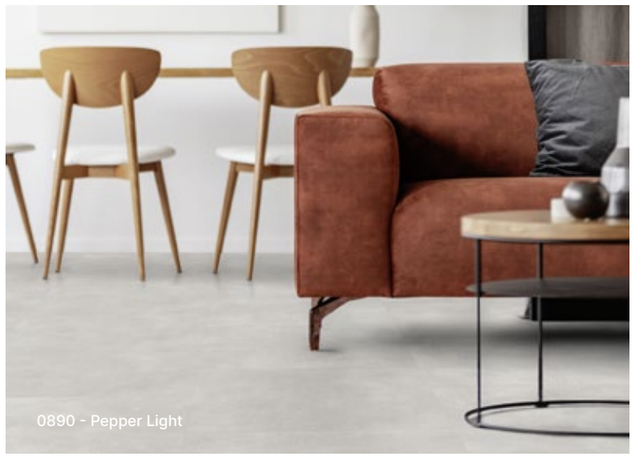

0890 - Pepper Light

Technical Characteristics

Description				
Total thickness	EN ISO 24346	mm	4.20	
Thickness of wearlayer	EN ISO 24340	mm	0.30	
Weight: Mass per unit area	EN ISO 23997	g/sqm	7100	
Size	EN ISO 24342	cm	planks: 21.2 × 123.88	tiles: 38.88 × 72.87
Number of planks / tiles and sqm per box	-	planks / tiles	8 planks / 2.10 sqm	7 tiles / 1.98 sqm
Classification				
Norm / Product specification	-	-	EN ISO 10582	
European classification	EN ISO 10874	class	23/31	
Fire rating - Classification	EN 13501-1	class	B_{fl}-s1	
Static electrical propensity	EN 1815	kV	< 2	
Slip resistance wet: ramp test with oil	DIN 51130	class	R10	
Performance				
Wear resistance	EN 660.2	mm^3	< 2.0	
Wear group	-	group	T	
Type binder content	ISO 10582	type	I	
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.15	
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	
Sound insulation	EN ISO 717-2	dB	4	
Room impact noise	NF S 31074	dB	78	
Castor chair test (Type W)	ISO 4918	-	OK	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	
Chemical products resistance	EN ISO 26987	class	OK	
Surface treatment	-	-	Pureclean +	
Guarantee for residential use	-	year	12	
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m^3	< 10	
CE Marking				
CE	EN 14041			

Areas of use: domestic use

Composition 100 % REACH
Phtalate free (except recycled content)

REACH

AFAQ ISO 9001 VERSION 2008 ISO 14001

HEALTH

TVOC < 10 µg/m^3 after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission
- No glue

ENVIRONMENT

- ISO 14001
- Soapy water cleaning

Scan and discover
The complete range

Laying

1 *important*

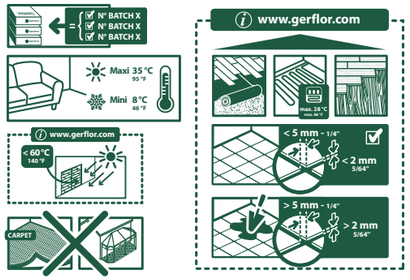

2 *preparation*

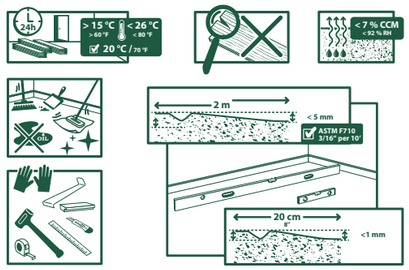

3 *installation*

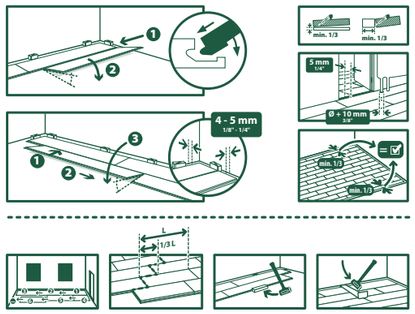

4 *maintenance*



Cleaning - see page 65

SENSO CLIC

See index page 66

SENSO 20 LOCK

Click...
It's Done!

Quick & easy installation
No glue / Can be trimmed with an utility knife

Resistant
Shock-resistant varnish

Rigid structure

Suitable for wet rooms
Watertight and slip-resistant

Guarantee 10 years
Domestic use

1-Brickell Dark
Size: 60.2 × 29.8 cm
Code: 3667 1119 - EAN: 3475710445477

2-Tuscan
Size: 60.2 × 29.8 cm
Code: 3667 1090 - EAN: 3475710445422

3-Brickell Grey
Size: 60.2 × 29.8 cm
Code: 3667 1099 - EAN: 3475710445460

4-Dew Beige
Size: 121 × 17.7 cm
Code: 3668 1091 - EAN: 3475710445439

5-Lumber Taupe
Size: 121 × 17.7 cm
Code: 3668 1095 - EAN: 3475710445521

6-Lumber Fauve
Size: 121 × 17.7 cm
Code: 3668 1096 - EAN: 3475710445538

7-Lumber Grey
Size: 121 × 17.7 cm
Code: 3668 1097 - EAN: 3475710445545

8-Cashew Clear
Size: 121 × 17.7 cm
Code: 3668 1093 - EAN: 3475710445507

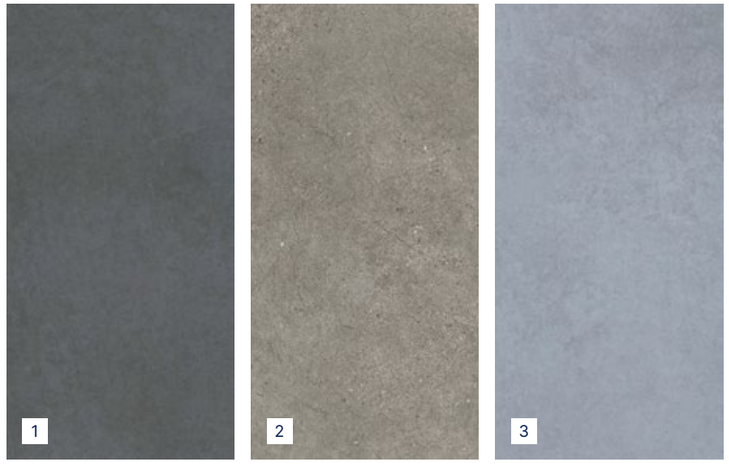

Technical Characteristics

Description				
Total thickness	EN ISO 24346	mm	3.40	
Thickness of wearlayer	EN ISO 24340	mm	0.20	
Weight	EN ISO 23997	g/sqm	6360	
Size	EN ISO 24342	cm	planks: 17.7 × 121	tiles: 29.8 × 60.2
Number of planks / tiles and sqm per box	-	planks /tiles	9 planks / 1.93 sqm	11 tiles / 1.97 sqm
Classification				
Norm / Product specification	-	-	EN ISO 10582	
European classification	EN ISO 10874	class	22	
Fire rating - Classification	EN 13501-1	class	B_{fl}-s1	
Static electrical propensity	EN 1815	kV	< 2	
Performance				
Wear group	-	group	T	
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.15	
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	
Sound insulation	EN ISO 717-2	dB	3	
Room impact noise	NF S 31074	dB	78	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	
Chemical products resistance	EN ISO 26987	class	OK	
Surface treatment	-	-	PUR+	
Guarantee for residential use	-	year	10	
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	
CE Marking				
CE	EN 14041	-	Bfl-s1 DS	

Areas of use: domestic use

Composition 100 % REACH Phtalate free

REACH

ISO 9001 VERSION 2008 ISO 14001

HEALTH

TVOC < 100 µg/m³ after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission
- No glue

ENVIRONMENT

- ISO 14001
- Soapy water cleaning

Scan and discover
The complete range

Laying

1 important

www.gerflor.com

2 preparation

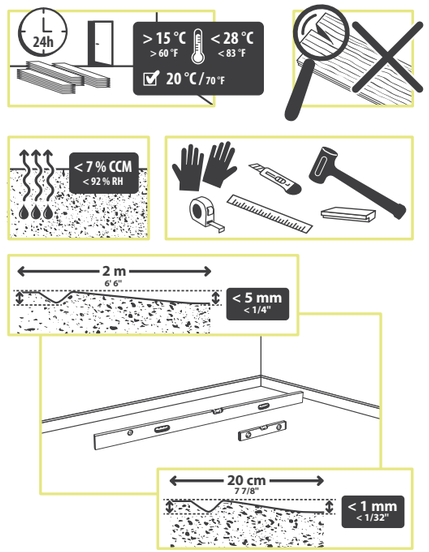

3 installation

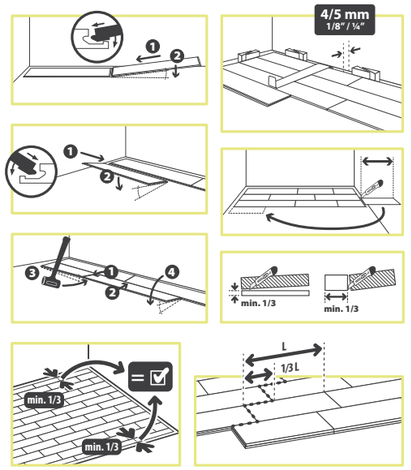

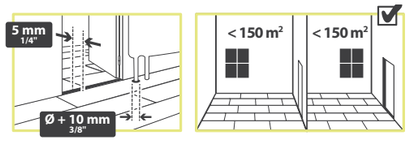

4 maintenance

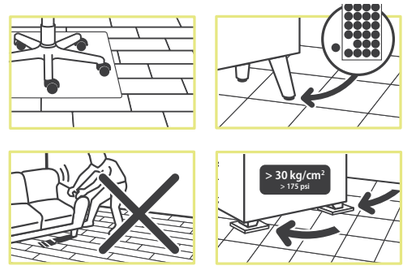

www.gerflor.com

Cleaning - see page 65

See index page 66

SENSO EASY

PREMIUM

Looselay

no clic no glue

Reinforced structure

Direct laying on ceramic

Leaves the subfloor intact

Easy mix and match

No dilatation

Suitable for wet rooms

Guarantee 15 years
Domestic use



Scan and discover
INTERIOR DESIGNER

1034 - Cordoba Black / 0780 - Flagstone Dark

1-Simba Grey
Size: 121.9 × 18.4 cm
Code: 3617 0888 - EAN: 3475710439476

2-Hella White
Size: 121.9 × 18.4 cm
Code: 3617 0035 - EAN: 3475710438035

3-Rosebud Pearl
Size: 121.9 × 18.4 cm
Code: 3617 0506 - EAN: 3475710438004

4-Lord Light
Size: 121.9 × 18.4 cm
Code: 3617 1027 - EAN: 3475710438042

5-Puzzle
Size: 121.9 × 18.4 cm
Code: 3617 0385 - EAN: 3475710438011

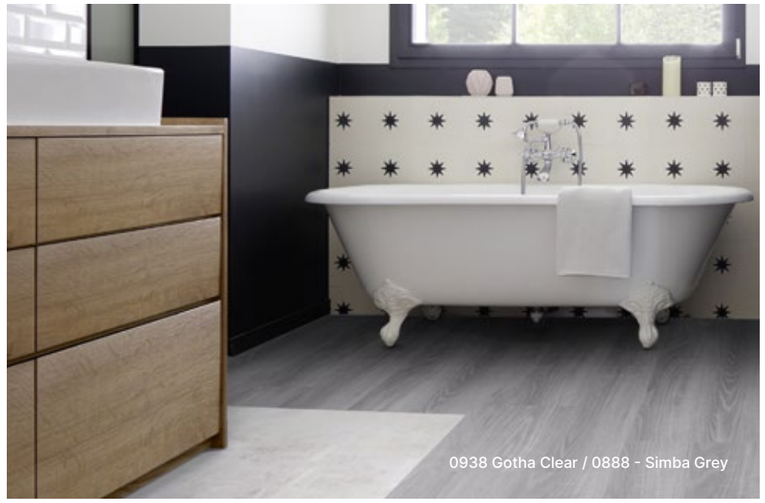
0938 Gotha Clear / 0888 - Simba Grey

1-Cordoba Black
Size: 61 × 61 cm
Code: 3618 1034 - EAN: 3475710438271

2-Cordoba Ivory
Size: 61 × 61 cm
Code: 3618 1033 - EAN: 3475710438264

3-Provence Blue
Size: 61 × 61 cm
Code: 3618 0917 - EAN: 3475710438240

4-Provence Ivory
Size: 61 × 61 cm
Code: 3618 1032 - EAN: 3475710438257

5-Flagstone Dark
Size: 61 × 30.5 cm
Code: 3616 0780 - EAN: 3475710439421

6-Wallstreet Light
Size: 61 × 30.5 cm
Code: 3616 0702 - EAN: 3475710439438

7-Gotha Clear
Size: 61 × 30.5 cm
Code: 3616 0938 - EAN: 3475710439414



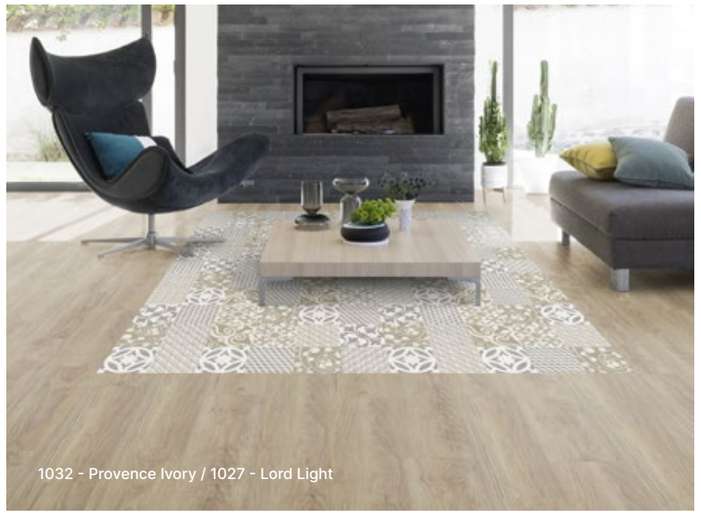
1032 - Provence Ivory / 1027 - Lord Light



Technical Characteristics

Description					
Total thickness	EN ISO 24346	mm	4.0		
Thickness of wearlayer	EN ISO 24340	mm	0.55		
Weight: Mass per unit area	EN ISO 23997	g/sqm	7200		
Size	EN ISO 24342	cm	planks: 18.4 × 121.9	tiles: 30.5 × 61	tiles: 61 × 61
Number of planks / tiles and sqm per box	-	planks / tiles	8 planks / 1.79 sqm	10 tiles / 1.86 sqm	4 tiles / 1.49 sqm
Classification					
Norm / Product specification	-	-	EN ISO 10582		
European classification	EN ISO 10874	class	33/42		
Fire rating - Classification	EN 13501-1	class	B_{fl}-s1		
Static electrical propensity	EN 1815	kV	< 2		
Slip resistance wet: ramp test with oil	DIN 51130	class	R9		
Performance					
Wear group	EN 649	group	T		
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.15		
Residual indentation	EN ISO 24343-1	mm	≤ 0.10		
Sound insulation	EN ISO 717-2	dB	4		
Room impact noise	NF S 31074	dB	75		
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25		
Colour fastness	EN 20 105 - B02	degree	≥ 6		
Surface treatment	-	-	PUR+ Matt		
Guarantee for residential use	-	year	15		
Environment / Indoor Air Quality					
TVOC after 28 days	ISO 16000-6	µg/m³	< 100		
CE MARKING					
CE	EN 14041	-	B_{fl}-s1		

Areas of use: domestic use

Composition
100 % REACH
Phtalate free

REACH

AFAQ ISO 9001 VERSION 2008 ISO 14001

HEALTH

TVOC < 100 µg/m³
after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission
- No glue

ENVIRONMENT

- ISO 14001
- Soapy water cleaning

Scan and discover
The complete range

Laying

1 important

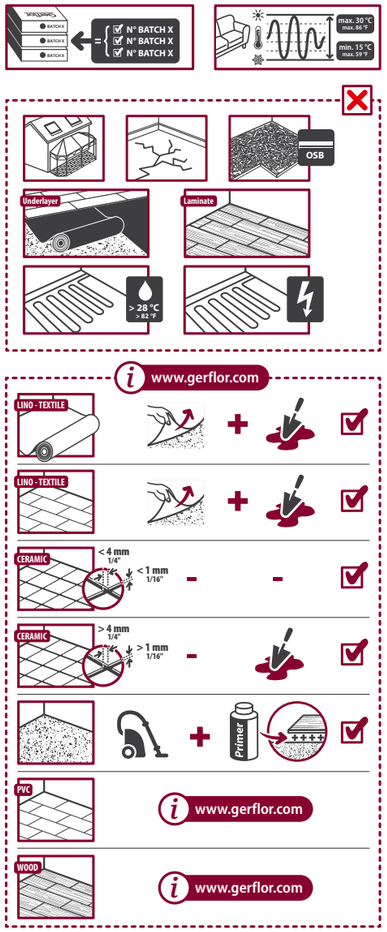

2 preparation

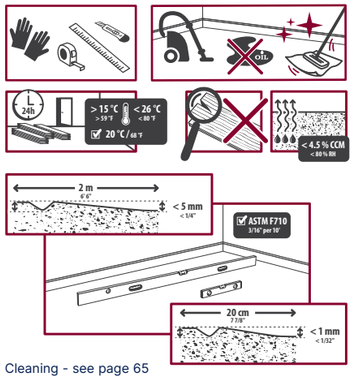

Cleaning - see page 65

3 installation

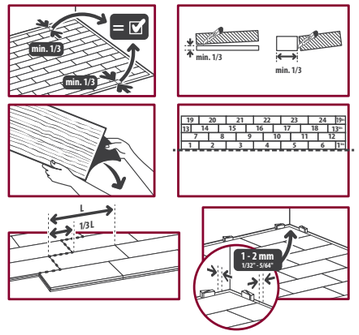

4 maintenance

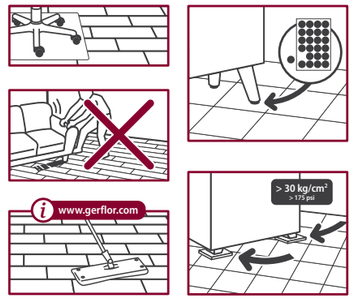

See index page 66

SENSO
SELF-ADHESIVE

PREMIUM

Simply the best for your floor

Ultra steady - Ultra resistant
Ultra easy

Reinforced structure

No gap

Reinforced adhesive

Resistant

No dilatation

Easy cleaning

Guarantee 12 years
Domestic use

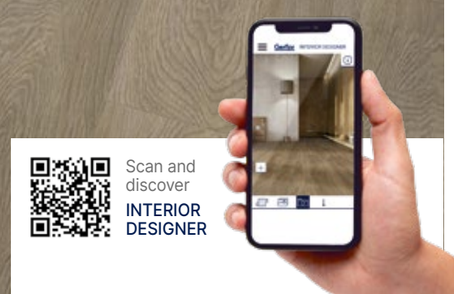

1303 - Alta Skin

1

2

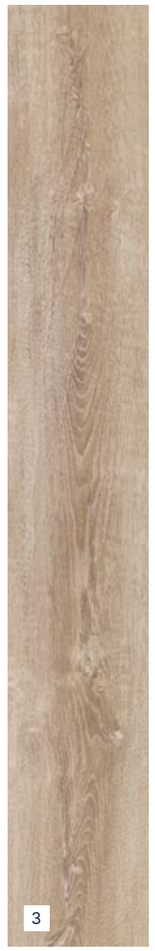
3

4

5

6

Synchronised emboss | Synchronised emboss | Synchronised emboss

7


8

9

Registred cutting

10

Registred cutting

11

12

1034 - Cordoba Black

1-Balade Honey
Size: 121.9 × 18.4 cm
Code: 3579 0909 - EAN: 3475710431401

2-Balade Grey
Size: 121.9 × 18.4 cm
Code: 3579 0910 - EAN: 3475710431418

3-Balade Light
Size: 121.9 × 18.4 cm
Code: 3579 0912 - EAN: 3475710431425

4-Alta Skin
Size: 121.9 × 18.4 cm
Code: 35791303 - EAN: 3475710555282

5-Alta Clear
Size: 121.9 × 18.4 cm
Code: 35791302 - EAN: 3475710555275

6-Simba
Size: 121.9 × 18.4 cm
Code: 3579 0287 - EAN: 3475710428913

7-Pepper Light
Size: 61 × 61 cm
Code: 3578 0890 - EAN: 3475710428876

8-Pepper Taupe
Size: 61 × 61 cm
Code: 3578 0889 - EAN: 3475710428869

9-Provence Gold
Size: 61 × 61 cmm
Code: 3578 0920 - EAN: 3475710431463

10-Provence Grey
Size: 61 × 61 cm
Code: 3578 0919 - EAN: 3475710431456

11-Cordoba Black
Size: 61 × 61 cm
Code: 3578 1034 - EAN: 3475710551543

12-Cordoba Ivory
Size: 61 × 61 cm
Code: 3578 1033 - EAN: 3475710551536



Technical Characteristics

Description				
Total thickness	EN ISO 24346	mm	2.50	
Thickness of wearlayer	EN ISO 24340	mm	0.30	
Weight: mass per unit area	EN ISO 23997	g/sqm	4660	
Size	EN ISO 24342	cm	planks: 121.9 × 18.4	tiles: 61 × 61
Number of planks / tiles and sqm per box	EN ISO 24342	planks / tiles	11 planks / 2.47 sqm	7 tiles / 2.60 sqm
Classification				
Norm / Product specification	-	-	EN ISO 10582	
European classification	EN ISO 10874	class	23/31	
Fire rating - Classification	EN 13501-1	class	B_{fl}-s1	
Static electrical propensity	EN 1815	kV	< 2	
Performance				
Wear resistance	EN 660.2	mm^3	< 2.0	
Wear group	EN 649	group	T	
Type binder content	ISO 10582	type	I	
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.10	
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	
Sound insulation	EN ISO 717-2	dB	5	
Room impact noise	NF S 31074	dB	77	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	
Surface treatment	-	-	PUR+	
Guarantee for residential use	-	year	12	
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m^3	< 100	
CE Marking				
CE	EN 14041	-	B_{fl}-s1 DS	

Areas of use: domestic use

Composition
100 % REACH
Phtalate free

REACH

AFAQ ISO 9001 VERSION 2000 ISO 14001

HEALTH

TVOC < 100 µg/m^3 after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- ISO 14001
- Soapy water cleaning

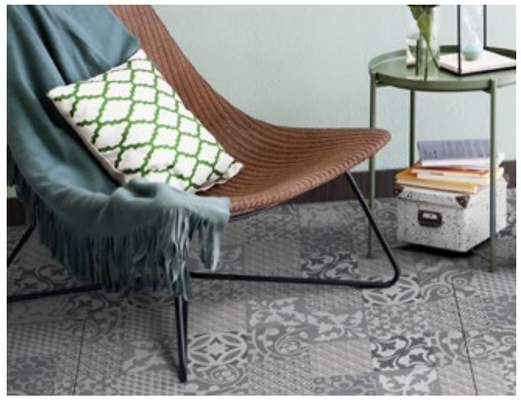

Scan and discover
The complete range

Laying

1 important

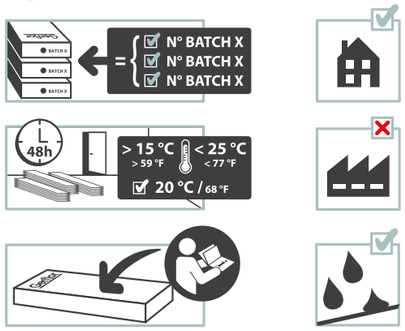

2 preparation

3 installation

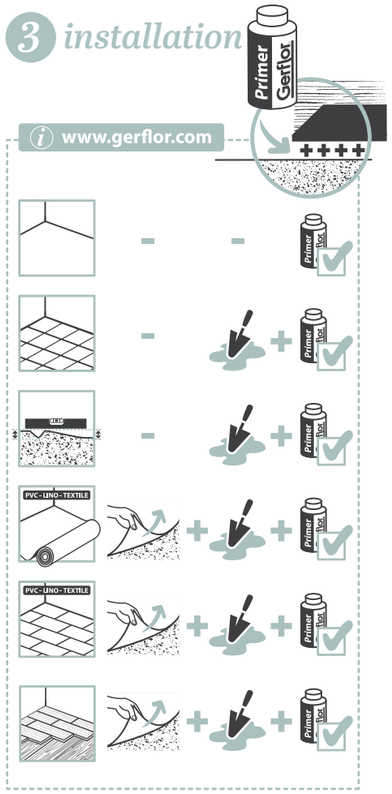

Cleaning - see page 65

4 maintenance

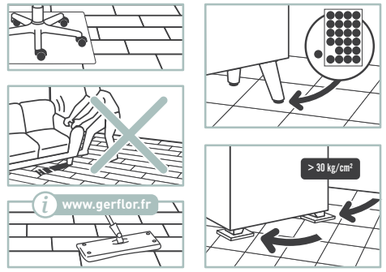

SENSO
SELF-ADHESIVE

PREMIUM

See index page 66

SENSO
SELF-ADHESIVE

Installed quickly
& easily!

Ultra-Realistic
4 bevelled edges
Textured surface

Trendy
3 styles that reflect consumers taste

Quick & Easy Installation
No glue, no joints, no spacers
Can be cut with a utility knife
Dust-free
15 m² (160 sq. ft.) per hour

Resistant

Water Resistant

Guarantee 10 years
Domestic use

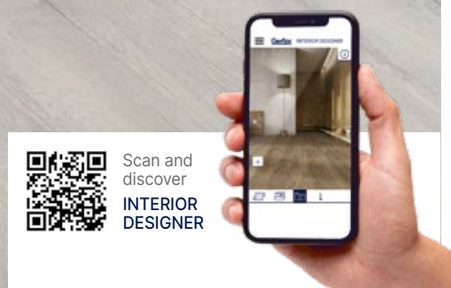

SENSO RUSTIC

LVT Self-Adhesive Planks
Class.22

1014 - Imperial Pearl

1-Imperial Pearl
AS: Size: 91.4 × 15.2 cm
Code: 3325 1014 - EAN: 3475710602320

2-Pecan
BD: Size: 91.4 × 15.2 cm
Code: 3327 0511 - EAN: 3475710250385

3-White Pecan
AS: Size: 91.4 × 15.2 cm
Code: 3325 0394 - EAN: 3475710304651

4-Kola
AS: Size: 91.4 × 15.2 cm
Code: 3325 0309 - EAN: 3475710247538

5-Muscade
BD: Size: 91.4 × 15.2 cm
Code: 3327 0306 - EAN: 3475710250408

6-Noisette
BD: Size: 91.4 × 15.2 cm
Code: 3327 0311 - EAN: 3475710250392

7-Cleveland Dark
VS: Size: 91.4 × 15.2 cm
Code: 3325 0728 - EAN: 3475710606106

0728 - Cleveland Dark

SENSO NATURAL

1-Sunny Light
VS: Size: 91.4 × 15.2 cm
Code: 3280 0996 - EAN: 3475710551550

2-Columbia
VS: Size: 91.4 × 15.2 cm
Code: 3280 0347 - EAN: 3475710391088

3-Noyer Naturel
VS: Size: 91.4 × 15.2 cm
Code: 3280 0018 - EAN: 3475710235238

4-Authentic Nature
VS: Size: 91.4 × 15.2 cm
Code: 3280 0577 - EAN: 3475710602122

5-Travertin
VS: Size: 30.5 × 60.9 cm
Code: 3374 0201 - EAN: 3475710320385

6-Night Slate
VS: Size: 30.5 × 60.9 cm
Code: 3374 0397 - EAN: 3475710319419

0577 - Authentic Nature

5

0201 - Travertin

0397 - Night Slate

6



SENSO URBAN

LVT Self-Adhesive Planks & Tiles
Class.22

0301 - Ceruse Blanc

1

2

1-Ceruse Blanc
VS: Size: 91.4 × 15.2 cm
Code: 3326 0301 - EAN: 3475710247897

2-Wallstreet Light
Size: 30.5 × 60.9 cm
Code: 3375 0702 - EAN: 3475710391095



Technical Characteristics

			PLANKS	TILES
Description				
Total thickness	EN ISO 24346	mm	2.00	2.00
Thickness of wearlayer	EN ISO 24340	mm	0.20	0.20
Weight: mass per unit area	EN ISO 23997	g/sqm	3920	3425
Size	EN ISO 24342	cm	planks: 91.4 × 15.2	tiles: 30.5 × 60.9
Number of planks / tiles and sqm per box	-	planks / tiles	16 planks / 2.20 sqm	12 tiles / 2.22 sqm
Classification				
Norm / Product specification	-	ISO 10582	ISO 10582	ISO 10582
European classification	EN ISO 10874	class	22	22
Fire rating - Classification	EN 13501-1	class	Bfl S1	Bfl S1
Static electrical propersity	EN 1815	-	< 2 kV	< 2 kV
Slip resistance wet: ramp test with oil	DIN 51130	class	R9	R9
Performance				
Wear group	EN 649	group	T	T
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.25	≤ 0.25
Residual Indentation	EN ISO 24343-1	mm	0.05	0.05
Impact sound insulation	EN ISO 717-2	dB	3	3
Room impact noise	NF S 31074	class	C	C
Thermal conductivity	EN ISO 10456	W(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR	PUR
Garantee for residential use	-	year	10	10
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	< 100
VOC rating (French norm)	-	-	A+	A+
CE Marking				
CE	EN 14041		Bfl-s1	

Areas of use: domestic use

Composition 100 % REACH Phtalate free

REACH

AFAQ ISO 9001 VERSION 2008 ISO 14001

HEALTH

TVOC < 100 µg/m³ after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- ISO 14001
- Soapy water cleaning

Scan and discover
The complete range

Laying

1 important

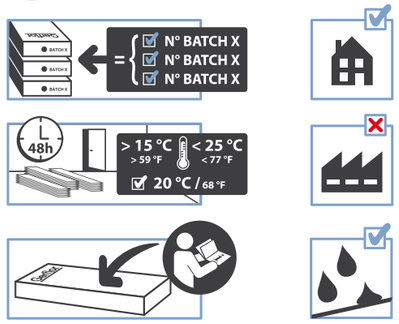

2 preparation

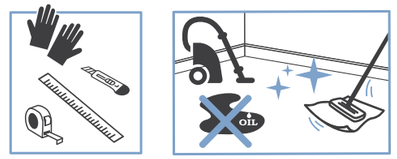

3 installation

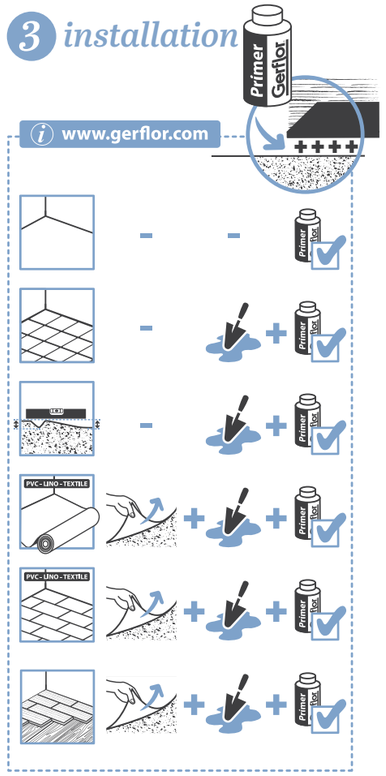

Cleaning - see page 65

4 maintenance

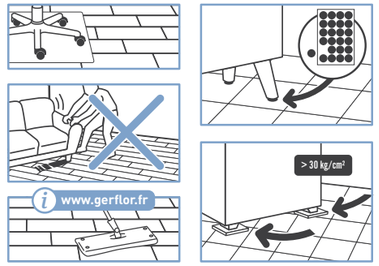

SENSO SELF-ADHESIVE

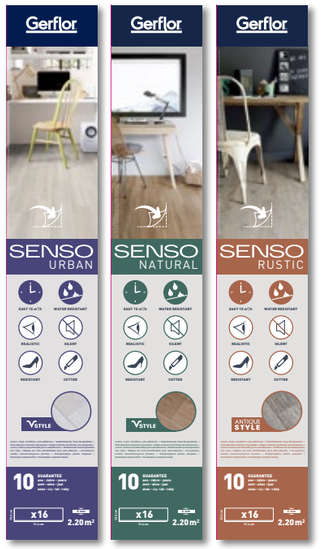

See index page 66

Vinyl tiles
SELF-ADHESIVES

Decorative
2 styles that reflect consumer tastes

Eco-Friendly
Garanteed lead-free
and formaldehyde-free

Compact
Exclusive underlayer for
long-lasting stability

0135 - Marble Beige

Design

1-White Tile
Size: 30.5 × 30.5 cm
Code: 3237 0224 - EAN: 3475710186844

2-Slate Anthracite
Size: 30.5 × 30.5 cm
Code: 3237 0220 - EAN: 3475710186820

3-Black Tile
Size: 30.5 × 30.5 cm
Code: 3237 0221 - EAN: 3475710186837





Prime

4-Granite Grey
Size: 30.5 × 30.5 cm
Code: 4556 0130 - EAN: 3475710099380

5-Marble Beige
Size: 30.5 × 30.5 cm
Code: 4556 0135 - EAN: 3475710099410

6-Wood Clear
Size: 30.5 × 30.5 cm
Code: 4556 0139 - EAN: 3475710099434

Technical Characteristics

			DESIGN	PRIME
Description				
Total thickness	EN ISO 24346	mm	1.50	1.30
Thickness of wearlayer	EN ISO 24340	mm	0.08	0.08
Weight: Mass per unit area	EN ISO 23997	g/sqm	2550	2190
Size	EN ISO 24342	cm	tiles: 30.5 × 30.5	tiles: 30.5 × 30.5
Number of planks / tiles and sqm per box	-	tiles	11 tiles / 1 sqm	11 tiles / 1 sqm
Classification				
Norm / Product specification	-	ISO 10582	ISO 10582	ISO 10582
European classification	EN ISO 10874	class	22	22
Fire rating - Classification	EN 13501-1	class	Bfl S1	Bfl S1
Static electrical propersity	EN 1815	-	< 2 kV	< 2 kV
Slip resistance wet: ramp test with oil	DIN 51130	class	R9 / R10	R9 / R10
Performance				
Wear group	EN 649	group	T	T
Dimensional stability after exposure to heat	EN ISO 23999	%	< 0.40	< 0.40
Residual Indentation	EN ISO 24343-1	mm	0.04	0.04
Impact sound insulation	EN ISO 717-2	dB	3	3
Room impact noise	NF S 31074	class	C	C
Thermal conductivity	EN ISO 10456	W(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Garantee for residential use	-	year	7	3
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	< 100
VOC rating (French norm)	-	-	A+	A+
CE Marking				
CE	EN 14041		Bfl-s1	

Areas of use: domestic use

Composition 100 % REACH Phtalate free

REACH

AFAQ ISO 9001 VERSION 2008 ISO 14001

HEALTH

TVOC < 100 µg/m³ after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- ISO 14001
- Soapy water cleaning

DESIGN

PRIME

Scan and discover
The complete range

Laying

Installation by subfloor type

SMOOTH

Smooth cement that is clean and dry, seamless tiles, liquid screed = can be installed directly

UNEVEN

Cement, floorboards, tiles

- Securing of loose/exposed parts
- Resurfacing required (wood fibres)
- Sanding

SOFT and LOOSE LAY

Carpet, vinyl, linoleum, laminate

- Removal of old subfloor and underlayer
- Resurfacing
- Sanding

IMPOSSIBLE CASES

Heated floor if > 28°C and/or reversible, oriented strand board (OSB), verandas, cracked floors, humidity buildup

TIP

For better adherence, apply Gerflor primer after the subfloor has been sanded, cleaned and vacuumed, before installing the tiles or planks

STEP-BY-STEP

1-You will need a utility knife, ruler and tape measure
2- Start at the centre of the piece
3- Follow the instructions on the back
4- Remove protective covering
5- Position the piece and press down

TO REPLACE A TILE OR PLANK

- With a utility knife, pierce the tile or plank several times
- Heat it with a blow dryer to soften it
- Remove and replace it

See index page 66

How to care
For your Gerflor floor

SAFETY TIPS

- Use plastic coasters or felt pads under the feet of furniture and other heavy objects.
- Protect from sources of heat and spills.

CLEANING

Regular cleaning: use a vacuum and a damp mop with a standard, no-rinse detergent solution.
Gerflor recommends using its Power Cleaner for routine cleaning.

Deep cleaning (every 6-12 months): to make your floor shine like new again, use a restorative product.
Gerflor recommends using its Renovator Polish to protect and enhance the look of your floor.
It leaves a matte finish and brightens up colours.

Stubborn stains: use diluted bleach, white spirit, alcohol or lemon juice.

- Stains such as tomato sauce, mustard, beet juice, blood, ink and iodine: use diluted bleach, allowing it to sit for several minutes and then rinsing thoroughly.
- Rust stains: clean with fabric rust remover and rinse thoroughly.
- Marker, pen, grease and glue stains: rub gently with a cloth moistened with white spirit, and rinse thoroughly.

Products to avoid: acetone, chlorinated solvents such as trichlorethylene, wax, glaze.

LVT Numerical Index

Color Code	Design Color	Type	Size mm	Range	Page
60530829	AUTHENTIC BLOND	PLANK	1239 × 212	SENSO PREMIUM CLIC	19
60530828	AUTHENTIC NATURE	PLANK	1239 × 212	SENSO PREMIUM CLIC	20
60530728	CLEVELAND DARK	PLANK	1239 × 212	SENSO PREMIUM CLIC	20
60530837	COLUMBIA	PLANK	1239 × 212	SENSO PREMIUM CLIC	19
60530953	COLUMBIA TAUPE	PLANK	1239 × 212	SENSO PREMIUM CLIC	20
60510938	GOTHA CLEAR	TILE	729 × 389	SENSO PREMIUM CLIC	23
60531298	GREENLAND GREY	PLANK	1239 × 212	SENSO PREMIUM CLIC	19
60531299	GREENLAND LIGHT	PLANK	1239 × 212	SENSO PREMIUM CLIC	19
60510819	INDUSTRY	TILE	729 × 389	SENSO PREMIUM CLIC	23
60521213	KARIBA BLOND	PLANK	1461 × 240	SENSO PREMIUM CLIC	22
60521195	KARIBA DARK	PLANK	1461 × 240	SENSO PREMIUM CLIC	22
60521196	KARIBA TAUPE	PLANK	1461 × 240	SENSO PREMIUM CLIC	22
60530309	KOLA	PLANK	1239 × 212	SENSO PREMIUM CLIC	19
60510826	MANHATTAN CLEAR	TILE	729 × 389	SENSO PREMIUM CLIC	23
60530511	PECAN	PLANK	1239 × 212	SENSO PREMIUM CLIC	19
60531207	PORTREE LIGHT	PLANK	1239 × 212	SENSO PREMIUM CLIC	20
60511205	SHALE BEIGE	TILE	729 × 389	SENSO PREMIUM CLIC	23
60511297	SHALE BLACK	TILE	729 × 389	SENSO PREMIUM CLIC	23
60530286	SUNNY WHITE	PLANK	1239 × 212	SENSO PREMIUM CLIC	19
60511184	VILLA BEIGE	TILE	729 × 389	SENSO PREMIUM CLIC	23
60970954	COLUMBIA PEARL	PLANK	1239 × 212	SENSO CLIC	29
60970286	COTON OAK	PLANK	1239 × 212	SENSO CLIC	28
60981247	KANDY CLEAR	TILE	729 × 389	SENSO CLIC	31
60981246	KANDY GREY	TILE	729 × 389	SENSO CLIC	31
60970955	LORD HONEY	PLANK	1239 × 212	SENSO CLIC	29
60971248	MAKONDE	PLANK	1239 × 212	SENSO CLIC	29
60970511	PECAN	PLANK	1239 × 212	SENSO CLIC	29
60971300	PECAN LIGHT	PLANK	1239 × 212	SENSO CLIC	28
60970950	PECAN NATURE	PLANK	1239 × 212	SENSO CLIC	29
60980890	PEPPER LIGHT	TILE	729 × 389	SENSO CLIC	31
60980889	PEPPER TAUPE	TILE	729 × 389	SENSO CLIC	31
60981182	PETRA BEIGE	TILE	729 × 389	SENSO CLIC	31
60981183	PETRA BLACK	TILE	729 × 389	SENSO CLIC	31
60971028	SIMBA NATURE	PLANK	1239 × 212	SENSO CLIC	29
60971174	TACANA BLOND	PLANK	1239 × 212	SENSO CLIC	29
60971173	TACANA GREY	PLANK	1239 × 212	SENSO CLIC	28
36671119	BRICKELL DARK	TILE	298 × 602	SENSO 20 LOCK	36
36671099	BRICKELL GREY	TILE	298 × 602	SENSO 20 LOCK	36
36681093	CASHEW CLEAR	PLANK	177 × 1210	SENSO 20 LOCK	37
36681091	DEW BEIGE	PLANK	177 × 1210	SENSO 20 LOCK	37
36681096	LUMBER FAUVE	PLANK	177 × 1210	SENSO 20 LOCK	37
36681097	LUMBER GREY	PLANK	177 × 1210	SENSO 20 LOCK	37
36681095	LUMBER TAUPE	PLANK	177 × 1210	SENSO 20 LOCK	37
36671090	TUSCAN	TILE	298 × 602	SENSO 20 LOCK	36
36181034	CORDOBA BLACK	TILE	610 × 610	SENSO PREMIUM EASY	43
36181033	CORDOBA IVORY	TILE	610 × 610	SENSO PREMIUM EASY	43
36160780	FLAGSTONE DARK	TILE	305 × 610	SENSO PREMIUM EASY	43
36160938	GOTHA CLEAR	TILE	305 × 610	SENSO PREMIUM EASY	43
36170035	HELLA WHITE	PLANK	184 × 1219	SENSO PREMIUM EASY	42
36171027	LORD LIGHT	PLANK	184 × 1219	SENSO PREMIUM EASY	42
36180917	PROVENCE BLUE	TILE	610 × 610	SENSO PREMIUM EASY	43
36181032	PROVENCE IVORY	TILE	610 × 610	SENSO PREMIUM EASY	43
36170385	PUZZLE	PLANK	184 × 1219	SENSO PREMIUM EASY	42
36170506	ROSEBUD PEARL	PLANK	184 × 1219	SENSO PREMIUM EASY	42
36170888	SYMBA GREY	PLANK	184 × 1219	SENSO PREMIUM EASY	42
36160702	WALLSTREET LIGHT	TILE	305 × 610	SENSO PREMIUM EASY	43
35791302	ALTA CLEAR	PLANK	1219 × 184	SENSO SELF ADHESIVE PREMIUM	48
35791303	ALTA SKIN	PLANK	1219 × 184	SENSO SELF ADHESIVE PREMIUM	48
35790910	BALADE GREY	PLANK	1219 × 184	SENSO SELF ADHESIVE PREMIUM	48
35790909	BALADE HONEY	PLANK	1219 × 184	SENSO SELF ADHESIVE PREMIUM	48
35790912	BALADE LIGHT	PLANK	1219 × 184	SENSO SELF ADHESIVE PREMIUM	48
35781034	CORDOBA BLACK	TILE	610 × 610	SENSO SELF ADHESIVE PREMIUM	49
35781033	CORDOBA IVORY	TILE	610 × 610	SENSO SELF ADHESIVE PREMIUM	49
35780890	PEPPER LIGHT	TILE	610 × 610	SENSO SELF ADHESIVE PREMIUM	49
35780889	PEPPER TAUPE	TILE	610 × 610	SENSO SELF ADHESIVE PREMIUM	49
35780920	PROVENCE GOLD	TILE	610 × 610	SENSO SELF ADHESIVE PREMIUM	49
35780919	PROVENCE GREY	TILE	610 × 610	SENSO SELF ADHESIVE PREMIUM	49
35790287	SIMBA	PLANK	1219 × 184	SENSO SELF ADHESIVE PREMIUM	48
32800728	CLEVELAND DARK	PLANK	914 × 152	SENSO RUSTIC	55
33251014	IMPERIAL PEARL	PLANK	914 × 152	SENSO RUSTIC	54
33250309	KOLA	PLANK	914 × 152	SENSO RUSTIC	55
33270306	MUSCADE	PLANK	914 × 152	SENSO RUSTIC	55
33270311	NOISETTE	PLANK	914 × 152	SENSO RUSTIC	55
33270511	PECAN	PLANK	914 × 152	SENSO RUSTIC	55
33250394	WHITE PECAN	PLANK	914 × 152	SENSO RUSTIC	55
32800577	AUTHENTIC NATURE	PLANK	914 × 152	SENSO NATURAL	56
32800347	COLUMBIA	PLANK	914 × 152	SENSO NATURAL	56
33740397	NIGHT SLATE	TILE	609 × 305	SENSO NATURAL	57
32800018	NOYER NATUREL	PLANK	914 × 152	SENSO NATURAL	56
32800996	SUNNY LIGHT	PLANK	914 × 152	SENSO NATURAL	56
33740201	TRAVERTIN	TILE	609 × 305	SENSO NATURAL	57
33260301	CERUSE BLANC	PLANK	914 × 152	SENSO URBAN	59
33750702	WALLSTREET LIGHT	TILE	609 × 305	SENSO URBAN	59
32370221	BLACK TILE	TILE	305 × 305	DESIGN	63
32370220	SLATE ANTHRACITE	TILE	305 × 305	DESIGN	63
32370224	WHITE TILE	TILE	305 × 305	DESIGN	63
45560130	GRANITE GREY	TILE	305 × 305	PRIME	63
45560135	MARBLE BEIGE	TILE	305 × 305	PRIME	63
45560139	WOOD CLEAR	TILE	305 × 305	PRIME	63

Communication Tools

ASIA: Gerflor Asia
Tel: +852 9222 6355 - Fax: +852 3006 1449
e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd
Australia Tel: +61 1 800 060 785
New Zealand Tel: + 64 0 800 630 119
e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH
Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbe@gerflor.com

CANADA: Gerflor International
Tel: +1 438 333 0752 - Fax: +1 438 380 5425
e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd.
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com

CZECH REPUBLIC & SLOVAKIA: Gerflor CZ s.r.o.
Tel: +420 725 815 902

FINLAND: Gerflor Oy
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi

FRANCE: Gerflor
Tel: 00 33 4 75 50 68 68 - Fax: 00 33 4 75 50 69 95
e-mail: serviceconso@gerflor.com

GERMANY: Gerflor Mipolam GmbH
Tel: +49 (0)22 41-25 30-0
e-mail: gerflormipolam@gerflor.com

IRELAND: Gerflor Ltd
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759
e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A.
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina
Tel: +55 11 38 48 20 20
e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East
Tel: +966 3 847 1779 - Fax: +966 3 847 1781
e-mail: info@gerflorme.com

NETHERLANDS: Gerflor Benelux
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflornl@gerflor.com

OTHER COUNTRIES: Gerflor International
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33
e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao
Tel./Fax: + 7 495 785 23 71
e-mail: gerflorrussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s.
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80
e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd
Sample service: Contractuk@gerflor.com
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

USA: Gerflor USA
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com

The flooring in this document is reproduced as accurately as achievable by printing techniques. Information in this document is subject to change.
Photographs: Studio Azimuts, Mouxy Productions, Studio L'Œil Écoute, Studio Nomades, Studio Actimage - Getty image - Betty Studio - Fotolia
Siret (trade register No.): 726 580 152 00098 - Jpe

we **care** / we **act** Our Commitments for a Sustainable future

CARBON FOOTPRINT*
-20 % kg CO_2 equivalent/m² between **2020** and **2025**

BIOSOURCED CONTENT**
10 % by **2025**

RECYCLED CONTENT
30 % by **2025**

ADHESIVE FREE***
35 % by **2025**

ANNUAL VOLUME RECYCLED
60 000 t by **2025**

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution