

CLASSIC IMPERIAL

gerflor.com




Gerflor[®]
theflooringroup

CLASSIC IMPERIAL



 2 m	 608 x 608 mm 300 x 300 mm* (*only 2 mm)	34-43 2 mm	K5 2 mm	PUR 2 mm	23-31 1.5 mm	K3 1.5 mm	 100 % recyclable
--	--	---------------	------------	-------------	-----------------	--------------	--

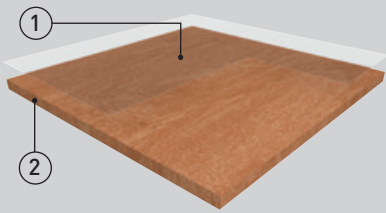

① PUR surface treatment

② Monolayer homogeneous flooring, calendered

- ▶ High performing homogeneous multipurpose flooring suitable for heavy traffic areas.
- ▶ Flexible homogeneous calendered compacted floorcovering available in tiles or sheets.
- ▶ PUR surface treatment: good foundation for routine maintenance and avoids the immediate use of an acrylic emulsion after installation.
- ▶ Directional design.
- ▶ Densely compacted surface for improved wear and ease of maintenance.

CLASSIC IMPERIAL is a flexible monolayer homogeneous calendered flooring in **2m** sheets, with a thickness of **2mm** and a weight of **≤ 3460g**.

The directional design with colour throughout the thickness is available in **20 references**.

This flooring is anti-static (<2kV).

The product is non reactive to residual indentation with a value ≤ 0,03 mm [EN 433].



0004 Clay
NCS: 3020-Y50R / LRV: 39,3



n for routine
allation.
wear rating
µg/m³ (TVOC




0103 White
NCS: 1000-N / LRV: 80,0



0002 Platinum
NCS: 2502-B / LRV: 51,5



0005 Steel
NCS: 3502-B / LRV: 35,2

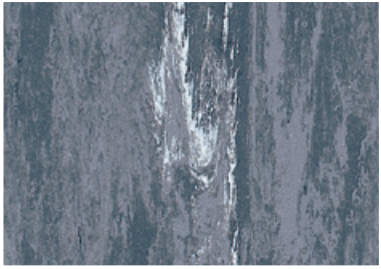

0013 Pewter
NCS: 6005-R80B / LRV: 12,8



0102 Black
NCS: 9000-N / LRV: 5,2



CLASSIC IMPERIAL



0016 Sand
NCS: 1005-Y40R / LRV: 61,6



0003 Ivory
NCS: 2010-Y30R / LRV: 53,9



0109 Sun
NCS: 2040-Y20R / LRV: 43,8




0007 Crocus
NCS: 3020-R70B / LRV: 26,8




0014 Brown
NCS: 4010-Y50R / LRV: 35,6



0006 Honey
NCS: 2010-Y40R / LRV: 46,7

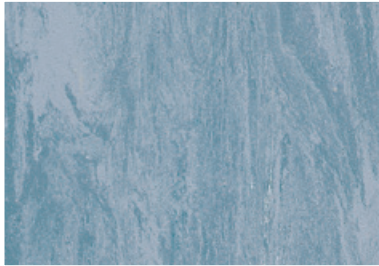


0112 Storm
NCS: 3020-B / LRV: 34,1

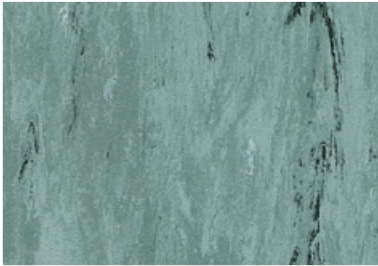

0015 Leaves
NCS: 4010-B70G / LRV: 28,9



0004 Clay
NCS: 3020-Y50R / LRV: 39,3

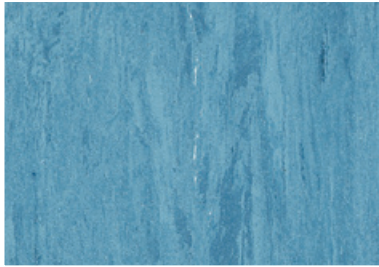


0010 Azure
NCS: 3030-B / LRV: 30,9



0012 Mint
NCS: 3020-B90G / LRV: 34,3



0018 Terra
NCS: 3050-Y60R / LRV: 17,8

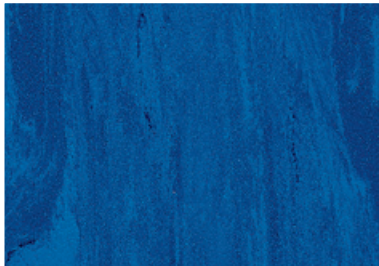

0019 Blue
NCS: 4040-R90B / LRV: 10,7



0020 Forest
NCS: 4040-B70G / LRV: 16,0



0017 Red
NCS: 3050-Y90R / LRV: 12,5



DESCRIPTION / <i>BESCHREIBUNG</i> / DESCRIPTION / <i>BESCHRIJVING</i> / DESCRIPCIÓN / <i>DESCRIÇÃO</i> / DESCRIZIONE			Classic Imperial 1.5 mm	Classic Imperial 2 mm
Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Espessura total</i> / Spessore totale	EN 428	mm	1.5	2.00
	ASTM F386-02	inch	0.06	0.08
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN 430	g/sq.m	2520	3460
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli	EN 426	cm/lm	200 / 20	200 / 20
	-	feet - inch	6'6" / 66'	6'6" / 66'
Coverage / roll	-	sq.ft	430.56	430.56
	-	sq.m	40	40
Tile size / <i>Format Fliesen</i> / Format dalles / <i>Formaat der tegels</i> / Dimensiones de las losetas / <i>Dimensões dos mosaicos</i> / Dimensione delle piastre	EN 427	mm	-	300 x 300 608 x 608
Number of tiles per package / Nombre de dalles par boîte / Aantal tegels per doos / Cantidad de losetas/caja / Quantidade dos mosaicos/caixa / N° piastre per confezione	-	-	-	50 20
CLASSIFICATION / <i>KLASSIFIZIERUNG</i> / CLASSIFICATION / <i>CLASSIFICATIE</i> / CLASIFICACIONES / <i>CLASSIFICAÇÕES</i> / CLASSIFICAZIONI				
Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN 649	EN 649
	ASTM F 1913-04	-	compliant	compliant
European classification / <i>Europäische Klassifizierung</i> / Classement européen / <i>Europese classificatie</i> / Europea / <i>Europeia</i> / Europea	EN 685	class	23-31	34-43
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	EN 13501-1	class	Bfl - s1	Bfl - s1
	ASTM E648-08	class	-	class I
	CAN/ULC S102.2	-	-	-
Static electrical propensity / <i>Begehaufladung</i> / Potentiel de charge / <i>Elektrische eigenschappen</i> / Comportamiento electrostático / <i>Comportamento elettrostatico</i> / Resistenza elettrica	EN 1815	kV	< 2	< 2
PERFORMANCE / <i>TECHNISCHE EIGENSCHAFTEN</i> / PERFORMANCES / <i>TESTRESULTAAT</i> / CUALIDADES TÉCNICAS / <i>PERFORMANCES</i> / CARATTERISTICHE TECNICHE				
Wear resistance / <i>Verschleißverhalten</i> / Résistance à l'usure / <i>Slijtvastheid</i> / Abrasión / <i>Abrasão</i> / Resistenza all'abrasione	EN 660.2	mm³	≤ 15.0	≤ 7.5
Wear group / <i>Verschleißgruppe</i> / Groupe d'abrasion / <i>Groep slijtvastheid</i> / Grupo de abrasión / <i>Grupo de abrasão</i> / Gruppo di abrasione	EN 649	group	F	M
Type binder content / <i>Bindenmittelgehalt</i> / Teneur en agent liant	ISO 10581	Type	II	II
Dimensional stability / <i>Maßstabilität</i> / Stabilité dimensionnelle / <i>Maatvastheid</i> / Estabilidad dimensional / <i>Estabilidade dimensional</i> / Stabilità dimensionale	EN 434	%	Sheet ≤ 0.40	Sheet ≤ 0.40 Tile ≤ 0.25
Residual indentation / <i>Resteindruck</i> / Poinçonnement statique rémanent / <i>Indrukbelasting</i> / Punzonamiento / <i>Punçoamento</i> / Impronta	EN 433	mm	≈ 0.03	≈ 0.03
Thermal conductivity / <i>Wärmeleitfähigkeit</i> / Conductivité thermique / <i>Thermische weerstand</i> / Resistencia térmica / <i>Resistência térmica</i> / Resistenza termica	EN 12 524	W/(m.K)	0.25	0.25
Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 B02	degree	≥ 6	≥ 6
Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN 423	class	OK <i>beständig gegenüber Haushaltschemikalien und nicht färbenden, verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung</i>	
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie	-	-	PUR	PUR
ENVIRONMENT / <i>INDOOR AIR QUALITY</i>				
TVOC after 28 days / <i>TVOC (28 Tage)</i> / TVOC (28 jours) / <i>TVOC (28 dagen)</i> / TVOC (28 dias) / <i>TVOC (28 dias)</i> / TVOC (28 giorni)	ISO 16000-6	µg/m³	< 10	< 10
CE marking / <i>CE Kennzeichnung</i> / Marquage CE / <i>EG-conformiteitsmerk</i> / Marca de conformidad CE / <i>Marca de conformidade CE</i> / Marcatura CE di conformità				
	EN 14041	-	  	
	-	-		

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

No emulsion is required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available from Gerflor.



Gerflor

Don't forget our complementary ranges!


Handrails


Wall Coverings
& Protections


Entrance mats


Skirtings & Profiles