

TARALAY IMPRESSION & UNI

gerflor.com



Gerflor[®]
the flooring group

GERFLOR'S DESIGN WORLD

Colours impact our emotions, appeal to our senses and have a role in our day to day lives. Spaces are transformed when even the most unlikely locations are touched by colour. Over centuries, colour has become a key part of design.

A world without colour is unimaginable!

Step into Gerflor's design world and discover its colourful universe:

Reds evoke drama and passion, and range from dark tones to luxurious crimsons. Their vibrant energy intensifies the most sophisticated and coldest spaces, and their bold character defines and strengthens even the most ordinary areas.



REDS



YELLOWS

Yellows radiate with warmth to brighten dull spaces and exude sensations of well-being. They provide light and inspire invigorating enthusiasm.



ORANGES

Whether bright orange or copper, these tones add cheerful energy to the most austere places.



GREENS

Combining the familiarity of a garden and the freshness of nature, greens provide a welcome escape from the urban jungle. With greens, it's springtime all year round, a sure fire guarantee of a good mood!



EARTH TONES

Soft whites rejuvenate and modernise classic environments. Their light softness recalls times past and their natural and weathered looks inspire an assured confidence. Sandy beiges evoke calm and peace.



BLUES

Sky blue, ocean blue, ice blue the list goes on. The desire for freshness and freedom is one way of working with blue but it also offers the possibility of softness as well as dramatic effects using more relaxing or more exotic hues.


TARALAY IMPRESSION & UNI

- ▶ Healthcare
- ▶ Nursing homes
- ▶ Education
- ▶ Pre-school
- ▶ Housing
- ▶ Offices
- ▶ Hotels



▶ CHROMATICS

Colourful stripes for a contemporary and bold look
Choose between these two popular offers...

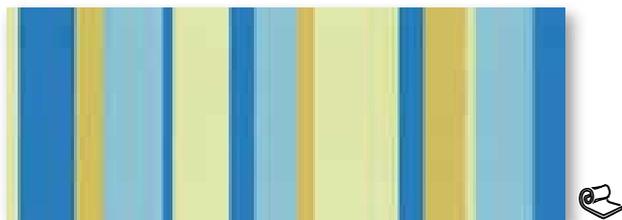

0058 Festival
WR: 0585 0730




0057 Croisette
WR: 0585 0184 / 0585 2946

or let your imagine run free and choose
your own colours

- Choose your 4 colours
A, B, C, D from a NCS
or Pantone colour chart
- Our Design Studio will print
a proposal of your colour
selection
- Your flooring will be produced
with your selected colours

- Colour D
- Colour C
- Colour B
- Colour A

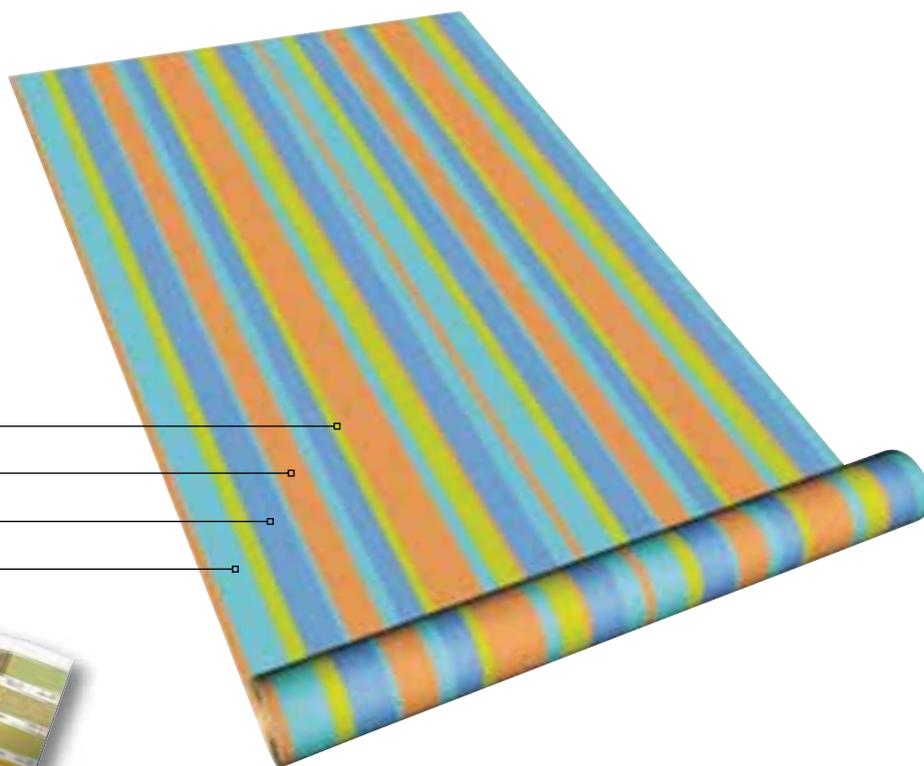

Prices on application -
minimum quantity 600sqm

 Sheet with foam backing (Comfort) - WR: Welding Rods



SAMPLING SERVICE: Call Gerflor to request your samples!

TARALAY IMPRESSION & UNI

▶ UNI



6126 Melon
WR: 0585 0184



6443 Ciel
WR: 0585 0262



6031 Désert
WR: 0585 0110



6605 Blanc
WR: 0585 0030



6130 Potiron
WR: 0585 0465



6450 Océan
WR: 0585 0479



6546 Vert d'eau
WR: 0585 0466



6364 Hoggar
WR: 0585 0153



6115 Piment
WR: 0585 2460



6449 Espace
WR: 0585 0480



6551 Tilleul
WR: 0585 0467



6314 Beige
WR: 0585 0386



6133 Aubergine
WR: 0585 0493




6706 Argent
WR: 0585 0304



6549 Kaki
WR: 0585 0468



6048 Châtaigne
WR: 0585 0462



6750 Alu
WR: 0585 0151



6790 Fog
WR: 0585 0330



▶ DIVERSION



0043 Latérite
WR: 0585 0928



0050 Mandarine
WR: 0585 2121



0044 Baltique
WR: 0585 2194



0052 Aigue Marine
WR: 0585 0262



0054 Cactus
WR: 0585 2192



0053 Blé
WR: 0585 2917



0049 Carbone
WR: 0585 0448



0046 Argile
WR: 0585 0645



0045 Métal
WR: 0585 2125



0047 Ivoire
WR: 0585 0673



▶ OXYGEN



0079 Wind
WR: 0585 0388



0086 Lemon
WR: 0585 2350



0085 Abricot
WR: 0585 2349



0081 Moon
WR: 0585 2347



0082 Biscuit
WR: 0585 0656



0087 Botanic
WR: 0585 2145



0084 Burgundi
WR: 0585 2348



0080 Eclipse
WR: 0585 2143



0083 Brun Choco
WR: 0585 2324



0088 Obscur
WR: 0585 0899

▶ ORGANIC



0071 Basalt
WR: 0585 2227



0070 Pearl
WR: 0585 0807



0072 Candy
WR: 0585 2343



0076 Garden
WR: 0585 2242



0077 Cotton Blue
WR: 0585 2353



0073 Sand
WR: 0585 2344



0074 Carmin
WR: 0585 2345



0078 Indigo
WR: 0585 0823



0075 Corail
WR: 0585 2346

Sheet with foam backing [Comfort] - Sheet without foam backing [Compact] - WR: Welding Rods



SAMPLING SERVICE: Call Gerflor to request your samples!

TARALAY IMPRESSION

▶ PAPYRUS




0002 Thot
WR: 0585 0501



0003 Seth
WR: 0585 0896



0010 Amset
WR: 0585 0257




0013 Gizeh
WR: 0585 0186



0005 Mout
WR: 0585 2919



0001 Sobek
WR: 0585 2920



0011 Nephtys
WR: 0585 2918



0015 Sphinx
WR: 0585 0149



0017 Râ
WR: 0585 2917



0006 Aménophis
WR: 0585 2913



0004 Anta
WR: 0585 0906



0019 Ahmosis
WR: 0585 0544



0009 Bes
WR: 0585 2912



0012 Pharaon
WR: 0585 0169



0018 Khnoum
WR: 0585 2947



▶ URBAN



0038 Pierre
WR: 0585 0645



0031 Bleu
WR: 0585 2189



0032 Aubergine
WR: 0585 2185



0037 Souris
WR: 0585 2190



0034 Safran
WR: 0585 2186



0033 Rouille
WR: 0585 2184



0036 Ciment
WR: 0585 0109



0035 Gris
WR: 0585 0016



0030 Anthracite
WR: 0585 0249



Sheet with foam backing [Comfort] - Sheet without foam backing [Compact] - WR: Welding Rods

ACCESS FOR ALL

TARASTEP



0470 Strada Chanvre
WR: 0585 0318



0471 Strada Ocre
WR: 0585 0832



0463 Strada Safran
WR: 0585 2154



0466 Strada Mastic
WR: 0585 0580



0461 Strada Bleu Acier
WR: 0585 2112



0465 Strada Ciment
WR: 0585 2211



0469 Strada Camel
WR: 0585 2229



Step with foam backing (Comfort)- WR: Welding Rods

Stairs

- The Tarastep range will assist visually impaired people as well as all other users differentiate between the stair riser and step due to the integral colour contrasted stair-nosing.


Signage

- Logos and signs can be embedded into the flooring to accentuate the important elements of the building (reception, lift, stairs...).



Tactile Raised Surface Indicator

- The Gerflor tactile strips** are a recognised solution for visually impaired individuals to help alert them to the proximity of a stairway. The solution provides textured alert which the person can feel through their feet or via a white stick.
- The Gerflor tactile strips** should be located at the approach to an internal stair to alert that there is to be an imminent change to the floor level.
- The Gerflor tactile strips** are manufactured in 3 colours to provide the necessary visual contrast with the surrounding floor.

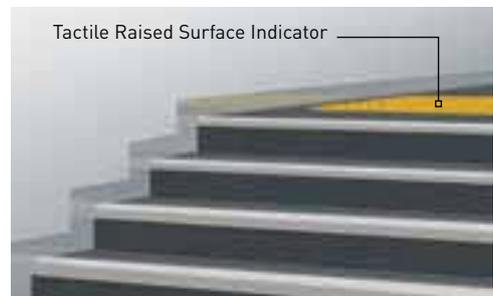

0005 Yellow



0007 Light Grey



0009 Dark Grey




SAMPLING SERVICE: Call Gerflor to request your samples!

TARALAY IMPRESSION





MORE REALISTIC THAN NATURE ITSELF!

As the symbol of strength, security and a connection with nature, wood is the undeniable star of current decorating schemes: Timelessness, strength, comfort and familiarity.

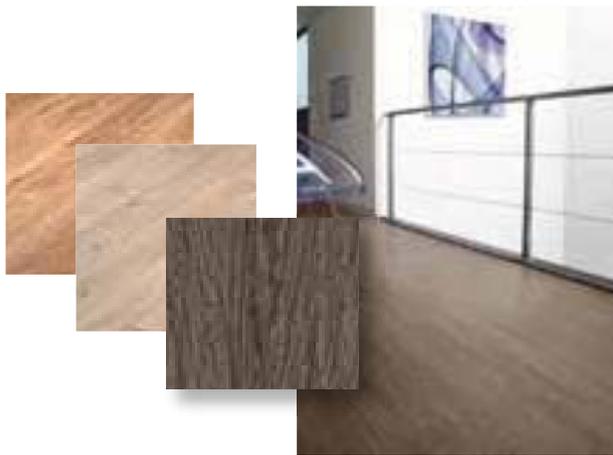

From light, almost white finishes to grey and dark finishes, our new wood designs look mature or weathered under the most extreme conditions. They will add style and warmth to all decorative schemes from the most traditional to the most contemporary.

Authentic, comforting, honey or caramel-coloured natural aspects brighten even the most sober projects.

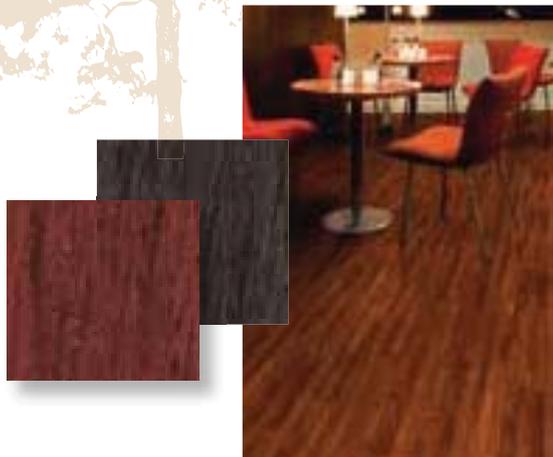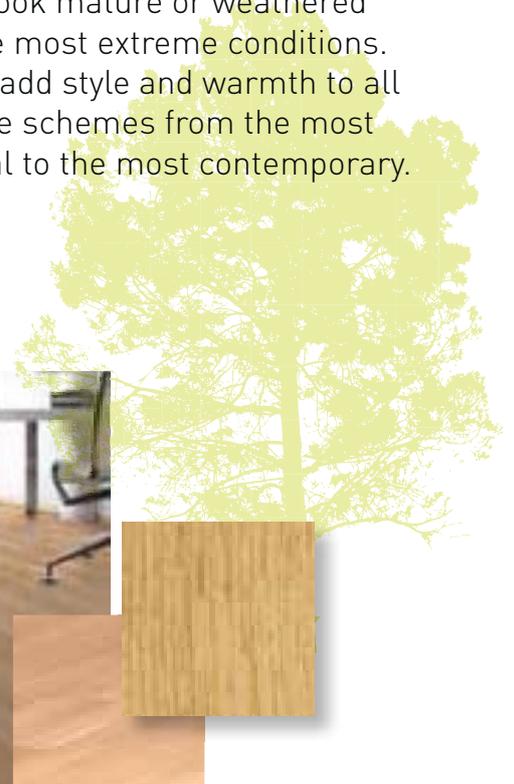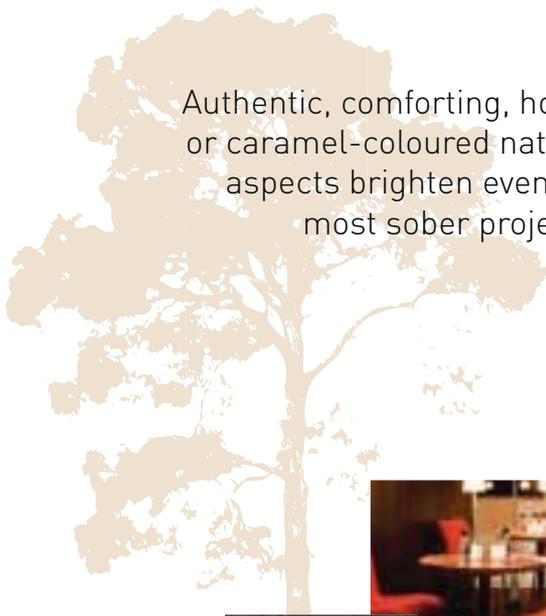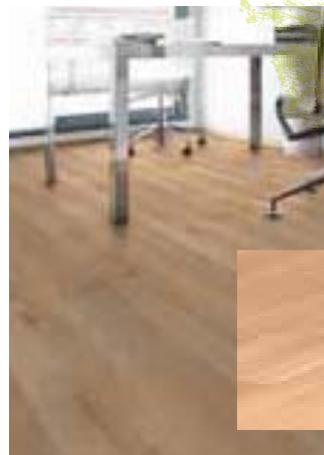

Dark and intense woods add character and sophistication - reinventing classic designs with style and increasing passion within exotic atmospheres.



▶ **RENZO**



0024 Chamois
WR: 0585 0896



0023 Cajou
WR: 0585 0195



0025 Taupe
WR: 0585 0135



0068 Pecan
WR: 0585 2341



0069 Noisette
WR: 0585 2340



0026 Chocolat
WR: 0585 2188

 Sheet with foam backing [Comfort] -  Sheet without foam backing [Compact] - WR: Welding Rods



SAMPLING SERVICE: Call Gerflor to request your samples!

TARALAY IMPRESSION

▶ WOOD



16.6 cm



0373 Noma Ice
WR: 0585 0580



16.6 cm



0371 Noma Rustic
WR: 0585 2336



16.6 cm



0367 Blade Clear
WR: 0585 0896



9 cm



0584 Cadix Brown
WR: 0585 0657



6.2 cm




0592 Ottawa Poplar
WR: 0585 0485



2.5 cm



0372 Lounge Chic
WR: 0585 0672

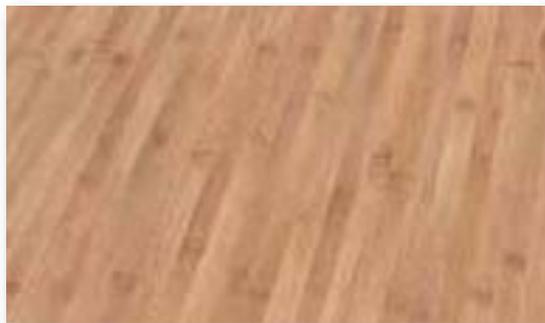

1.8 cm



0366 Bamboo Tea
WR: 0585 2142



5 cm



0587 Saturn Cherry
WR: 0585 0676

 Sheet with foam backing (Comfort) -  Planks width in cm - WR: Welding Rods



Lounge Chic

PRODUCT BENEFITS

Highly durable

- Pure PVC wearlayer.
- Group T abrasion rating.
- Suitable for high traffic areas.

Taralay Impression & Uni Comfort: the best resistance to indentation



Very High Density foam for Taralay Impression Comfort.

- VHD foam is reinforced with a compact interlayer to allow heavy loads to be spread evenly across the surface and offer rapid indentation recovery whilst providing excellent noise attenuation.



Very good dynamic load resistance eg. heavy wheeled furniture such as trolleys, hospital beds, etc.



- The VHD foam will reduce the effort required to push trolleys and other furniture across the floor.



Improved indentation resistance



- The flooring recovers rapidly from point indentation marks to its original smooth surface (0.11mm).



Taralay Impression Compact: excellent resistance to static and dynamic loads

- Excellent indentation resistance and recovery.
- Excellent dimensional stability - minimal rucking when heavy objects wheeled across surface.

Easy installation

- Does not discolour or cracks when formed for coving or skirting (no filler).
- Designed to be co-ordinated with Tarastep for the stairs.
- Perfect finish of the job when using cove formers and capping strips.

Stairs Tarastep

- The Tarastep range will assist visually impaired people as well as all other users differentiate between the stair riser due to the integral colour contrasted stair-nosing.

Personal care



- Provides cushioning underfoot.

- Excellent sound insulation properties:

Taralay Impression Comfort: 18 dB & Taralay Uni Comfort: 17 dB.



- Significantly reduces impact sound or walking resonance inside a room.

Hygienic

Sanosol®

- Suitable for use in damp, moist areas.
- Non absorbent, impermeable and non porous the flooring cannot decay.
- Inhibits the growth of micro-organisms that are harmful to human health.
- Can be hot welded to form a completely water tight finish.

Excellent chemical and stain resistance


Protacsol®

- This surface treatment and a 100% pure PVC wearlayer offer a smooth non porous surface which can withstand most commonly used chemicals including alcohols used in cleaning agents.
- Protacsol® surface treatment offers excellent stain resistance when compared to non treated equivalents.

Ease of maintenance

Protacsol®

- The original no-polish-for-life solution.
- This unique UV-cured polyurethane Protacsol® surface treatment protects the floorcovering and eliminates the need for costly emulsion dressings throughout the life of the product.
- Reduction of maintenance cost by up to 50% compared to non treated flooring.

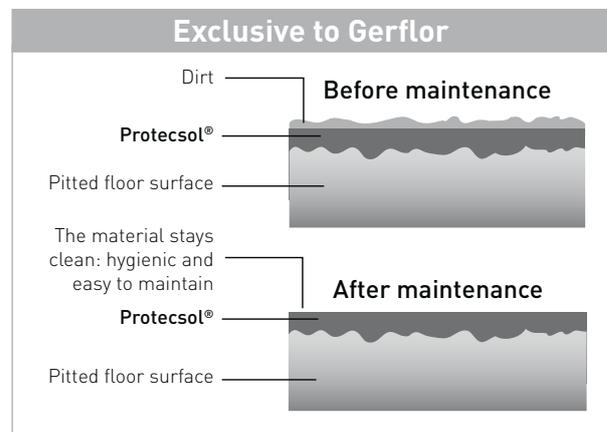


Eco friendly product

Protacsol®

- This surface treatment eliminates the need for polish / wax throughout the lifetime of the product and reduces the use of chemical cleaning agents.




- 100% recyclable: Gerflor vinyl floorcoverings can be fully recycled. Gerflor recycles almost 100% of its postmanufacturing waste.

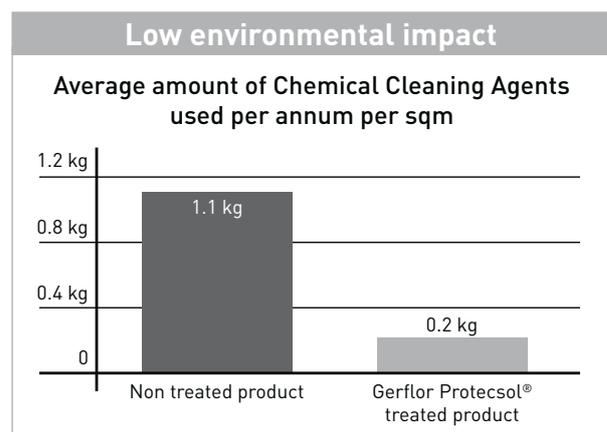

PRODUCT DESCRIPTION

TARALAY IMPRESSION COMFORT

		18 dB	Protocolsol®	Sanosol®	 100 % recyclable
---	---	-------	--------------	----------	--

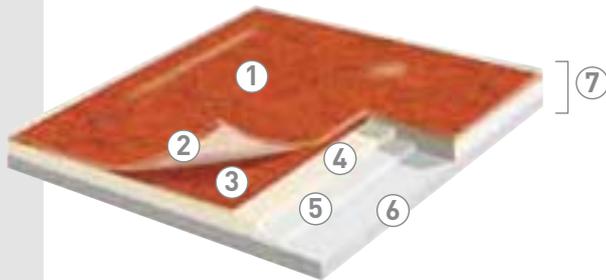

- 1 - Protocolsol® treatment
- 2 - Transparent wearlayer
- 3 - Printed design
- 4 - Compact layer
- 5 - Glass fibre
- 6 - VHD foam backing (Very High Density)
- 7 - Sanosol® treatment


TARALAY IMPRESSION COMFORT is a range of antistatic, acoustic foam backed vinyl floorcovering available in 2 m wide sheet form and offering 18 dB sound insulation. The product comprises a Very High Density (VHD) foam reinforced with glass fibre and a printed design that is protected by a transparent wear layer.

TARALAY IMPRESSION COMFORT is treated with Protocolsol®, a UV cured surface treatment which facilitates ease of maintenance and eliminates the need for acrylic emulsion (metallisation).

TARALAY IMPRESSION COMFORT has anti-static properties (AS Class 1) and incorporates Sanosol®, a bacteriostatic and fungistatic treatment.

TARALAY UNI COMFORT

		17 dB	Protocolsol®	Sanosol®	 100 % recyclable
---	---	-------	--------------	----------	--

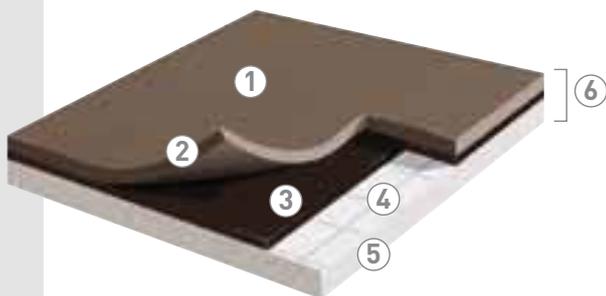

- 1 - Protocolsol® treatment
- 2 - Calendered wearlayer
- 3 - Compact layer
- 4 - Glass fibre
- 5 - VHD foam backing (Very High Density)
- 6 - Sanosol® treatment

TARALAY UNI COMFORT is an antistatic, acoustic foam backed vinyl floorcovering available in 2.00 m wide sheet form and offering 17 dB sound insulation.


TARALAY UNI COMFORT has a plain coloured design, making it ideal for cut design work.

The calendered wearlayer is treated with Protocolsol®, a UV cured, anti-glazing treatment, which facilitates ease of maintenance and eliminates the need for acrylic emulsion (metallisation).

The product comprises a Very High Density (VHD) foam reinforced with glass fibre. It incorporates Sanosol®, a bacteriostatic and fungistatic treatment.

TARALAY IMPRESSION COMPACT

 2 m	Protocolsol®	Sanosol®	 100 % recyclable
---	--------------	----------	--

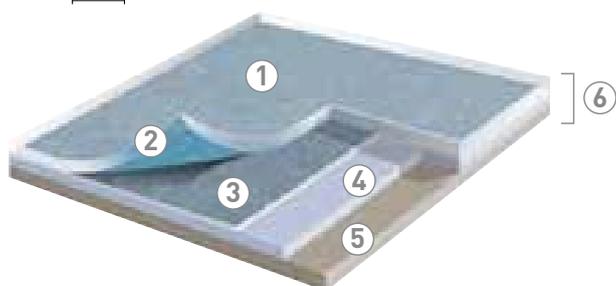

- | | |
|----------------------------|------------------------|
| 1 - Protocolsol® treatment | 4 - Glass fibre |
| 2 - Transparent wearlayer | 5 - Compact layer |
| 3 - Printed design | 6 - Sanosol® treatment |


TARALAY IMPRESSION COMPACT is a multilayered vinyl floorcovering, available in 2 m wide sheet (Group T abrasion rating). The product comprises a compacted backing reinforced with glass fibre and a printed design that is protected by a transparent wear layer.

TARALAY IMPRESSION COMPACT is treated with Protocolsol®, a UV cured surface treatment, which facilitates ease of maintenance and eliminates the need for acrylic emulsion (metallisation).

TARALAY IMPRESSION COMPACT has anti-static properties (AS Class 1) and incorporates Sanosol®, a bacteriostatic and fungistatic treatment.

TARASTEP

 1 m	18 dB	Sanosol®	 100 % recyclable
---	-------	----------	--

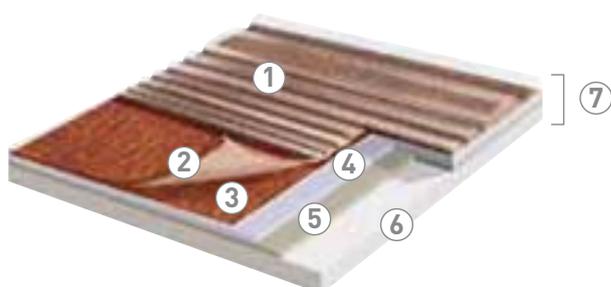

- | | |
|--------------------------------|------------------------|
| 1 - Ribbed & contrasted nosing | 4 - Compact layer |
| 2 - Transparent wearlayer | 5 - Glass fibre |
| 3 - Printed design | 6 - PVC foam backing |
| | 7 - Sanosol® treatment |



TARASTEP is a multilayered and foam backed complete step with a thickness of 0.85 mm. It comprises a printed design, a PVC transparent wear layer and a specific embossing on stair nosing for safety. It is an all-in-one staircovering comprising the stair tread, a ribbed nosing in a contrasted colour and the stair riser.

TARASTEP incorporates Sanosol®, a bacteriostatic and fungistatic treatment to prevent contamination.

TARASTEP provides high sound insulation (18 dB).

ACCESSORIES

- Easy to install: installation by over lapping.

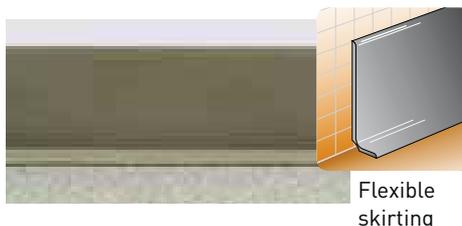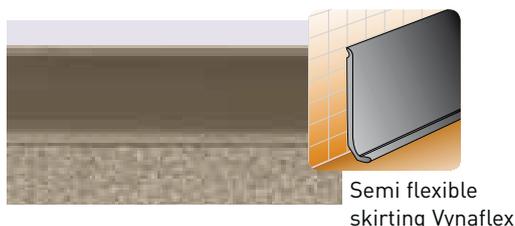

Refer to the "Finishes and Technical Solutions" catalogue for accessories.



SAMPLING SERVICE: Call Gerflor to request your samples!

TECHNICAL DATA

Taralay Uni Comfort	Taralay Impression Comfort	Taralay Impression Compact	Tarastep
	Chromatics - Diversion Oxygen - Organic Papyrus - Urban Renzo - Wood	Organic - Papyrus Urban - Wood	

DESCRIPTION

Total thickness	EN 428	mm	3.00	3.20	2.15	3.85
Thickness of wearlayer	EN 429	mm	0.65	0.65	0.70	0.85
Weight	EN 430	g/m ²	2300	2935	2805	3340
Width of sheet	EN 426	cm	200	200	200	101
Length of sheet	EN 426	lm	25	25	25	22

CLASSIFICATION

Norm / Product specification	-	-	EN 651	EN 651	EN 649	EN 651
European classification	EN 685	class	34 - 42	34 - 42	34 - 43	34 - 42
Fire rating	EN 13 501-1	class	Cfl-s1	Bfl-s1	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance	DIN 51130	class	R9	R10	R10	R10

PERFORMANCE

Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	EN 651	-	T	T	T	T
Dimensional stability	EN 434	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation: exigency	EN 433	mm	≤ 0.20	≤ 0.20	≤ 0.10	≤ 0.20
Residual indentation (Measure)	-	mm	0.11	0.11	≈ 0.03	0.13
Impact sound insulation	EN ISO 717-2	dB	17	18	-	18
Thermal conductivity	EN 12 524	W/(m.K)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN 423	-	OK	OK	OK	OK
Bacteriostatic and fungistatic treatment	-	-	Sanosol®	Sanosol®	Sanosol®	Sanosol®
Surface treatment	-	-	Protocolsol®	Protocolsol®	Protocolsol®	-

CE MARKING

CE	EN 14041	-			
		-			

INSTALLATION

Laying is under the responsibility of installer. Installation has to be in accordance with the state of art. Technical installation guidelines are available from our technical department. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours before installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

The images of floorcoverings in this catalogue have been reproduced as faithfully as printing technology permits.



COMMITTED TO SUSTAINABLE DEVELOPMENT

Gerflor recognizes the importance of being proactive and creating new ways to achieve sustainable development. This is why Gerflor is devoting substantial resources to environmental research.

Gerflor achievements can be summarized as follows:

HEALTH & SAFETY

Vinyl is a safe material largely used in the automotive, food packaging, healthcare and construction industries and for tools, medical disposables, which come into close and intimate contact with humans.

Gerflor uses the same grade of material to produce its floorcoverings.

- **No heavy metals, no solvent based inks, no phthalates and components rated as carcinogenic, no formaldehydes, no PCP.**
- No substance potentially subject to any REACH (Registration, Evaluation and Authorisation of Chemical) restrictions.
- **Low VOC emissions:** on average more than 70 % lower than European standards.
- **Fire resistance:** vinyl does not help fire spread and does not release toxic gases like chloride (Cl₂) and far less carbon monoxide (CO) than any other type of flooring.



Health & Safety



Committed for future generation



Recycling

RECYCLING

Vinyl is one of the only building materials that is **100% recyclable**. As a specialist vinyl flooring manufacturer, Gerflor has developed recycling programs for:

- **Post industrial waste recycling:** almost 100% of our manufacturing waste is recycled.
- **Post installation waste recycling:** In Europe Gerflor has started to organize the collection of post installation waste from large projects for recycling.
- **Post consumer waste recycling:** Gerflor vinyl floorings are fully recyclable at the end of their life and qualify for credits under many internationally accredited Green Building Schemes.



Second life product: It used to be a vinyl floor..



ISO 14001

ISO 14001

In Europe, less than 50% of manufacturers have achieved an ISO 14001 certification and Gerflor is one of them.

Gerflor industrial sites are certified ISO 14001 and are committed to continuously improving their environmental performance in terms of: air protection, reduction of energy consumption.



Gerflor Tarare manufacturing plant



Life Cycle Analysis

LIFE CYCLE ANALYSIS

Life Cycle Analysis is regarded as the ultimate means by which all environmental impacts are measured and improved upon during a product's life cycle. This assessment includes manufacture, delivery, installation, cost of ownership and maintenance, ultimate disposal and recycling of all products.

All new Gerflor product ranges are developed using a full life cycle analysis model.

- In Europe, Gerflor is actively involved with the ERFMI (European Resilient Flooring Manufacturer Institute) in preparing EU wide Life Cycle Assessment of a broad range of flooring types and specifications. From this study, a series of Environmental Product Declarations have been produced.
- In France, Gerflor has been involved with the SFEC to meet the HQE requirements.
- In the UK, all Gerflor products which match the BRE generic flooring specifications have been given either A or A+ ratings, with A+ representing the lowest environmental impact possible.



FDES: Environmental Product Declaration in France



green building council australia
MEMBER



DGNB
Deutscher Green Building Council



ARBEITSGEMEINSCHAFT
PVC UND UMWELT E.V.



gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

ASIA: Gerflor Asia

Tel: +852 9222 6355 - Fax: +852 3006 1449

e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd

Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119

e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH

Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218

e-mail: austriat@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux

Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14

e-mail: gerflorbelgium@gerflor.com

CANADA: Gerflor International

Tel: +1 450 538 9828 - Fax: +1 450 538 9827

e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor Floorings (CHINA) Co. Ltd.

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998

e-mail: gerflorchina@gerflor.com

FINLAND: Gerflor OY

Tel.: +358 (0) 10 617 5150 - Fax: +358 (0) 10 617 5152

e-mail: info@gerflor.fi

FRANCE: Gerflor - Service Express:

N°Azur 0 810 569 569 **N°Azur FAX 0 810 569 570**

PREMIER APPEL LOCAL

PREMIER APPEL LOCAL

e-mail: contactfrance@gerflor.com

GERMANY: Gerflor Mipolam GmbH

Tel: 0 22 41-25 30-0

e-mail: GerflorMipolam@Gerflor.com

Kunden-Service: kundenservice@gerflor.com

Tel: 0 22 41-25 30-131 - Fax: 0 22 41-25 30-100

SAT Service und Anwendungstechnik: Technik@Gerflor.com

Tel: 0 22 41-25 30-555 - Fax: 0 22 41-25 30-550

IRELAND: Gerflor Ltd

Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759

e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A.

Tel: +39 02 90 78 60 12 r.a. - Fax: +39 02 90 42 74 84

e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina

Tel: +55 11 38 48 20 20 - Fax: +55 11 38 48 20 23

e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East

Tel: +966 3 847 1779 - Fax: +966 3 847 1781

e-mail: gerflorME@gerflor.com

NETHERLANDS: Gerflor BV

Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89

e-mail: gerflorNL@gerflor.com

OTHER COUNTRIES: Gerflor International

Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o

Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33

e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA

Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44

e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor Moscow Office

Tel: +7 499 783 63 69 / 81 - Fax: +7 499 783 62 52

e-mail: gerflorrus@mspk.east.ru

SCANDINAVIA: Gerflor Scandinavia a.s.

Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80

e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA

Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85

e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd

Sample service: Contractuk@gerflor.com

Office Tel: + 44 (0) 1926 622 600 - Fax: +44 (0) 1926 622 616

USA: Gerflor North America

Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753

e-mail: info@gerflorusa.com



Health
& Safety



ISO 14001



Recycling



LCA
Life Cycle
Analysis

Committed to sustainable development

Gerflor[®]
theflooringgroup