


NEW

Decosmic
3 colours



INNOVATION

DECOSMIC



Wall
protection

▶ PROTECTION AND COVERING PANEL - METALLIC LOOK

Applications



With their slightly grained, matt surface, Decosmic panels protect and decorate the walls and doors in your premises while also meeting hygiene and impact resistance requirements. The metallic colours designed by SPM will embellish your spaces in an elegant, on-trend way (restaurant, hotel rooms, reception area, etc.) and bring a unique touch to your establishment.

Description

- Model: Decosmic protection and covering panel - metallic look
- Standard panel dimensions: 3 m x 1.30 m
- Custom options: cutting to size, bends into L/U, thermoformings, chamfers
- Thickness: 2 mm
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue or Gerflor universal mastic glue. Joints between panels can be made using silicone joints or PVC weld beads. Colour matched to the range
- Colours: 3 standard

Specification

- Description: protection and covering panel, metallic look (Decosmic as manufactured by Gerflor) from rigid and antibacterial PVC achieving Bs2d0 fire rating with solid colour and textured surface. 3 m long, 1.30 m wide, 2 mm thick.
- The level required for biocleaning should be validated for very high infectious risk areas such as operating theatres (sector 4) according to the Pasteur Institute of Lille (France). The chemical and mark resistance should have been proved on the usual cleaning products according to ISO 26987. The ease of nuclear decontamination according to ISO 8690 should be excellent.
- Environment: No heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/PBA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is under 15µg/m³. 100% of the product are recyclable.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions.

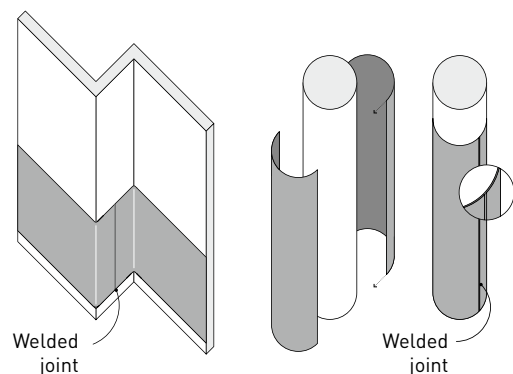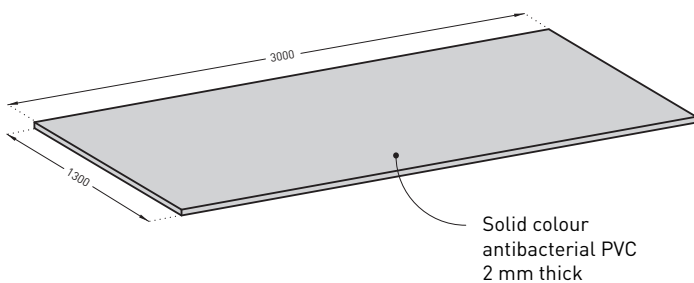

For an impeccable finish:

- Fin'alu : finishing or jointing profiles in satin silver anodised aluminium.
- Silicone joints _____ colour coordinated
- Weld bead _____ with the panels

Find out more about technical solutions at the end of the guide.

To find the colours available for each product, please see the summary table for the range at the end of this Guide.