



MIPOLAM® ACTION

gerflor.com
gerflor.asia



easy**care**™

Gerflor®
theflooringgroup




EASYCARE™

34-43

MIPOLAM® ACTION

easyCare™

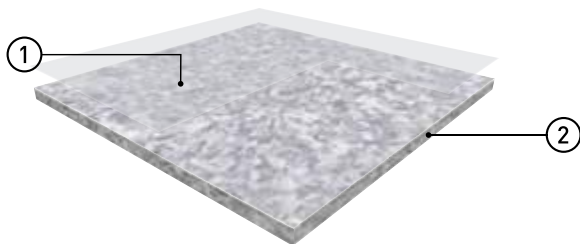

- ① EASYCARE™ surface treatment
- ② Compacted homogeneous floorcovering

- ☐ High performance flexible homogeneous multipurpose flooring
- ☐ EASYCARE™ surface treatment: Ease of maintenance
- ☐ Improved wear and ease of maintenance
- ☐ Incorporate bacteriostatic and fungistatic properties
- ☐ Antistatic
- ☐ Non-directional polychrome design, available in a large choice of 22 contemporary colours

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable, the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

MAINTENANCE

No emulsion dressing is required. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

 Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

MIPOLAM® ACTION

easy**care**™



EASYCARE™

34-43



0205* Beige



0220* Greige




0204 Light Grey



0223 Ash Grey




0203 Grey

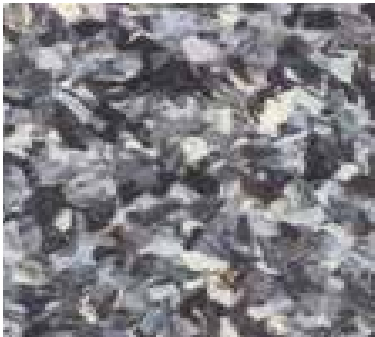

0215 Anthracite



Compact sheet, without foam backing

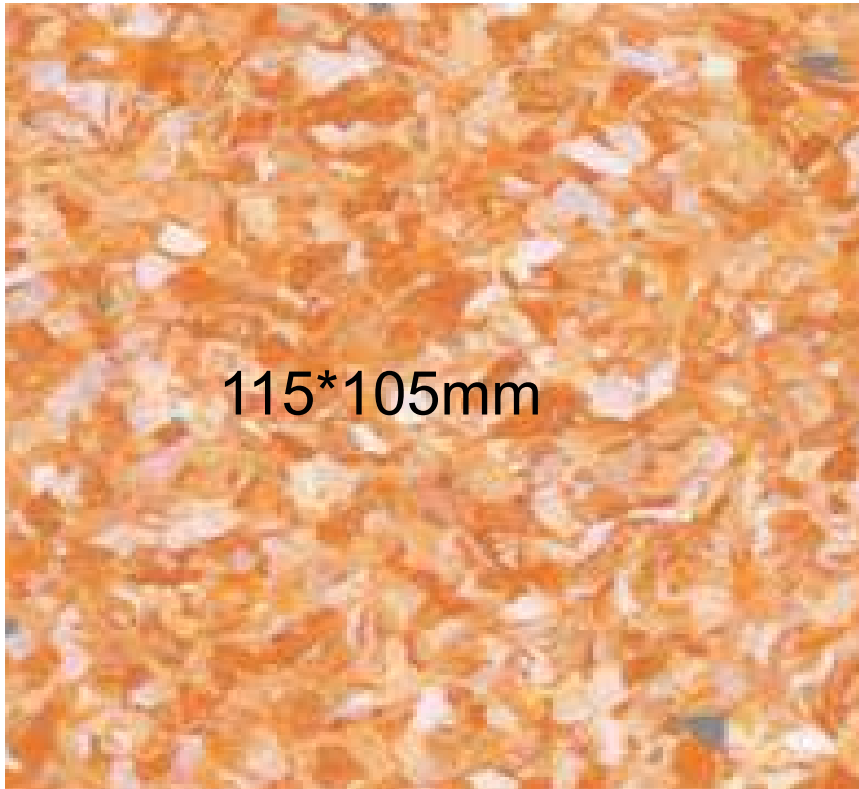

115*105mm

0201 Yellow



50*45mm

0214* Earth




0218 Brown



0206* Light Ocre



0225 Ginger

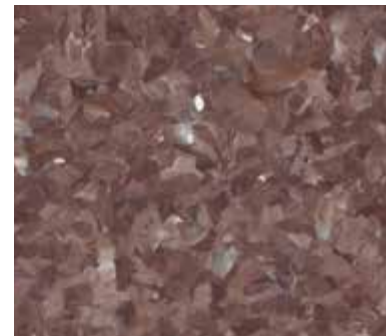

0219 Dark Brown






0212* Medium Blue



0222* Powder Blue



0221 Mint Green

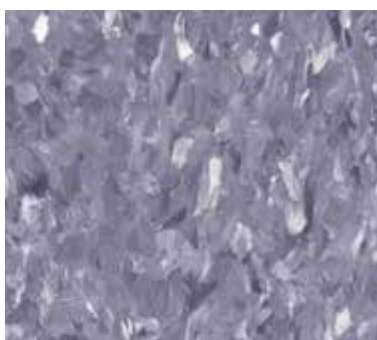

0226 Light Purple



0213 Medium Green




0207 Blue Grey



0217 Dark Green



0202 Apricot

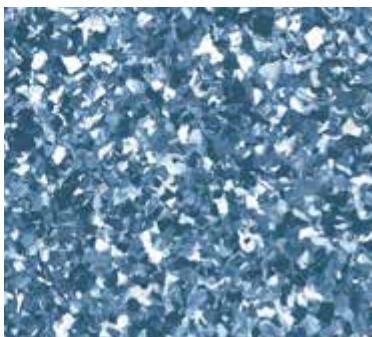

0216 Dark Blue



0224 Sea Blue



MIPOLAM® ACTION

DESCRIPTION

Total thickness	ISO 24346 (EN 428)	mm	2
Weight	ISO 23997 (EN 430)	g/m²	2980
Width / Length of sheet	ISO 24341 (EN 426)	cm / lm	200 / 20

CLASSIFICATION

Norm / Product specification	-	-	ISO 10581 (EN 649)
European classification	ISO 10874 (EN 685)	class	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	KV	<2
Electrical resistance	EN 1081	Ω	10 ⁹ -10 ¹⁰
Slip resistance dry	EN 13893	-	≥0.3
Slip resistance wet	DIN 51130	class	R9

PERFORMANCES

Wear resistance	EN 660.2	mm³	≤2.0
Wear group	EN 649	group	T
Type binder content	ISO 10581	type	I
Dimensional stability	ISO 23999 (EN 434)	%	≤ 0.4
Residual indentation	ISO 24343-1 (EN 433)	mm	≈0.04
Castor chair test	ISO 4918 (EN 425)	-	OK
Thermal conductivity	ISO 10456 (EN 12524)	W/(m.K)	≈0.25
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical products resistance	ISO 26987 (EN 423)	-	OK
Anti-bacterial and fungicidal treatment	-	-	OK
Surface treatment	-	-	EASYCARE™
Color number	-	-	22

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000 - 6	µg/m³	< 10
Certification	-	-	Floorscore®

CE MARKING

CE	EN 14041	-	
----	----------	---	---

MIPOLAM® ACTION is a flexible homogeneous pressed compacted floorcovering in sheet, with non-directional design color dyed as a raw mixture to ensure color throughout the thickness. Its surface is densely compacted for improved wear and ease of maintenance. It benefits from EASYCARE™ surface treatment swith good resistance to chemicals and to scuffing, and high resistance to scratches and staining. Easy to clean. No wax for life!

MIPOLAM® ACTION features bacteriostatic and fungistatic treatment. The flooring complies with the EN 649 (34-43) and has a Group T wear rating. It is suitable for heavy traffic areas.

Gerflor Don't forget our complementary ranges!



MIPOLAM® ACTION, LESS SPEAKING FOR MORE ACTIONS

COMPOSITION
100% REACH compliant
FREE of formaldehyde
FREE of heavy metals
FREE of solvent

RECYCLED
CONTENT
100% REACH compliant
recycled content

RECYCLABILITY
100% recyclable
product

INDOOR
AIR QUALITY
TVOC emissions between
10 and 100 times better than
norms requirements
Floorscore certified
No formaldehyde emission

WELLNESS
Health: Antibacterial activity
(inhibits growth > 99%)

Be connected!



#Gerflor



www.gerflor.com



GERFLOR ASIA Tel.: + 86-21-63578818